



- BAROLO is a small sized constant current downlight.
- Available in 30° & 60°.
- 3 SDCM
- L90/B10 50000h

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth



0.8W / 250mA



1W / 350mA


Code	No.LED	CCT*	Watt	Current**	Diameter	Beam Angle	
<i>0.8W / 250mA</i>							
LED.230	1	6000K	0.8W	250mA	25mm	30°	Dimmable
LED.231		4000K					
LED.232		3000K					
LED.233	1	6000K				60°	
LED.234		4000K					
LED.235		3000K					
<i>1W / 350mA</i>							
LED.227	1	6000K	1W	350mA	25mm	30°	Dimmable
LED.228		4000K					
LED.229		3000K					
LED.236	1	6000K				60°	
LED.237		4000K					
LED.238		3000K					

*Other colours available upon request.


**Adjustable intensity with ELECTRON dimmable constant current LED drivers.

Accessories


(Barolo LEDs not included)



ASL.050



ASL.051

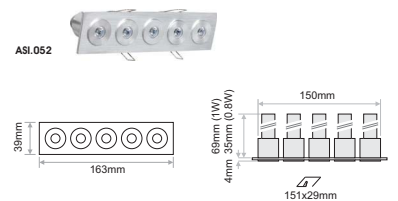

ASL.052