

ECLIPSE SF

(Surface)



- ECLIPSE is a complete series of round luminaires available for surface, pendant, recessed and trimless application.
- The surface version is offered either with Direct illumination (ECLIPSE SF) or with Direct illumination combined with a decorative Indirect lighting effect (ECLIPSE SF DECO).
- It consists of two models: High Power and High Efficiency.
- It is offered with a Low Glare (UGR<20.8*) as an option in the High Power model.
- It is offered with a Low UGR (UGR<18*) as an option in the High Efficiency model.
- Luminaire material: Aluminium.
- Cover material: PMMA
- Powder Coated: Black (RAL9005), White (RAL9003), or Grey (RAL7037) as standard.
- Custom luminaire colours also available on request.
- Low tolerances for colour temperature (MacAdam 3).
- Lumen maintenance L80/B10 50.000h
- Emergency Function capability. (3 hours, with build-in rechargeable battery).
- Indoor Use: IP40




LED source efficacy up to 195lm/W (4000K)

Luminaire efficacy up to 119lm/W (4000K)

Available upon request:

- ✓ Custom luminaire colours
- ✓ Emergency version

*Glare Evaluation: X=4H / Y=8H, S=0,25H, Reflection factors: 70/50/20

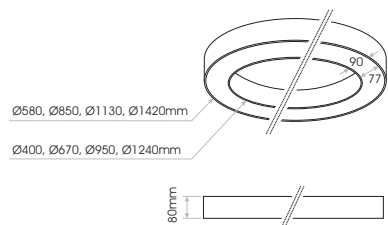





Model	Luminaire Colour*	CCT	Watt / Diameter	CRI** LED Source	CRI** LED Source	Type	Voltage	Dimming Option	Extras
ECLIPSE Surface High Power <i>(ECLIPSE SF HP)</i>	White <i>(WH)</i>	3000K <i>(30)</i>	HIGH POWER	≥ 80 <i>(80)</i> 3000K	≥ 80 <i>(80)</i> 4000K	Opal <i>(OP)</i>	230VAC <i>(230)</i>	Non Dimmable <i>(ND)</i>	Function Standard <i>(0)</i> Emergency <i>(1)</i>
	Black <i>(BL)</i>	4000K <i>(40)</i>	46.2W / 58cm <i>(46W058)</i>	6910lm	7310lm	Low Glare <i>(LG)</i> ***	Analogue <i>(A1)</i> (1-10V)		
	Grey <i>(GR)</i>	75W / 85cm <i>(75W085)</i>	11070lm	11740lm	DALI <i>(DL)</i>				
		104.5W / 113cm <i>(105W113)</i>	15490lm	16390lm	Wireless <i>(WL)</i>				
ECLIPSE Surface High Efficiency <i>(ECLIPSE SF HE)</i>			HIGH EFFICIENCY	≥ 80 <i>(80)</i> 3000K	≥ 80 <i>(80)</i> 4000K	Opal <i>(OP)</i>			
			17.6W / 58cm <i>(18W058)</i>	2940lm	3110lm	Low UGR <i>(LU)</i> ***			
			26.7W / 85cm <i>(27W085)</i>	4450lm	4720lm				
			37.2W / 113cm <i>(37W113)</i>	6230lm	6590lm				
			47.8W / 142cm <i>(48W142)</i>	8020lm	8480lm				

- * Custom luminaire colours available upon request.
- ** Available in CRI90 upon request.
- *** Low Glare (UGR<20.8), Low UGR (UGR<18)

Ordering Code Example: ECLIPSE SF HP-BL-30-105W113-80-LG-230-ND-0





ECLIPSE Surface

HIGH POWER
HIGH EFFICIENCY


	Ø580mm	Ø850mm	Ø1130mm	Ø1420mm
ECLIPSE Surface				
HIGH POWER	46W	75W	105W	134W
HIGH EFFICIENCY	18W	27W	37W	48W
Weight	3.63Kgs	5.48Kgs	7.42Kgs	10Kgs

Optional accessories



- PRH.111** Metal drilling Template for ECLIPSE SF Ø58cm
- PRH.112** Metal drilling Template for ECLIPSE SF Ø85cm
- PRH.113** Metal drilling Template for ECLIPSE SF Ø113cm
- PRH.114** Metal drilling Template for ECLIPSE SF Ø142cm

HIGH POWER



HIGH EFFICIENCY

