

LINILINE PDDI/PDDIAG

Square-Rectangle

(Pendant Direct-Indirect/Pendant Direct-Indirect Antiglare)




- Liniline is a complete series of linear recessed, trimless, surface and pendant luminaires.
- All models are available in standard or antiglare version to ensure visual comfort.
- Liniline series offers a variety of different light outputs that ensure uniformity and colour consistency.
- Nichia LEDs: L90/B10 >50.000h
- CREE LEDs: L90/B10 >50.000h
- 3 SDCM
- IP40


Lighting management options:

On-Off/DALI/0...10V/1...10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth

PDDI



PDDIAG




Available upon request:


- ✓ Custom dimensions
- ✓ Custom luminaire colours

53x53	53x78	53x103	53x128
	78x78	78x103	78x128
		103x103	103x128
			128x128




PDDI

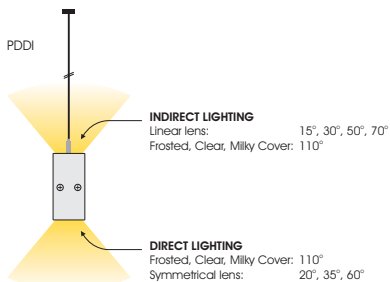

PDDIAG



Direct/Indirect:
Milky /Clear /Frosted cover

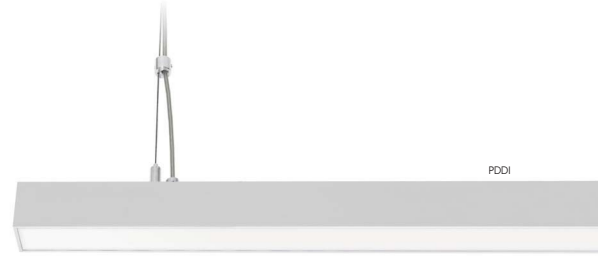


PDDI



PDDIAG

Direct:
Symmetrical

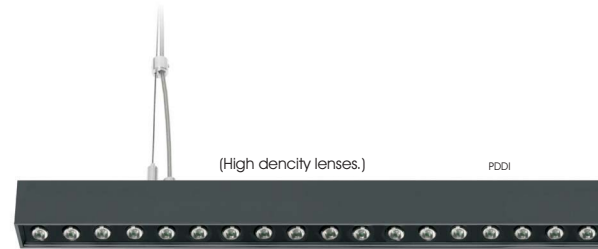

(High density lenses.)



PDDI



(High density lenses.)


PDDIAG

Direct:
Symmetrical

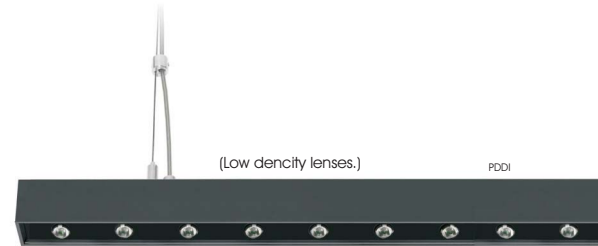

(Low density lenses.)

PDDI

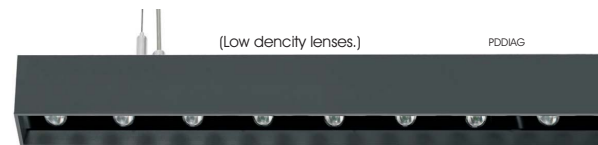

(Low density lenses.)

PDDIAG

LINILINE PDDI/PDDIAG


Square-Rectangle

(Pendant Direct-Indirect/Pendant Direct-Indirect Antiglare)


Standard Luminaire Colours:
Custom Colours available upon request




High density lenses
LINILINE PDDI/PDDIAG High efficiency

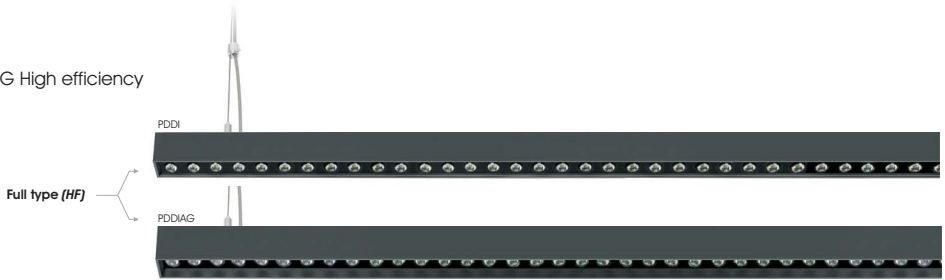


Low density lenses
LINILINE PDDI/PDDIAG High efficiency

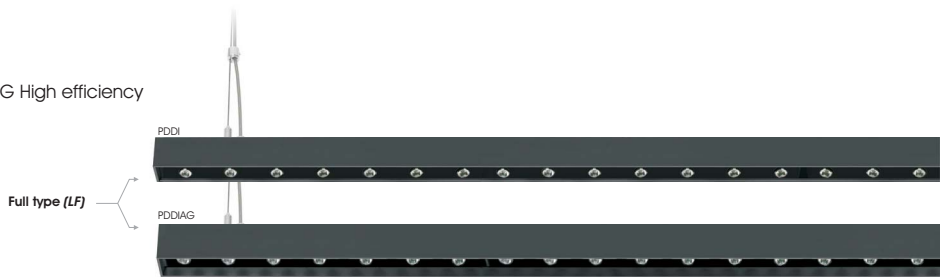


Canopy





- PRH.039** Canopy Surface WHITE
- PRH.082** Canopy Surface BLACK
- PRH.085** Canopy Surface LIGHT GREY





- PRH.040** Canopy Recessed WHITE
- PRH.083** Canopy Recessed BLACK
- PRH.086** Canopy Recessed LIGHT GREY



- PRH.041** Canopy Trimless WHITE
- PRH.084** Canopy Trimless BLACK
- PRH.087** Canopy Trimless LIGHT GREY

Model	Luminaire Colour	CCT*	CRI	Beam Angle	Watt*** / Length **	Voltage	Extras	
LINILINE PENDANT DIRECT/INDIRECT Square/Rectangle (LINILINE PDDI)	Anodized (AN)	2000K (20)	≥ 80 (80)	DIRECT LIGHTING  INDIRECT LIGHTING 	70W / 53x53cm (70W53x53)	24VDC (24)	Wire Rope & p.s. cable lengths 1,5m / p.s. cable (0) 3m / p.s. cable (1)	
		2500K (25)			91W / 53x78cm (91W53x78)			
	White (WH)	2700K (27)			112W / 53x103cm (112W53x103)			
		3000K (30)			133W / 53x128cm (133W53x128)			
	Black (BL)	4000K (40)			DIRECT & INDIRECT beam angle options With LED strip (Nichia LEDs) Frosted Cover (FRO) Clear Cover (CLE) Milky Cover (MIL)			112W / 78x78cm (112W78x78)
		5700K (57)						133W / 78x103cm (133W78x103)
	154W / 78x128cm (154W78x128)							
	154W / 103x103cm (154W103x103)							
	175W / 103x128cm (175W103x128)							
	196W / 128x128cm (196W128x128)							
20° High Density (20H) Symmetrical lens								
20° Low Density (20L) Symmetrical lens								
35° High Density (35H) Symmetrical lens								
35° Low Density (35L) Symmetrical lens								
60° High Density (60H) Symmetrical lens								
60° Low Density (60L) Symmetrical lens								



Model	Luminaire Colour	CCT*	CRI	Beam Angle	Watt*** / Length **	Voltage	Extras	
LINILINE PENDANT DIRECT/INDIRECT ANTIGLARE Square/Rectangle (LINILINE PDDIAG)	Anodized (AN)	2000K (20)	≥ 80 (80)	DIRECT LIGHTING  INDIRECT LIGHTING 	70W / 53x53cm (70W53x53)	24VDC (24)	Wire Rope & p.s. cable lengths 1,5m / p.s. cable (0) 3m / p.s. cable (1)	
		2500K (25)			91W / 53x78cm (91W53x78)			
	White (WH)	2700K (27)			112W / 53x103cm (112W53x103)			
		3000K (30)			133W / 53x128cm (133W53x128)			
	Black (BL)	4000K (40)			DIRECT & INDIRECT beam angle options With LED strip (Nichia LEDs) Frosted Cover (FRO) Clear Cover (CLE) Milky Cover (MIL)			112W / 78x78cm (112W78x78)
		5700K (57)						133W / 78x103cm (133W78x103)
	154W / 78x128cm (154W78x128)							
	154W / 103x103cm (154W103x103)							
	175W / 103x128cm (175W103x128)							
	196W / 128x128cm (196W128x128)							
20° High Density (20H) Symmetrical lens								
20° Low Density (20L) Symmetrical lens								
35° High Density (35H) Symmetrical lens								
35° Low Density (35L) Symmetrical lens								
60° High Density (60H) Symmetrical lens								
60° Low Density (60L) Symmetrical lens								



* Tunable white, RGB and RGBW models are available upon request (for direct and/or indirect lighting).

** For all Symmetrical and Oval lenses, 2000K and 2500K are NOT available.

*** Available in custom lengths, luminaire colours and power upon request.

**** The power (Watt) refers to all models with 21W Nichia LED strip and models with Low density Lenses.

To find the power of models with high density lenses use the formula **{(Power+14)x1.453}-14**

For example: The power of 78x103 model with high density lenses is **{(133+14)x1.453}-14=199.5W**

Ordering Code Example: LINILINE PDDI-AN-3080-60HML-175W103x128-24-1