


# LINILINE PENDANT DIRECT/INDIRECT

## Aluminium Profile

- Liniline pendant DIRECT/INDIRECT aluminium profile.
- Special design and construction to meet the most demanding lighting designs.
- Variety of accessories.
- Available either with lens or with cover (clear, frosted, satin).
- Available also in black, white or different RAL colours upon request.



## Pendant DIRECT/INDIRECT

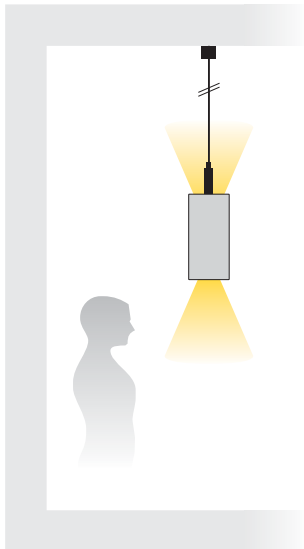





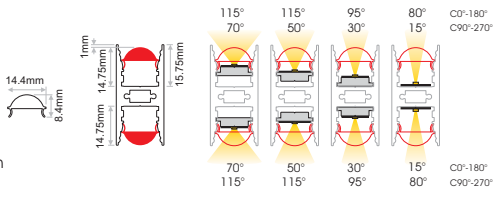


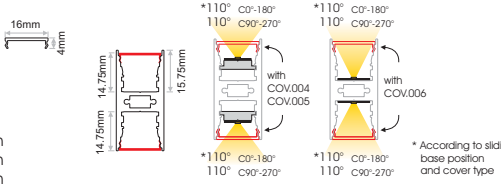
















Image	Code	Description	Length	Design-Detail	
	<b>PRF.012</b>	LINILINE PENDANT DIRECT/INDIRECT alum.prof. / Anodized	2m		
	<b>PRF.117</b>	SLIDING BASE alum.prof. / Anodized	2m		
	<b>COV.033</b>	PMMA LENS COVER Note: At 70° only 10mm LED strip width	2m		<p>Create any possible beam angle combination, by choosing cover and sliding base position</p> <p><b>Example:</b></p> 
	<b>COV.004</b> <b>COV.005</b> <b>COV.006</b>	PMMA CLEAR COVER PMMA FROSTED COVER PMMA SATIN COVER	2m 2m 2m		
				* According to sliding base position and cover type	
	<b>CAP.006</b>	END CAP ALUM.			
	<b>PRH.036</b>	HANGING SET FOR LINILINE PENDANT DIRECT/INDIRECT			
	<b>ACC.191*</b> <b>ACC.233*</b>	CEILING SUSPENSION 150cm CEILING SUSPENSION 300cm * Note: 2pcs needed for each luminaire			
	<b>PRH.085</b>	CANOPY SURFACE LIGHT GREY			
	<b>PRH.086</b>	CANOPY RECESSED LIGHT GREY			
	<b>PRH.087</b>	CANOPY TRIMLESS LIGHT GREY			
	<b>PRH.037</b>	CABLE RESTRAINT ON WIRE ROPE Note: 2pcs for 150cm & 3pcs for 300cm ceiling suspension			
	<b>PRH.038</b>	CABLE GLAND FOR LINILINE PENDANT			

Canopy also available in black, white or different RAL colours upon request.