




- Reform 30 is a complete series of miniaturized downlights available recessed, trimless or surface.
- It is available in round form.
- Power consumption: 3watt and 6watt.
- Beam angle varies from 12 to 50 degrees.
- Accessories available: honeycomb.
- Luminaire material: aluminium construction/ PC parts.
- It is offered in white and/or black colour as standard but RAL colours also are available on request.
- 3 SDCM
- L90/B10 50000h
- Low UGR ensuring visual comfort (UGR<14 /black inner ring).

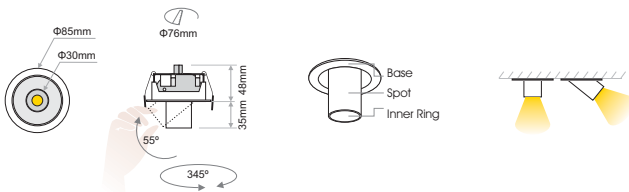


Model	LED Power	CCT*	CRI80, CRI90 LED Source	Beam Angle	Type	Luminaire Colour	Dimming Option	Accessories	
			80 (80) 90 (90)						
REFORM 30 Recessed <i>(REFORM 30 RC)</i>	3W (3)	2700K (27C)	310lm 250lm	12° (12)	Adjustable (AD)	Base White (W) Black (B) Spot White (W) Black (B) Inner Ring White (W) Black (B)	Without Driver (00)	(XXX) Standard (0) Honeycomb (1) Softening lens (2) Extras No Extras (0) Emergency (1)	
		3000K (30C)	310lm 265lm				Non Dimmable (ND)		
		4000K (40C)	330lm 290lm				Analogue (1-10V) (A1)		
		5000K (50C)	360lm 310lm				DMX (DX)		
	5.8W (6)	2700K (27C)	615lm 500lm	28° (28) 36° (36) 50° (50)			Spot White (W) Black (B)		DALI (DL)
		3000K (30C)	615lm 530lm				Push Button (PB)		
		4000K (40C)	665lm 575lm				Phase Cut (PC)		
		5000K (50C)	715lm 615lm				Wireless ** (WL)		
	3W (3)	2700K (27C)	396lm 320lm	28° (28) 36° (36) 50° (50)			Inner Ring White (W) Black (B)		
		3000K (30C)	396lm 342lm						
		4000K (40C)	428lm 369lm						
		5000K (50C)	428lm 396lm						
6.3W (6)	2700K (27C)	669lm 540lm	28° (28) 36° (36) 50° (50)						
	3000K (30C)	669lm 577lm							
	4000K (40C)	722lm 623lm							
	5000K (50C)	722lm 669lm							

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: REFORM 30 RC-3-40C-80-36-AD-WWB-00-00



Inner ring colour:
BLACK

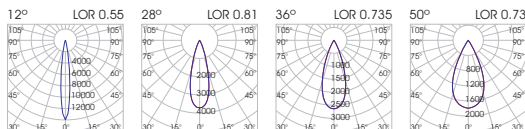

Inner ring colour:
WHITE

