


- Reform 75 is series of downlights available recessed or surface.
- It is available in round form.
- Power consumption : 23.5watt and 18watt.
- Beam angle varies from 17 to 50 degrees.
- Accessories available: honeycomb, line spread lens or softening lens.
- Luminaire material: aluminium construction/ PC parts.
- It is offered in white and/or black colour as standard but RAL colours also are available on request.
- 3 SDCM
- L90/B10 50.000h
- Low UGR ensuring visual comfort (UGR<15 /black inner ring).



Model (LED Power)	CCT*	CR180 LED Source	CR190 LED Source	Beam Angle	Type	Luminaire Colour	Dimming Option	Accessories
		80 (B0)	90 (90)					
<b>REFORM 75 Surface Spot 18W</b> <i>(REFORM 75 SFSP18)</i>	2700K (27C)	2067lm	1794lm	17° (17)	Adjustable (AD)	<b>Base</b> White (W) Black (B)  <b>Spot</b> White (W) Black (B)  <b>Inner Ring</b> White (W) Black (B)	Without Driver (00) Non Dimmable (ND)	Standard (0) Honeycomb (1) Line spread lens (2) Softening lens (3)  <b>EXTRAS</b> No Extras (0) Emergency** (1)
	3000K (30C)	2223lm	1931lm	27° (27)				
	4000K (40C)	2379lm	2067lm	50° (50)				
<b>REFORM 75 Surface Spot 23.5W</b> <i>(REFORM 75 SFSP24)</i>	2700K (27C)	2919lm	2409lm	17° (17)	Adjustable (AD)	<b>Base</b> White (W) Black (B)  <b>Spot</b> White (W) Black (B)  <b>Inner Ring</b> White (W) Black (B)	Without Driver (00) Non Dimmable (ND)	Standard (0) Honeycomb (1) Line spread lens (2) Softening lens (3)  <b>EXTRAS</b> No Extras (0) Emergency** (1)
	3000K (30C)	3102lm	2512lm	27° (27)				
	4000K (40C)	3192lm	2663lm	50° (50)				
5000K (50C)	3230lm	2791lm						

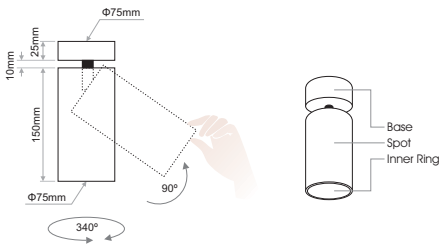


\* Models with CCTs of 3500K, 5000K & 6500K are available upon request.  
 \*\* External.

Ordering Code Example: REFORM 75 SFSP18-40C-80-50-AD-WWB-00-10



Inner ring colour:  
**BLACK**

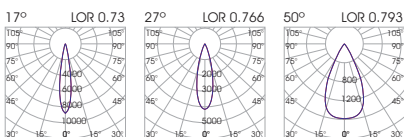

Inner ring colour:  
**WHITE**

