




Flexible LEDs

BASELINE TWIST MILKY LED

- Baseline TWIST Milky LED is a fully encapsulated, both Vertical & Horizontal bending flexible linear LED.
- Available in Pro or Standard Version.
- Material: Silicone
- Bin Step: Monochromatic White LEDs Silicone: 2SDCM
- L70B10 > 50000Hrs
- Available in IP67 protection rate.
- CRI > 90 for 2700/3000/3500/4000K
- Possibility to create straight or curved lines.
- Can be used both indoor and outdoor.
- Dot free lighting effect.
- IK 08 Protection.
- Can ideally be used with surface aluminium profile.



Max connection length:

- Monochromatic: 5 meters single supply

Lighting management options:
On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth

- ✓ UV Resistant
- ✓ Chemical Resistant



Connection IM IP67




Horizontal & Vertical bending






PRO

Code	No.LED/m	Watt/m	Reel(m)	CCT	CRI	Luminus FLUX (lm/m)	Voltage	Beam Angle	 *(mm)
BSL.000	120	10W	5	2700K	>90	610	24VDC	120°	50
BSL.001	120	10W	5	3000K	>90	618	24VDC	120°	50
BSL.002	120	10W	5	3500K	>90	630	24VDC	120°	50
BSL.003	120	10W	5	4000K	>90	650	24VDC	120°	50
BSL.004	120	10W	5	5000K	>80	660	24VDC	120°	50

* Please confirm with the >< sign on the rear side of the modules

Standard

Code	No.LED/m	Watt/m	Reel(m)	CCT	CRI	Luminus FLUX (lm/m)	Voltage	Beam Angle	 *(mm)
BSL.005	120	10W	5	2700K	>90	525	24VDC	120°	50
BSL.006	120	10W	5	3000K	>90	533	24VDC	120°	50
BSL.007	120	10W	5	3500K	>90	540	24VDC	120°	50
BSL.008	120	10W	5	4000K	>90	555	24VDC	120°	50
BSL.009	120	10W	5	5000K	>80	565	24VDC	120°	50

* Please confirm with the >< sign on the rear side of the modules







Connection IP67

Side Feed





Code for Single Colour	Description	Length
BSL.301	Side Feed BASELINE IP67	L=0.3m

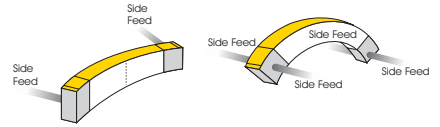

Bottom Feed





Code for Single Colour	Description	Length
BSL.302	Bottom Feed BASELINE IP67	L=0.3m



Front Feed




Code for Single Colour	Description	Length
BSL.300	Front Feed BASELINE IP67	L=0.3m

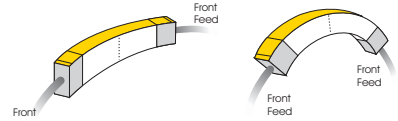

End Cap



Code for Single Colour	Description	Length
BSL.303	End Cap BASELINE IP67	



Accessories

Code	Description	Length	
PRF.421	BASELINE Aluminium Profile	2m	
PRF.190	BASELINE Bendable Stainless Steel Profile 17.5x16.5mm	0.5m	
PRH.088	Mounting Clips stainless steel 316 for BASELINE TWIST MILKY LED		