



- Linibox C is an outdoor luminaire suitable for surface installation.
- It is available in 3 different dimensions.
- Power supply cable required: 3x0,75mm² with maximum external diameter 7mm.
- It is available in black or white colour as standard but RAL colours are also available upon request.
- Dimming options for 8.4W & 12.7W: Without Driver, Phase Cut Dimmable, Non-Dimmable, 24VDC or 48VDC PWM Dimmable.
- Dimming options for 16.8W: Without Driver, Phase Cut Dimmable, Non-Dimmable or 48VDC PWM Dimmable.
- Ingress Protection: IP65
- Glare Rating: UGR <13.7 (17°), <13.1 (21°), <12.5 (25°), <20.6 (35°), <23.6 (62°), <15.7 (16°x30°)

L90/B10 >50.000h

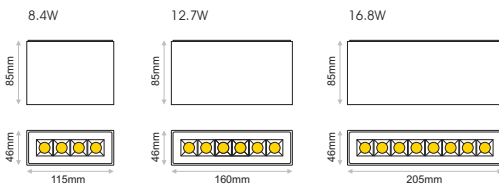

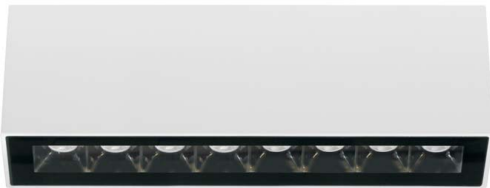

IP65

Model	LED Power	CCT	CRI80, CRI90 LED Source		Type	Beam Angle	Colour	Dimming Option
LINIBOX C (LINIBOX C)	8.4W (08)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	80 (80)	90 (90)	Fixed (FX)	17° (VN) 21° (NR) 25° (MD) 35° (WD) 62° (VW) 16°x30° (AS)	Black (BL) White (WH)	Without Driver (00)
			1060lm	860lm				230VAC Non-Dimmable (230ND)
			1120lm	980lm				230VAC Phase Cut Dimmable* (230D)
			1180lm	1060lm				24VDC PWM Dimmable (24D)
			1300lm	1125lm				48VDC PWM Dimmable (48D)
			12.7W (13)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)				1590lm
	16.8W (17)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	2120lm	1720lm				Without Driver (00) 230VAC Non-Dimmable (230ND) 230VAC Phase Cut Dimmable* (230D) 48VDC PWM Dimmable (48D)

* By trailing edge dimmers.

Ordering Code Example: LINIBOX C-17-40C-80-FX-MD-WH-ND

