



- Linibox W is a outdoor luminaire suitable for wall fixed installation.
- It is available in 3 different dimensions.
- Power supply cable required: 3x0,75mm² with maximum external diameter 7mm.
- It is available in black or white colour as standard but RAL colours are also available upon request.
- Dimming options for 8.4W & 12.7W: Without Driver, Phase Cut Dimmable, Non-Dimmable, 24VDC or 48VDC PWM Dimmable.
- Dimming options for 16.8W: Without Driver, Phase Cut Dimmable, Non-Dimmable or 48VDC PWM Dimmable.
- Ingress Protection: IP65
- Glare Rating: UGR <13.7 (17°), <13.1 (21°), <12.5 (25°), <20.6 (35°), <23.6 (62°), <15.7 (16°x30°)

L90/B10 >50.000h

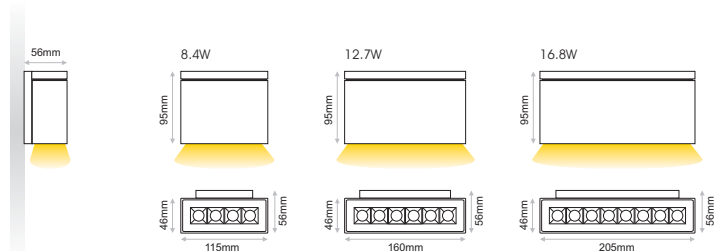

Fixed





Model	LED Power	CCT	CRI80, CRI90 LED Source		Type	Beam Angle	Colour	Dimming Option		
LINIBOX W (LINIBOX W)	8.4W (08)	2700K (27C)	1060lm	860lm	Fixed (FX)	17° (VN)	Black (BL)	Without Driver (00)		
		3000K (30C)	1120lm	980lm		21° (NR)	White (WH)	230VAC Non-Dimmable (230ND)		
		4000K (40C)	1180lm	1060lm		25° (MD)	230VAC Phase Cut Dimmable* (230D)			
		5000K (50C)	1300lm	1125lm		35° (WD)	24VDC PWM Dimmable (24D)			
	12.7W (13)	2700K (27C)	1590lm	1290lm		62° (VW)	Without Driver (00)	48VDC PWM Dimmable (48D)		
		3000K (30C)	1680lm	1470lm		16°x30° (AS)				
		4000K (40C)	1770lm	1590lm						
		5000K (50C)	1950lm	1690lm						
	16.8W (17)	2700K (27C)	2120lm	1720lm					230VAC Non-Dimmable (230ND)	
		3000K (30C)	2240lm	1960lm		230VAC Phase Cut Dimmable* (230D)				
		4000K (40C)	2360lm	2120lm						48VDC PWM Dimmable (48D)
		5000K (50C)	2600lm	2250lm						

* By trailing edge dimmers.

Ordering Code Example: LINIBOX W-13-30C-80-FX-MD-WH-ND



8.4W



12.7W



16.8W

