


LINILINE PD/PDAG


Square-Rectangle

(Pendant-Pendant Antiglare)

Interior Linear 

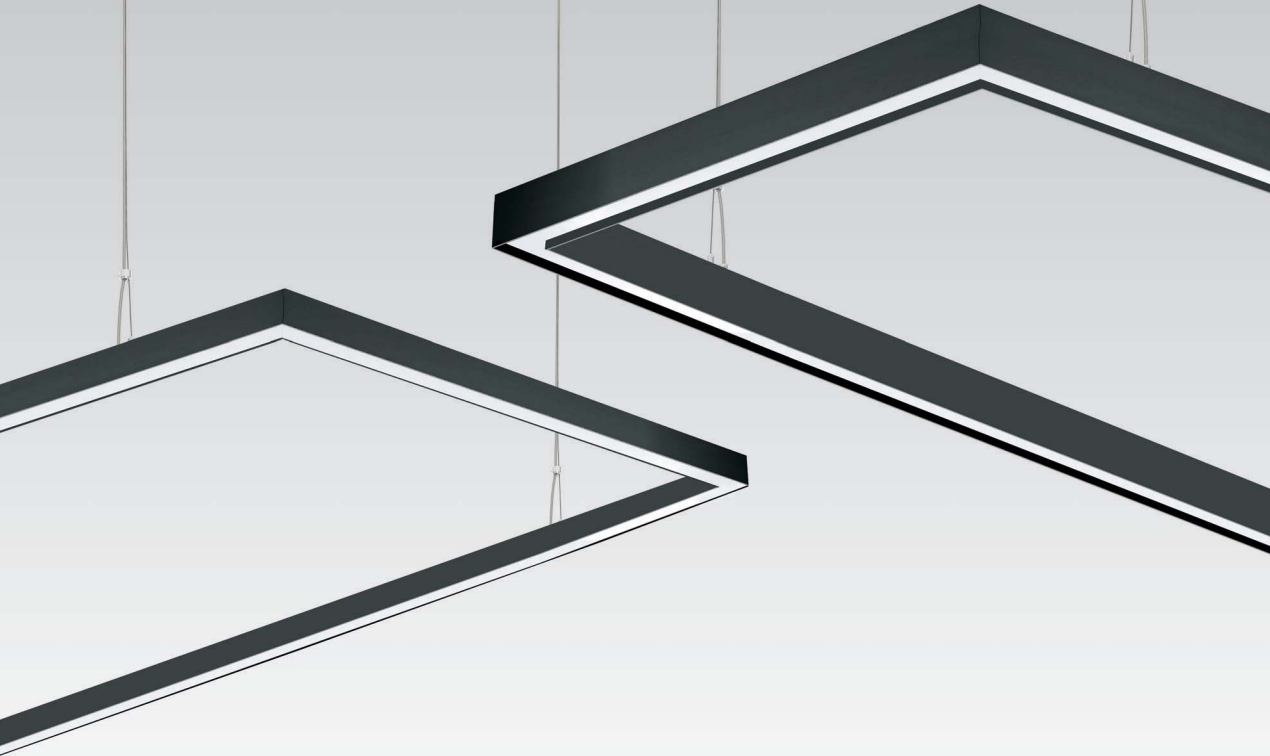

- Liniline is a complete series of linear recessed, trimless, surface and pendant luminaires.
- All models are available in standard or antiglare version to ensure visual comfort.
- Liniline series offers a variety of different light outputs that ensure uniformity and colour consistency.
- Nichia LEDs: L90/B10 >50.000h
- CREE LEDs: L90/B10 >50.000h
- 3 SDCM
- IP40





Lighting management options:
On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth




Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours



53x53	53x78	53x103	53x128
	78x78	78x103	78x128
		103x103	103x128
			128x128

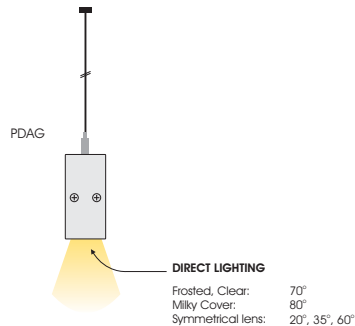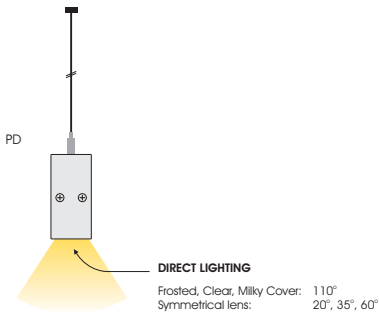



Direct/Indirect:
 Milky /Clear /Frosted cover

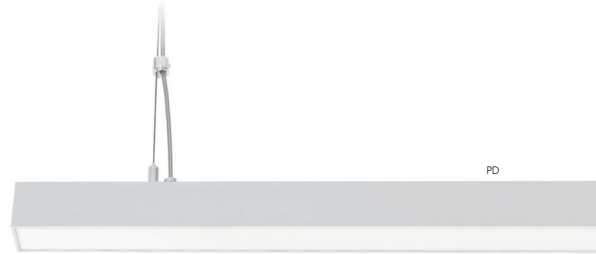

Direct:
 Symmetrical

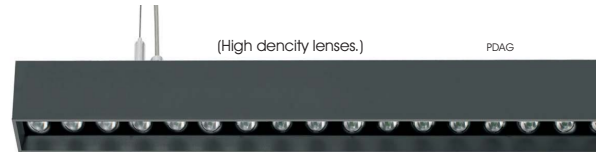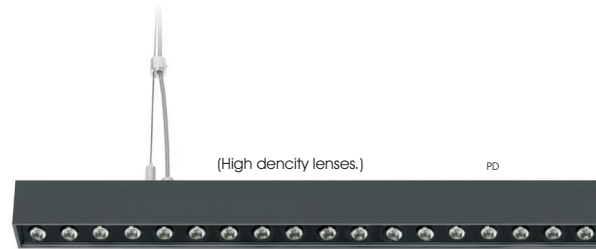

Direct:
 Symmetrical

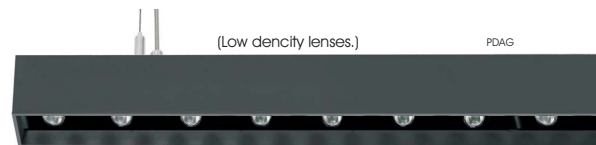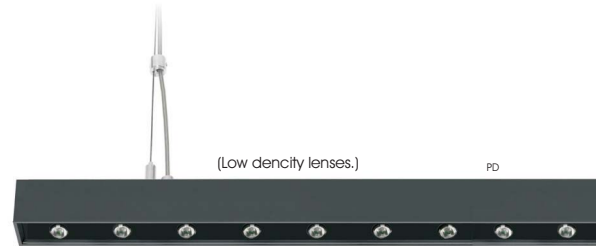


LINILINE PD/PDAG
Square-Rectangle
 (Pendant-Pendant Antiglare)


Standard Luminaire Colours:
 Custom Colours available upon request




High density lenses
 LINILINE PD/PDAG High efficiency

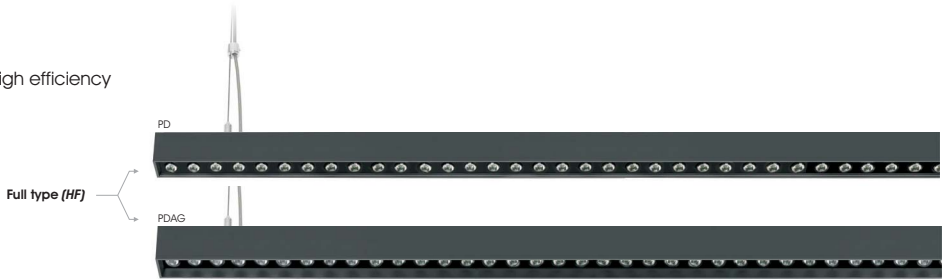


Low density lenses
 LINILINE PD/PDAG High efficiency

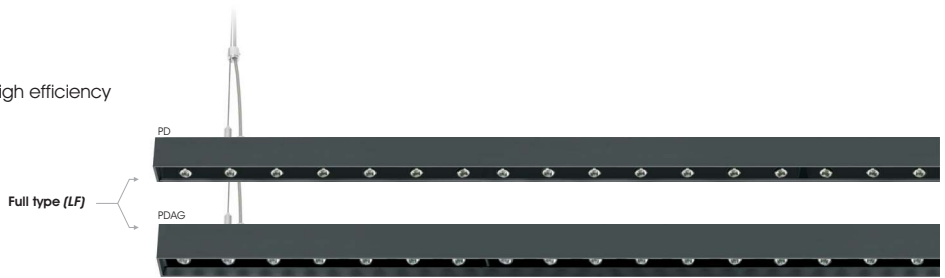


Canopy



- PRH.039** Canopy Surface WHITE
- PRH.082** Canopy Surface BLACK
- PRH.085** Canopy Surface LIGHT GREY




- PRH.040** Canopy Recessed WHITE
- PRH.083** Canopy Recessed BLACK
- PRH.086** Canopy Recessed LIGHT GREY



- PRH.041** Canopy Trimless WHITE
- PRH.084** Canopy Trimless BLACK
- PRH.087** Canopy Trimless LIGHT GREY

Model	Luminaire Colour	CCT*	CRI	Beam Angle	Watt*** / Length **	Voltage	Extras
LINILINE PENDANT Square/Rectangle (LINILINE PD)	Anodized (AN)	2000K (20)	≥ 80 (80)	With LED strip (Nichia LEDs)	42W / 53x53cm (42W53x53)	24VDC (24)	Wire Rope & p.s. cable lengths 1,5m / p.s. cable (0) 3m / p.s. cable (1)
	White (WH)	2500K (25)		Frosted Cover (FRO)	52,5W / 53x78cm (53W53x78)		
	Black (BL)	2700K (27)	Clear Cover (CLE)	63W / 53x103cm (63W53x103)			
		3000K (30)	Milky Cover (MIL)	73,5W / 53x128cm (74W53x128)			
	4000K (40)	With LED modules (CREE LEDs)					
	5700K (57)	20° High Density Symmetrical lens (20H)	63W / 78x78cm (63W78x78)				
		20° Low Density Symmetrical lens (20L)	73,5W / 78x103cm (74W78x103) 84W / 78x128cm (84W78x128)				
	35° High Density Symmetrical lens (35H)	84W / 103x103cm (84W103x103)					
		94.5W / 103x128cm (95W103x128)					
	35° Low Density Symmetrical lens (35L)	105W / 128x128cm (105W128x128)					
		60° High Density Symmetrical lens (60H)					
	60° Low Density Symmetrical lens (60L)						



- * Tunable white, RGB and RGBW models are available upon request.
- * For all Symmetrical and Oval lenses, 2000K and 2500K are NOT available.
- ** Available in custom lengths, luminaire colours and power upon request.
- *** The power (Watt) refers to all models with 21W Nichia LED strip and models with Low Density Lenses. Multiply the above watts by a factor of 1.9 to find the power of models with high density lenses.

Ordering Code Example: LINILINE PD-AN-3080-20H-95W103x128-24-1

Model	Luminaire Colour	CCT*	CRI	Beam Angle	Watt*** / Length **	Voltage	Extras
LINILINE PENDANT ANTIGLARE Square/Rectangle (LINILINE PDAG)	Anodized (AN)	2000K (20)	≥ 80 (80)	With LED strip (Nichia LEDs)	42W / 53x53cm (42W53x53)	24VDC (24)	Wire Rope & p.s. cable lengths 1,5m / p.s. cable (0) 3m / p.s. cable (1)
	White (WH)	2500K (25)		Frosted Cover (FRO)	52,5W / 53x78cm (53W53x78)		
	Black (BL)	2700K (27)	Clear Cover (CLE)	63W / 53x103cm (63W53x103)			
		3000K (30)	Milky Cover (MIL)	73,5W / 53x128cm (74W53x128)			
	4000K (40)	With LED modules (CREE LEDs)					
	5700K (57)	20° High Density Symmetrical lens (20H)	63W / 78x78cm (63W78x78)				
		20° Low Density Symmetrical lens (20L)	73,5W / 78x103cm (74W78x103) 84W / 78x128cm (84W78x128)				
	35° High Density Symmetrical lens (35H)	84W / 103x103cm (84W103x103)					
		94.5W / 103x128cm (95W103x128)					
	35° Low Density Symmetrical lens (35L)	105W / 128x128cm (105W128x128)					
		60° High Density Symmetrical lens (60H)					
	60° Low Density Symmetrical lens (60L)						



- * Tunable white, RGB and RGBW models are available upon request.
- * For all Symmetrical and Oval lenses, 2000K and 2500K are NOT available.
- ** Available in custom lengths, luminaire colours and power upon request.
- *** The power (Watt) refers to all models with 21W Nichia LED strip and models with Low Density Lenses. Multiply the above watts by a factor of 1.9 to find the power of models with high density lenses.

Ordering Code Example: LINILINE PDAG-AN-3080-35H-95W103x128-24-1