


- SKYTUBE linear luminaire is offered either for surface or pendant application.
- Tube Material: PMMA
- L90/B10 50000h (for monochromatic models)
- 3 SDCM (for monochromatic models)
- Ingress Protection: IP40

Lighting management options:  
On-Off/DALI/0...10V/1...10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth

**Available upon request:**

✓ Custom dimensions

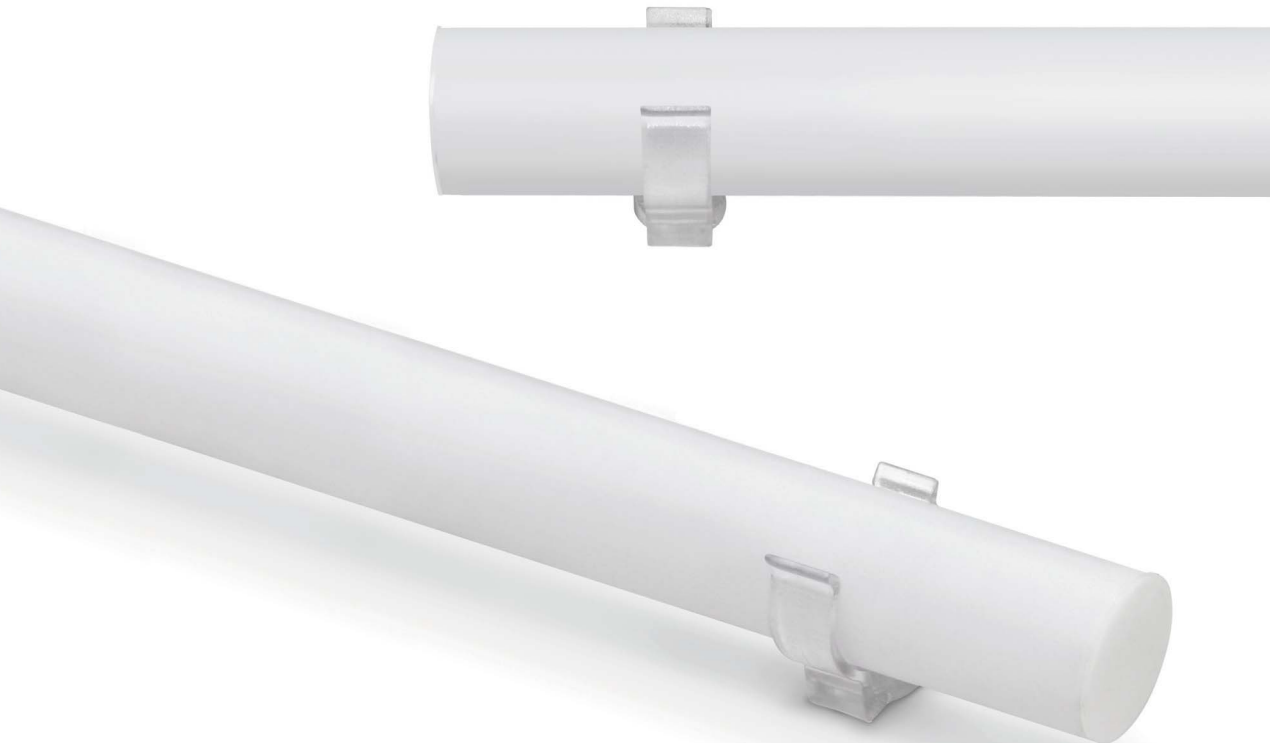

**Length:**


**for Monochromatic:**  
54/67.3/104/120.7/154/204cm

**for Tunable White:**  
54/79/104/129/154/195.7cm

**for RGBWW-RGBCW 84LED/m:**  
54/89.7/104/125.4/154/204cm

**for RGBWW-RGBCW 60LED/m, RGB 60LED/m, RGB 30LED/m:**  
54/84/104/124/154/204cm

**for RGB 96LED/m:**  
54/91.5/104/122.7/154/204cm

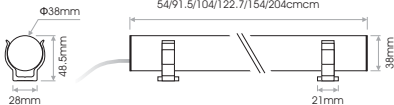

Holders  
(as standard)

Model	Colour Temperature	CRI	Watt / Length	Type	Voltage		
<b>SKYTUBE Surface</b> <i>(SKYTUBE SF)</i>	2000K <i>(20)</i>	80+ <i>(80)</i>	10.5W / 54cm <i>(11W054)</i>	Milky <i>(ML)</i>	24VDC <i>(24)</i>		
	2500K <i>(25)</i>		17.5W / 87.3cm <i>(18W087)</i>				
	2700K <i>(27)</i>		21W / 104cm <i>(21W104)</i>				
<b>SKYTUBE Pendant</b> <i>(SKYTUBE PD)</i>	3000K <i>(30)</i>	24.5W / 120.7cm <i>(25W121)</i>					
	4000K <i>(40)</i>	31.5W / 154cm <i>(32W154)</i>					
	5700K <i>(57)</i>	42W / 204cm <i>(42W204)</i>					
<b>TUNABLE WHITE</b>							
<b>Colour Temperature      CRI      Watt / Length</b>							
Tunable White 2700K~5700K <i>(TW)</i>	80+ <i>(80)</i>	10W / 54cm <i>(10W054)</i>					
		15W / 79cm <i>(15W079)</i>					
		20W / 104cm <i>(20W104)</i>					
		25W / 129cm <i>(25W129)</i>					
		30W / 154cm <i>(30W154)</i>					
<b>RGBWW / RGBCW / RGB</b>							
<b>Colour      Watt / Length</b>							
RGBWW <i>(RGBWW)</i> RGBCW <i>(RGBCW)</i> 84LED/m		13.5W / 54cm <i>(14W054)</i>					
		23.1W / 89.7cm <i>(23W090)</i>					
		27W / 104cm <i>(27W104)</i>					
		32.8W / 125.4cm <i>(33W125)</i>					
		40.5W / 154cm <i>(41W154)</i>					
<b>Colour      Watt / Length</b>							
RGBWW <i>(RGBWW)</i> RGBCW <i>(RGBCW)</i> 60LED/m*		9.7W / 54cm <i>(10W054)</i>					
		15.6W / 84cm <i>(16W084)</i>					
		19.5W / 104cm <i>(20W104)</i>					
		23.4W / 124cm <i>(23W124)</i>					
		29.2W / 154cm <i>(29W154)</i>					
<b>Colour      Watt / Length</b>							
RGB <i>(RGB96)</i> 96LED/m		11.5W / 54cm <i>(12W054)</i>					
		20.1W / 91.5cm <i>(20W092)</i>					
		23W / 104cm <i>(23W104)</i>					
		27.3W / 122.7cm <i>(27W123)</i>					
		34.5W / 154cm <i>(35W154)</i>					
<b>Colour      Watt / Length</b>							
RGB <i>(RGB60)</i> 60LED/m*		7.2W / 54cm <i>(07W054)</i>					
		11.6W / 84cm <i>(12W084)</i>					
		14.5W / 104cm <i>(15W104)</i>					
		17.4W / 124cm <i>(17W124)</i>					
		21.7W / 154cm <i>(22W154)</i>					
<b>Colour      Watt / Length</b>							
RGB <i>(RGB30)</i> 30LED/m*		3.6W / 54cm <i>(04W054)</i>					
		5.7W / 84cm <i>(06W084)</i>					
		7.2W / 104cm <i>(07W104)</i>					
		8.6W / 124cm <i>(09W124)</i>					
		10.8W / 154cm <i>(11W154)</i>					
<b>Colour      Watt / Length</b>							
			14.4W / 204cm <i>(14W203)</i>		12VDC <i>(12)</i>		

\* The LED density of these ribbons is low thus, the homogeneity of lighting surface of Milky type luminaire will be affected.

Ordering Code Example: SKYTUBE SF-30-80-25W121-ML-24