

LIMA DIFFUSED RC



- Lima series is a complete series of die cast aluminium luminaires.
- It is available in different wattage consumption and each model is offered in different lumen outputs.
- It is available in different beam angles, diffused and wall wash applications.
- It includes models for recessed and trimless installations.
- In terms of LED, it is available in different CCTs as standard and it can also be offered upon request (depending on the model)
 in tunable white TW and individual colours R,G,B,A.
- 3 SDCM
- L90/B10 50000h
- Constant current
- Indoor use: IP40



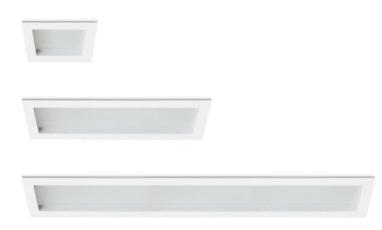











Model (LED Power)	сст	CRI80, CRI90 LED Source	Туре	Beam Angle	Luminaire Colour: Mask	Dimming Option	Accessories
		80 (80) 90 (90)					
LIMA Diffused 4W Recessed (LIMA DF 4 RC)	2700K (27C) 3000K (30C) 4000K (40C) 6500K (65C)	528lm 464lm 528lm 494lm 562lm 528lm 592lm -	Fixed (FX)	Diffused (DF)	White (WH) Black (BL)	Non Dimmable (i Analogue (1-10V) (i DMX	OO) COVER NDD Standard (07) A1) DD3 EXTRAS
LIMA Diffused 10W Recessed (LIMA DF 10 RC)	2700K (27C) 3000K (30C) 4000K (40C) 6500K (65C)	1320lm 1160lm 1320lm 1235lm 1405lm 1320lm 1480lm -				Push Button (iiii) Phase Cut (iii)	PB) No Extras (x0) Emergency Kit (x1)
LIMA Diffused 21W Recessed (LIMA DF 21 RC)	2700K (27C) 3000K (30C) 4000K (40C) 6500K (65C)	2640lm 2320lm 2640lm 2470lm 2810lm 2640lm 2960lm -					

^{*} The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: LIMA DF 10 RC-30C-80-FX-DF-WH-ND-00

