



- LINILUX linear luminaire is ideal for corridors in retail lighting due to its asymmetric & double asymmetric lenses.
- Suitable for surface or pendant application.
- L80/B10 50.000h
- 3 SDCM
- Emergency Function capability. (3 hours, with build-in rechargeable battery).
- Ingress Protection: IP40

**Available upon request:**


- ✓ Custom luminaire colours
- ✓ Emergency version

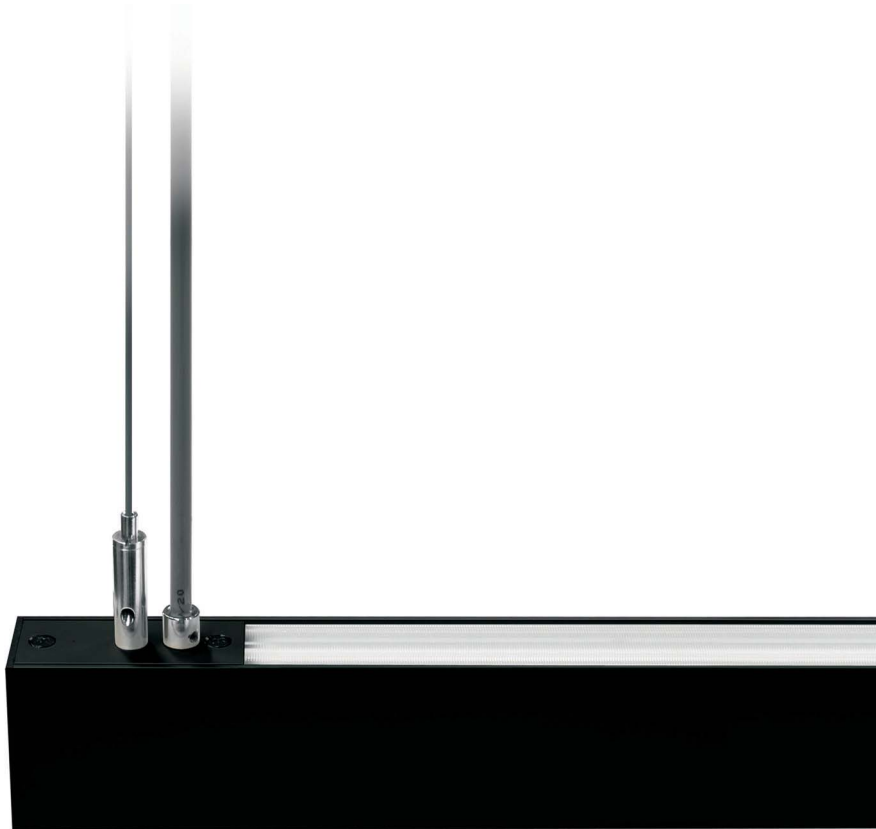



**LINILUX SF**  
(Surface)



**LINILUX PD**  
(Pendant)




**LINILUX PDDI**  
(Pendant Direct/Indirect)

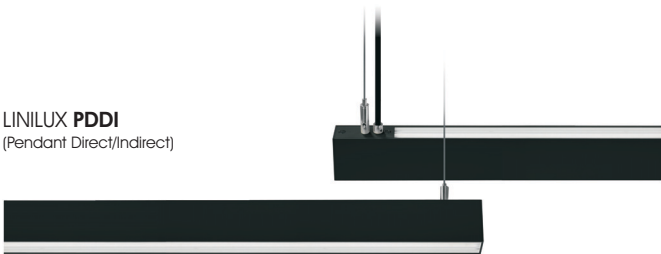


Model	Luminaire Colour	CCT	Watt / Length	CRI $\geq 80$ LED Source	Beam Angle	Voltage	Dimming Option	Extras	
$\geq 80$ (80)									
<b>LINILUX Surface</b> (LINILUX SF)	Anodized (AN)	2700K (27)	17.1W / 57cm (17W057)	2600lm	40° Lens (40)	230VAC (230)	Non Dimmable (ND)	Standard (0)	
	White (WH)		25.6W / 85cm (26W085)	3900lm	60° Lens (60)				
	Black (BL)		34.2W / 113cm (34W113)	5200lm	70° Lens (70)				
			42.7W / 141cm (43W141)	6500lm	90° Lens (90)				
			51.2W / 169cm (51W169)	7800lm	110° Lens (110)				
			59.8W / 197cm (60W197)	9100lm	145° Lens (145)				
			68.3W / 225cm (68W225)	10400lm	Asymmetric Lens (ASY)				
			76.8W / 253cm (77W253)	11700lm	Double Asymmetric Lens (DAS)				
			85.4W / 281cm (85W281)	13000lm					
	<b>LINILUX Pendant</b> (LINILUX PD)		3000K (30)	17.1W / 57cm (17W057)	2680lm			DALI (DL) Wireless (WL)	Emergency (1) function  Note: All 57cm and 85cm DALI, Analog (1-10), Wireless models are not available with emergency function.
				25.6W / 85cm (26W085)	4020lm				
				34.2W / 113cm (34W113)	5360lm				
		42.7W / 141cm (43W141)		6700lm					
		51.2W / 169cm (51W169)		8040lm					
		59.8W / 197cm (60W197)		9380lm					
		68.3W / 225cm (68W225)		10720lm					
		76.8W / 253cm (77W253)		12060lm					
		85.4W / 281cm (85W281)		13400lm					
		4000K (40)	17.1W / 57cm (17W057)	2810lm					
			25.6W / 85cm (26W085)	4215lm					
			34.2W / 113cm (34W113)	5620lm					
	42.7W / 141cm (43W141)		7025lm						
	51.2W / 169cm (51W169)		8430lm						
	59.8W / 197cm (60W197)		9835lm						
	68.3W / 225cm (68W225)		11240lm						
	76.8W / 253cm (77W253)		12645lm						
	85.4W / 281cm (85W281)		14050lm						

Ordering Code Example:  
LINILUX SF-AN-30-43W141-80-DAS-230-ND-1

Example:  
LINILUX SF  
Double Asymmetric Lens


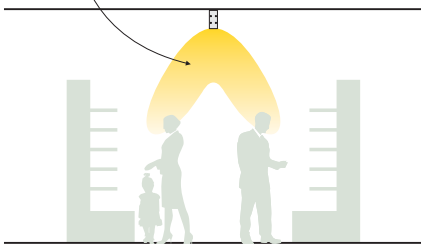


Example:  
LINILUX PD  
Double Asymmetric Lens

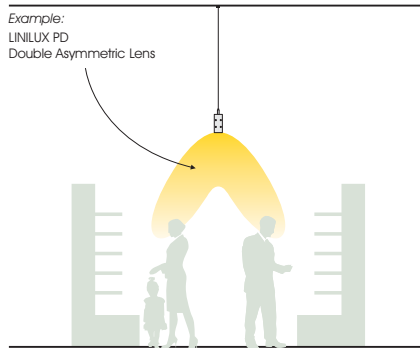

Model	Luminaire Colour	CCT	Watt / Length	CRI ≥80 LED Source DIRECT-INDIRECT	Beam Angle	Voltage	Dimming Option	Extras	
<b>LINILUX Pendant Direct/Indirect</b> <i>(LINILUX PDDI)</i>	Anodized <i>(AN)</i> White <i>(WH)</i> Black <i>(BL)</i>	2700K <i>(27)</i>	24.4W / 57cm <i>(24W057)</i>	2600 - 885lm	<b>DIRECT LIGHTING</b> ↓ (XXXXXXX) ↑ <b>INDIRECT LIGHTING</b>	230VAC <i>(230)</i>	Non Dimmable <i>(ND)</i> Analogue <i>(A1)</i> (1-10V) DALI <i>(DL)</i> Wireless <i>(WL)</i>	<b>EMERGENCY FUNCTION</b> ↓ (XX) ↑ <b>CONTROLS</b>	
			36.6W / 85cm <i>(37W085)</i>	3900-1475lm					
			48.8W / 113cm <i>(49W113)</i>	5200-2065lm					
			61.0W / 141cm <i>(61W141)</i>	6500-2650lm					
			73.2W / 169cm <i>(73W169)</i>	7800-3240lm					
			85.4W / 197cm <i>(85W197)</i>	9100-3830lm					
			93.3W / 225cm <i>(93W225)</i>	10400-4120lm					
			105.4W / 253cm <i>(105W253)</i>	11700-4710lm					
			117.5W / 281cm <i>(118W281)</i>	13000-5300lm					
			24.4W / 57cm <i>(24W057)</i>	2680 - 910lm					<b>DIRECT LENSES:</b> 40° Lens <i>(40)</i> 60° Lens <i>(60)</i> 70° Lens <i>(70)</i> 90° Lens <i>(90)</i> 110° Lens <i>(110)</i> 145° Lens <i>(145)</i> Asymmetric Lens <i>(ASY)</i> Double <i>(DAS)</i> Asymmetric Lens
			36.6W / 85cm <i>(37W085)</i>	4020-1520lm					
			48.8W / 113cm <i>(49W113)</i>	5360-2125lm					
	61.0W / 141cm <i>(61W141)</i>	6700-2735lm							
	73.2W / 169cm <i>(73W169)</i>	8040-3340lm							
	85.4W / 197cm <i>(85W197)</i>	9380-3950lm							
	93.3W / 225cm <i>(93W225)</i>	10720-4255lm							
	105.4W / 253cm <i>(105W253)</i>	12060-4860lm							
	117.5W / 281cm <i>(118W281)</i>	13400-5470lm							
	24.4W / 57cm <i>(24W057)</i>	2810 - 955lm	<b>INDIRECT LENSES:</b> 40° Lens <i>(40)</i> 60° Lens <i>(60)</i> 70° Lens <i>(70)</i> 90° Lens <i>(90)</i> 110° Lens <i>(110)</i> 145° Lens <i>(145)</i>						
	36.6W / 85cm <i>(37W085)</i>	4215-1595lm							
	48.8W / 113cm <i>(49W113)</i>	5620-2230lm							
	61.0W / 141cm <i>(61W141)</i>	7025-2870lm							
	73.2W / 169cm <i>(73W169)</i>	8430-3505lm							
	85.4W / 197cm <i>(85W197)</i>	9835-4145lm							
	93.3W / 225cm <i>(93W225)</i>	11240-4465lm							
	105.4W / 253cm <i>(105W253)</i>	12645-5100lm							
	117.5W / 281cm <i>(118W281)</i>	14050-5740lm							
24.4W / 57cm <i>(24W057)</i>	2810 - 955lm	<b>EMERGENCY FUNCTION:</b> Standard <i>(0)</i> Emergency <i>(1)</i> function  <i>Note for standard control:</i> All 57cm and 85cm models are not available with emergency function.  <i>Note for separated controls:</i> All 57cm, 85cm and 113cm models, are not available with emergency function.							
36.6W / 85cm <i>(37W085)</i>	4215-1595lm								
48.8W / 113cm <i>(49W113)</i>	5620-2230lm								
61.0W / 141cm <i>(61W141)</i>	7025-2870lm								
73.2W / 169cm <i>(73W169)</i>	8430-3505lm								
85.4W / 197cm <i>(85W197)</i>	9835-4145lm								
93.3W / 225cm <i>(93W225)</i>	11240-4465lm								
105.4W / 253cm <i>(105W253)</i>	12645-5100lm								
117.5W / 281cm <i>(118W281)</i>	14050-5740lm								
24.4W / 57cm <i>(24W057)</i>	2810 - 955lm		<b>CONTROLS:</b> Standard <i>(0)</i> Separated <i>(1)</i>  <i>Note:</i> With control option you can choose one control (standard) for Direct & Indirect lighting or two controls (Separated) for independent control of Direct and Indirect lightings.						
36.6W / 85cm <i>(37W085)</i>	4215-1595lm								
48.8W / 113cm <i>(49W113)</i>	5620-2230lm								
61.0W / 141cm <i>(61W141)</i>	7025-2870lm								
73.2W / 169cm <i>(73W169)</i>	8430-3505lm								
85.4W / 197cm <i>(85W197)</i>	9835-4145lm								
93.3W / 225cm <i>(93W225)</i>	11240-4465lm								
105.4W / 253cm <i>(105W253)</i>	12645-5100lm								
117.5W / 281cm <i>(118W281)</i>	14050-5740lm								


Ordering Code Example:  
LINILUX PDDI-AN-30-93W225-80-DAS110-230-ND-11

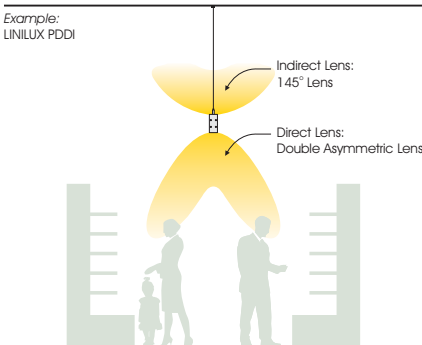

Accessories for Surface (SF)



PRH.102 Line alignment

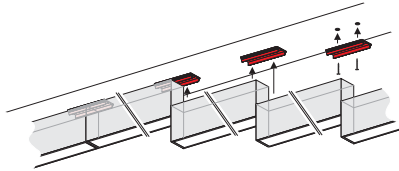


Accessories for Pendant (PD) & Pendant Direct/Indirect (PDDI)



Canopy Surface

- PRH.039 White
- PRH.082 Black
- PRH.085 Light Grey




Canopy Recessed

- PRH.040 White
- PRH.083 Black
- PRH.086 Light Grey




Canopy Trimless

- PRH.041 White
- PRH.084 Black
- PRH.087 Light Grey



PRH.101 Line alignment

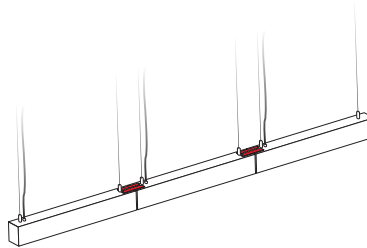

Polar Curves of lenses

