



- Crush is a downlight available either recessed or trimless.
- It is available in square or round form.
- Power consumption: varies from 6 to 18 watt.
- Beam angle: varies from 9 to 50 degrees.
- CRUSH is also available for LED lamps.
- Accessories available: honeycomb, linear spread lens, softening lens.
- Luminaire outer trim material: aluminium.
- Outer trim available in black or white as standard but custom colours also available upon request.
- 3 SDCM
- L90/B10 50000h
- Low UGR ensuring visual comfort (UGR < 15 for DEEP version models).
- Selection of IP protection: either IP20 or IP54 (face only).

RC



RC Double



RC Round



CRUSH















LD7, ST6, ST12, ST18, NB6, NB8, ZM6, ZM13



WD6, WD12, TW6, TW12



Name	Model Watt per LED	CCT	CR180, CR190 LED Source	Beam Angle	Luminaire Colour	Dimming Option	Accessories												
			80 (80) 90 (90)																
CRUSH RC (CRUSH RC)	Low Depth 7W (LD7)	2700K (27C)	930lm 762lm	30° (30)	White (WH) Black (BL)	Without Driver (00)													
		3000K (30C)	960lm 792lm			Non Dimmable (ND)													
		4000K (40C)	1020lm 840lm			Analogue (1-10V) (A1)													
		5000K (50C)	1020lm 840lm			DMX (DX) DALI (DL) Push Button (PB) Phase Cut (PC) Wireless** (WL)													
CRUSH RC Double* (CRUSH RC DB)							COVER Standard (0x0) Honeycomb (1x0) Linear Spread (2x0) Softening Lens (3x0)												
CRUSH RC Round (CRUSH RC RD)	Standard 6.2W (ST6)	2700K (27C)	704lm 568lm	19° (19) 35° (35) 50° (50)	White (WH) Black (BL)	Without Driver (00) Non Dimmable (ND) Analogue (1-10V) (A1) DMX (DX) DALI (DL) Push Button (PB) Phase Cut (PC) Wireless** (WL)													
		3000K (30C)	713lm 608lm																
		4000K (40C)	760lm 656lm																
		5000K (50C)	736lm 704lm																
	Standard 12.2W (ST12)	2700K (27C)	1590lm 1380lm	19° (19) 35° (35) 50° (50)				White (WH) Black (BL)	Without Driver (00) Non Dimmable (ND) Analogue (1-10V) (A1) DMX (DX) DALI (DL) Push Button (PB) Phase Cut (PC) Wireless** (WL)										
		3000K (30C)	1710lm 1485lm																
		4000K (40C)	1830lm 1590lm																
		5000K (50C)	1710lm 1590lm																
	Standard 18W (ST18)	2700K (27C)	2067lm 1794lm	19° (19) 35° (35) 50° (50)							White (WH) Black (BL)	Without Driver (00) Non Dimmable (ND) Analogue (1-10V) (A1) DMX (DX) DALI (DL) Push Button (PB) Phase Cut (PC) Wireless** (WL)							
		3000K (30C)	2223lm 1931lm																
		4000K (40C)	2379lm 2067lm																
		5000K (50C)	2223lm 2067lm																
Narrow Beam 6W (NB6)	2700K (27C)	616lm 497lm	9° (09)	White (WH) Black (BL)	Without Driver (00) Non Dimmable (ND) Analogue (1-10V) (A1) DMX (DX) DALI (DL) Push Button (PB) Phase Cut (PC) Wireless** (WL)														
	3000K (30C)	616lm 532lm																	
	4000K (40C)	665lm 574lm																	
	5000K (50C)	714lm 616lm																	
Narrow Beam 8W (NB8)	2700K (27C)	792lm 639lm	9° (09)				White (WH) Black (BL)	Without Driver (00) Non Dimmable (ND) Analogue (1-10V) (A1) DMX (DX) DALI (DL) Push Button (PB) Phase Cut (PC) Wireless** (WL)											
	3000K (30C)	792lm 684lm																	
	4000K (40C)	855lm 738lm																	
	5000K (50C)	918lm 792lm																	
Zoom 6.4W (ZM6)	2700K (27C)	704lm 568lm	22°~50° (2250)							White (WH) Black (BL)	Without Driver (00) Non Dimmable (ND) Analogue (1-10V) (A1) DMX (DX) DALI (DL) Push Button (PB) Phase Cut (PC) Wireless** (WL)								
	3000K (30C)	713lm 608lm																	
	4000K (40C)	760lm 656lm																	
	5000K (50C)	736lm 704lm																	
Zoom 13W (ZM13)	2700K (27C)	1306lm 1098lm	22°~50° (2250)	White (WH) Black (BL)	Without Driver (00) Non Dimmable (ND) Analogue (1-10V) (A1) DMX (DX) DALI (DL) Push Button (PB) Phase Cut (PC) Wireless** (WL)														
	3000K (30C)	1360lm 1150lm																	
	4000K (40C)	1435lm 1236lm																	
	5000K (50C)	1453lm 1236lm																	
Warm Dimming 0.2~6W (WD6)			90 (90) 95 (95)				19° (19) 35° (35) 50° (50)	White (WH) Black (BL)	Without Driver (00) Non Dimmable (ND) Analogue (1-10V) (A1) DMX (DX) DALI (DL) Push Button (PB) Phase Cut (PC) Wireless** (WL)										
	1800K-3000K (1830B)	636lm 518lm																	
Warm Dimming 12W (WD12)			90 (90) 95 (95)				19° (19) 35° (35) 50° (50)							White (WH) Black (BL)	Without Driver (00) Non Dimmable (ND) Analogue (1-10V) (A1) DMX (DX) DALI (DL) Push Button (PB) Phase Cut (PC) Wireless** (WL)				
	1800K-3000K (1830B)	1246lm 1045lm																	
Tunable White 5.9W (TW6)	2700K-5000K (2750B)	585lm					19° (19) 35° (35) 50° (50)			White (WH) Black (BL)	Without Driver (00) Non Dimmable (ND) Analogue (1-10V) (A1) DMX (DX) DALI (DL) Push Button (PB) Phase Cut (PC) Wireless** (WL)								
		(both CCT's driven)																	
Tunable White 11.5W (TW12)	2700K-5000K (2750B)	987lm					19° (19) 35° (35) 50° (50)										White (WH) Black (BL)	Without Driver (00) Non Dimmable (ND) Analogue (1-10V) (A1) DMX (DX) DALI (DL) Push Button (PB) Phase Cut (PC) Wireless** (WL)	
		(both CCT's driven)																	



ACR.054
Honeycomb
(as extra)



ACR.057
Linear Spread
(as extra)



ACR.059
Softening Lens
(as extra)

*CRUSH RC Double option example: CRUSH RC DB-ST12-30C-35-WH-00-000 will be with 2pcs from ST12 modules.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: CRUSH RC-ST18-30C-80-50-WH-DL-100

CRUSH LL




Model	Luminaire Colour:	Lamp Holder	Accessories
CRUSH RC LL <i>(CRUSH RC LL)</i>	White/White (WW) White/Black (WB) Black/Black (BB) Black/White (BW)	GU10 (max 7.5W) (G1)	COVER Standard (0x) Honeycomb (1x) Linear Spread (2x) Softening Lens (3x)
CRUSH RC Double LL <i>(CRUSH RC DB LL)</i>			IP RATE IP20 (10) IP54 (1)
CRUSH RC Round LL <i>(CRUSH RC RD LL)</i>			




Ordering Code Example:
 CRUSH RC LL-WW-G1-10




LD7




ST6/ ST12/ ST18/ WD6/ WD12/ TW6/ TW12

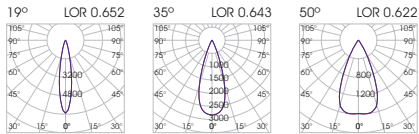


NB6/ NB8



ZM6/ ZM13




CRUSH RC




78x85mm

CRUSH RC Double




151x85mm


CRUSH RC Round



Φ92mm



(LD7)




(ST6), (NB6),
(WD6), (TW6)



(ST12), (NB8),
(WD12), (TW12)




(ST18)



(ZM6)



(ZM13)



LL