


- Lima series is a complete series of die cast aluminium luminaires.
- It is available in different power consumption and it is offered for recessed or trimless application.
- In terms of LED, it is available in different CCTs as standard and it can also be offered upon request (depending on the model) in tunable white TW and individual colours R,G,B,A.
- 3 SDCM
- L90/B10 50.000h
- Low UGR (UGR<16 /black mask, UGR<19 /white mask).
- Constant current
- Indoor use: IP40



ACC.345
Trimless base




71x37mm



ACC.346
Trimless base




131x38mm




ACC.390
Trimless base




251x38mm



LIMA Trimless 4



LIMA Trimless 10



LIMA Trimless 21




LIMA Trimless 4



LIMA Trimless 10




LIMA Trimless 21

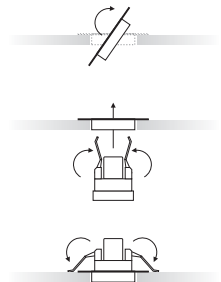

Model (LED Power)	CCT	CR180, CR190 LED Source	Type	Beam Angle	Luminaire Colour: Trim/Mask	Dimming Option	Accessories
LIMA 4W Trimless <i>(LIMA 4 TR)</i>	2700K (27C)	80 (80) 90 (90) 528lm 464lm	Fixed (FX)	15° (15)	White (WH) Black (BL)	Without Driver (00)	COVER Standard (0X) EXTRAS No Extras (0X) Emergency Kit (X1)
	3000K (30C)	528lm 494lm		30° (30)		Non Dimmable (ND)	
	4000K (40C)	562lm 528lm		50° (50)		Analogue (1-10V) (A1)	
	6500K (65C)	592lm -		15°x35° (1535)		DMX (DX) DALI (DL) Push Button (PB) Phase Cut (PC) Wireless* (WL)	
LIMA 10W Trimless <i>(LIMA 10 TR)</i>	2700K (27C)	1320lm 1160lm					
	3000K (30C)	1320lm 1235lm					
	4000K (40C)	1405lm 1320lm					
	6500K (65C)	1480lm -					
LIMA 21W Trimless <i>(LIMA 21 TR)</i>	2700K (27C)	2640lm 2320lm					
	3000K (30C)	2640lm 2470lm					
	4000K (40C)	2810lm 2640lm					
	6500K (65C)	2960lm -					

* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: LIMA 10 TR-30C-80-FX-50-WH-ND-00

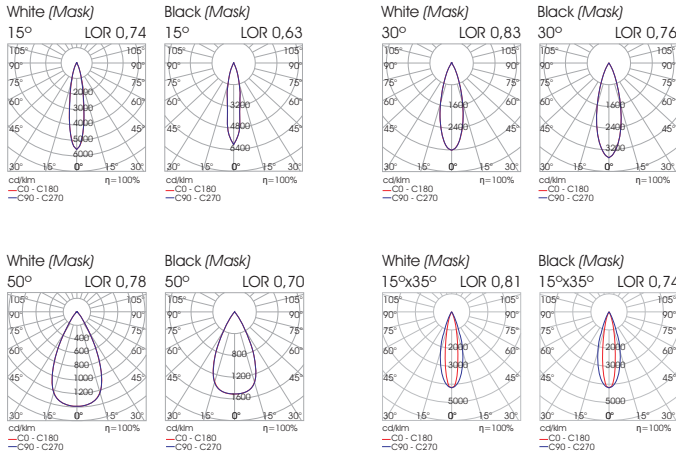

Luminaire Colour: Mask

