


Box series of outdoor spotlights consists of a complete series of 5 different models in terms of consumption, available with accessories for different installations (plastic spike, concrete base, tree belt or pole base). Ideal for minimal architectural applications with low glare level due to the design of the luminaire and the extra snoot accessory. It is available in black or white colour as standard but custom RAL colours are also available upon request. Marine treatment is also offered upon request ensuring higher resistance to weather, UV, water and mould growth.

- Ingress Protection: IP66
- IK Rate: IK06
- Glare Rating: UGR <12 (14°), <12.5 (16°), <9.3 (20°), <19.9 (34°), <23.4 (60°), <16.2 (16°x30°)
- Dimming options: Phase Cut Dimmable, Non-Dimmable or 48VDC PWM Dimmable.
- Power cable: H05RN-F 3x0.75mm² L=2.0m
- Outer cable diameter: 7mm²
- Weight: 1,53kg


L90/B10 50.000h

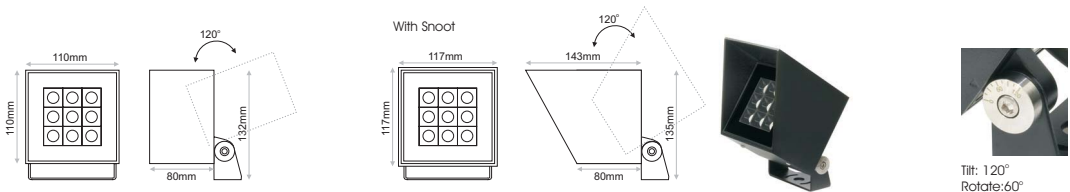

| Model | CCT | LED Source | Beam Angle | Colour | Dimming Option | Accessories |
|------------------------------|-------------|------------|------------|--------|-----------------------------------|--|
| BOX 20.7W (BOX 21) | 2700K (27C) | 2223lm | 14° | (W) | Black (BL) | cover Standard (0) SNOOT Black (1) SNOOT White (2) ↓ (XX) extras No Extras (0) Spike (1) Concrete Base (2) Belt (3) Pole Base** (4) |
| | 3000K (30C) | 2377lm | 16° | (NR) | White (WH) | |
| | 4000K (40C) | 2377lm | 20° | (MD) | | |
| | 6500K (65C) | 2668lm | 34° | (WD) | | |
| | | | | 60° | (VW) | |
| | | | 16°x30° | (AS) | | |
| | | | | | 230VAC Non-Dimmable (230ND) | |
| | | | | | 230VAC Phase Cut Dimmable* (230D) | |
| | | | | | 48VDC PWM Dimmable (48D) | |

* By trailing edge dimmers.
 ** Pole base supplied black as standard.

Ordering Code Example: BOX 21-30C-NR-BL-230D-01

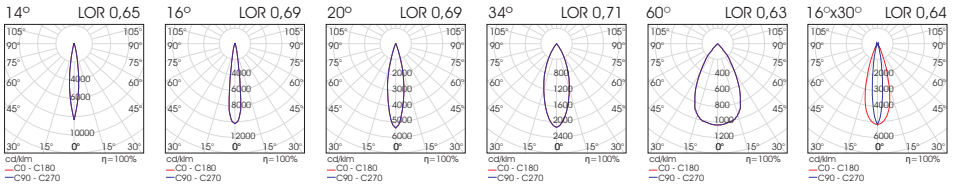

Accessories




ACR.006 Snoot Black
 ACR.007 Snoot White




ACR.008 Plastic Spike



ACR.009 Concrete base



ACR.078 Belt Accessory



ACR.111 Pole Base Black
 ACRW062 Pole Base White

