
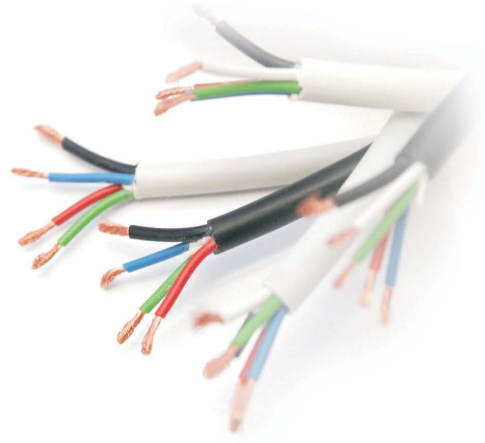




- 4wire or 5wire LED supply cable, RGB or RGBW in the corresponding colors and common return with cross section of 1qmm in black colour, to simplify the installation and minimize any mistakes.
- Twisted cores in layers and bending radius 8xO.D. static.

**4 Wires LED PVC Cables**

Code	Description	Cove Colours	Jacket Colour	Outer Diameter	Static Ambient Temperature
WIR.110	PVC high flexibility cable 3x0,50mm ² + 1x1mm ²	Red / Green / Blue / Black	Black	5.1mm	-20°C to +70°C
WIR.111	PVC high flexibility cable 3x0,50mm ² + 1x1mm ²	Red / Green / Blue / Black	White	5.1mm	-20°C to +70°C
WIR.115	PVC flexible UV resistant cable 3x0,50mm ² + 1x1mm ² (suitable for outdoor use)	Red / Green / Blue / Black	Light Grey	5.1mm	-20°C to +70°C

**5 Wires LED PVC Cables**

Code	Description	Cove Colours	Jacket Colour	Outer Diameter	Static Ambient Temperature
WIR.112	PVC high flexibility cable 4x0,50mm ² + 1x1mm ²	Red / Green / Blue / White / Black	Black	5.9mm	-20°C to +70°C
WIR.113	PVC high flexibility cable 4x0,50mm ² + 1x1mm ²	Red / Green / Blue / White / Black	White	5.9mm	-20°C to +70°C
WIR.114	PVC flexible UV resistant cable 4x0,50mm ² + 1x1mm ² (suitable for outdoor use)	Red / Green / Blue / White / Black	Light Grey	5.9mm	-20°C to +70°C

