


- Lima series is a complete series of die cast aluminium luminaires.
- It is available in different power consumption and it is offered for recessed or trimless application.
- In terms of LED, it is available in different CCTs as standard and it can also be offered upon request (depending on the model) in tunable white TW and individual colours R,G,B,A.
- 3 SDCM
- L90/B10 50.000h
- Constant current
- Indoor use: IP40



ACC.345
Trimless base




61x40mm



ACC.346
Trimless base






131x38mm




ACC.390
Trimless base



251x38mm




LIMA Trimless 4



LIMA Trimless 10



LIMA Trimless 21




Model (LED Power)	CCT	CRI80, CRI90 LED Source		Type	Beam Angle	Luminaire Colour	Dimming Option	Accessories
		80 (80)	90 (90)					
LIMA Diffused 4W Trimless <i>(LIMA DF 4 TR)</i>	2700K (27C)	528lm	464lm	Fixed (FX)	Diffused (DF)	White (WH) Black (BL)	Without Driver (00)	COVER Standard (0X) EXTRAS No Extras (X0) Emergency Kit (X1)
	3000K (30C)	528lm	494lm				Non Dimmable (ND)	
	4000K (40C)	562lm	528lm				Analogue (1-10V) (A1)	
	6500K (65C)	592lm	-				DMX (DX)	
							DALI (DL)	
							Push Button (PB)	
							Phase Cut (PC)	
							Wireless* (WL)	
LIMA Diffused 10W Trimless <i>(LIMA DF 10 TR)</i>	2700K (27C)	1320lm	1160lm					
	3000K (30C)	1320lm	1235lm					
	4000K (40C)	1405lm	1320lm					
	6500K (65C)	1480lm	-					
LIMA Diffused 21W Trimless <i>(LIMA DF 21 TR)</i>	2700K (27C)	2640lm	2320lm					
	3000K (30C)	2640lm	2470lm					
	4000K (40C)	2810lm	2640lm					
	6500K (65C)	2960lm	-					

* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:

LIMA DF 10 TR-30C-80-FX-DF-WH-ND-00

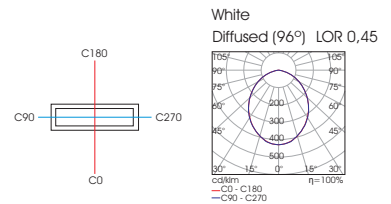

Luminaire Colour:

