

# LUMITUBE IP67 / IP68

Lumitube is an ultimate solution for exceptional lighting in any environment. For standard lengths or as custom made solution, Lumitube delivers outstanding performance, making it ideal for both IP67 and IP68 applications. Engineered with the highest-quality materials, Lumitube blends functionality with aesthetic appeal with the use of antiglare accessory, ensuring a visually pleasing result.

- Cable Gland & End Cap components: Nickel plated brass for IP67 and INOX-316 for IP68.
- Tube material: Transparent PMMA.
- Ingress Protection: Available in IP67 and IP68.
- L90/B10 >50.000h, 3 Step MacAdam (for monochromatic models).

Lighting management options:


On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth




L90/B10 50.000h

**Available upon request:**


✓ Custom dimensions



IP67

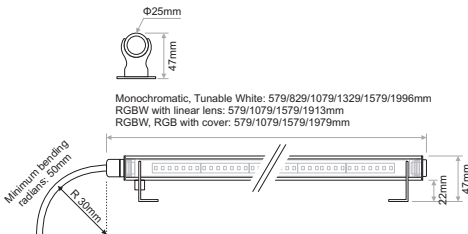

IP68

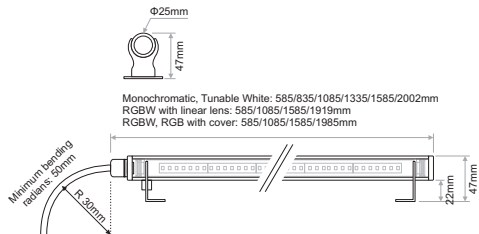



LUMITUBE IP67

LIGHTSOURCE BY  
**NICHIA**  
for Monochromatic

IP67

Model	Colour Temperature	CRI	Beam Angle	Watt / Length	Voltage
<b>LUMITUBE IP67*</b> (LUMITUBE IP67)	2000K (20)	80+ (80)	16° Linear lens (16L)	10.5W / 57.9cm (11W058)	24VDC (24)
	2500K (25)		35° Linear lens (35L)	15.8W / 82.9cm (16W083)	
	2700K (27)		55° Linear lens (55L)	21W / 107.9cm (21W108)	
	3000K (30)		100° Frosted Cover (100F)	26.3W / 132.9cm (26W133)	
	4000K (40)		100° Clear Cover (100C)	31.5W / 157.9cm (32W158)	
	5700K (57)		110° Milky Cover (110M)	40.3W / 199.6cm (40W200)	
<b>TUNABLE WHITE</b> Tunable White 2700K–5700K (TW)	(TW)	80+ (80)	16° Linear lens (16L)	10W / 57.9cm (10W058)	
			35° Linear lens (35L)	15W / 82.9cm (15W083)	
			55° Linear lens (55L)	20W / 107.9cm (20W108)	
			100° Frosted Cover (100F)	25W / 132.9cm (25W133)	
			100° Clear Cover (100C)	30W / 157.9cm (30W158)	
			110° Milky Cover (110M)	38.3W / 199.6cm (38W200)	
<b>RGBW</b> RGBW with linear lens (RGBW)			16° Linear lens (16L)	7.5W / 57.9cm (08W058)	
			35° Linear lens (35L)	15W / 107.9cm (15W108)	
			55° Linear lens (55L)	22.5W / 157.9cm (23W158) 27.5W / 191.3cm (28W191)	
<b>RGBW</b> RGBW with cover (RGBW)			100° Frosted Cover (100F)	9.8W / 57.9cm (10W058)	
			100° Clear Cover (100C)	19.5W / 107.9cm (20W108)	
			110° Milky Cover (110M)	29.5W / 157.9cm (30W158) 37.1W / 197.9cm (37W198)	
<b>RGB</b> RGB with cover (RGB)			100° Frosted Cover (100F)	7.3W / 57.9cm (07W058)	
			100° Clear Cover (100C)	14.5W / 107.9cm (15W108)	
			110° Milky Cover (110M)	21.8W / 157.9cm (22W158) 27.6W / 197.9cm (28W198)	

\* IP67: Short term immersion protection

Ordering Code Example:  
LUMITUBE IP67-TW-80-100C-15W083-24



LUMITUBE IP68

LIGHTSOURCE BY  
**NICHIA**  
for Monochromatic

IP68

Model	Colour Temperature	CRI	Beam Angle	Watt / Length	Voltage
<b>LUMITUBE IP68</b> <i>(LUMITUBE IP68)</i>	2000K <i>(20)</i>	80+ <i>(80)</i>	16° Linear lens <i>(16L)</i>	10.5W / 58.5cm <i>(11W059)</i>	24VDC <i>(24)</i>
	2500K <i>(25)</i>		35° Linear lens <i>(35L)</i>	15.8W / 83.5cm <i>(16W084)</i>	
	2700K <i>(27)</i>		55° Linear lens <i>(55L)</i>	21W / 108.5cm <i>(21W109)</i>	
	3000K <i>(30)</i>		100° Frosted Cover <i>(100F)</i>	26.3W / 133.5cm <i>(26W134)</i>	
	4000K <i>(40)</i>		100° Clear Cover <i>(100C)</i>	31.5W / 158.5cm <i>(32W156)</i>	
	5700K <i>(57)</i>		110° Milky Cover <i>(110M)</i>	40.3W / 200.2cm <i>(40W200)</i>	
<b>TUNABLE WHITE</b> Tunable White 2700K–5700K <i>(TW)</i>		80+ <i>(80)</i>	16° Linear lens <i>(16L)</i>	10W / 58.5cm <i>(10W059)</i>	
			35° Linear lens <i>(35L)</i>	15W / 83.5cm <i>(15W084)</i>	
			55° Linear lens <i>(55L)</i>	20W / 108.5cm <i>(20W109)</i>	
			100° Frosted Cover <i>(100F)</i>	25W / 133.5cm <i>(25W134)</i>	
			100° Clear Cover <i>(100C)</i>	30W / 158.5cm <i>(30W156)</i>	
110° Milky Cover <i>(110M)</i>	38.3W / 200.2cm <i>(38W200)</i>				
<b>RGBW</b> RGBW with linear lens <i>(RGBW)</i>			16° Linear lens <i>(16L)</i>	7.5W / 58.5cm <i>(08W059)</i>	
			35° Linear lens <i>(35L)</i>	15W / 108.5cm <i>(15W109)</i>	
			55° Linear lens <i>(55L)</i>	22.5W / 158.5cm <i>(23W159)</i>	
27.5W / 191.9cm <i>(28W192)</i>					
<b>RGBW</b> RGBW with cover <i>(RGBW)</i>			100° Frosted Cover <i>(100F)</i>	9.8W / 58.5cm <i>(10W059)</i>	
			100° Clear Cover <i>(100C)</i>	19.5W / 108.5cm <i>(20W109)</i>	
			110° Milky Cover <i>(110M)</i>	29.5W / 158.5cm <i>(30W159)</i>	
37.1W / 198.5cm <i>(37W199)</i>					
<b>RGB</b> RGB with cover <i>(RGB)</i>			100° Frosted Cover <i>(100F)</i>	7.3W / 58.5cm <i>(07W059)</i>	
			100° Clear Cover <i>(100C)</i>	14.5W / 108.5cm <i>(15W109)</i>	
			110° Milky Cover <i>(110M)</i>	21.8W / 158.5cm <i>(22W159)</i>	
27.6W / 198.5cm <i>(28W199)</i>					

Ordering Code Example:  
LUMITUBE IP68-TW-80-100C-15W084-24

**Input cables**

Input cable with IP68 connectors  
(as standard)



**Wall brackets**

Fixed 5,10,20,30cm Wall brackets INOX-316 (Set of 2) (as extra)




**ACR.145** 5cm Passivated  
**ACRW145** 5cm White RAL9003 mat  
**ACRB145** 5cm Black RAL 9005 mat

**ACR.146** 10cm Passivated  
**ACRW146** 10cm White RAL9003 mat  
**ACRB146** 10cm Black RAL 9005 mat

**ACR.147** 20cm Passivated  
**ACRW147** 20cm White RAL9003 mat  
**ACRB147** 20cm Black RAL 9005 mat


**ACR.148** 30cm Passivated  
**ACRW148** 30cm White RAL9003 mat  
**ACRB148** 30cm Black RAL 9005 mat

(RAL colours as extra upon request)

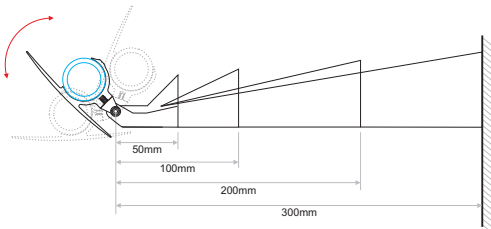

**Holders**

Inox Holders (Left-Right)  
(as standard)



**Antiflare**

Antiflare accessory (as extra)



**ACR.137** 58cm Anodized  
**ACRW137** 58cm White RAL9003 mat  
**ACRB137** 58cm Black RAL 9005 mat

**ACR.138** 83cm Anodized  
**ACRW138** 83cm White RAL9003 mat  
**ACRB138** 83cm Black RAL 9005 mat

**ACR.139** 108cm Anodized  
**ACRW139** 108cm White RAL9003 mat  
**ACRB139** 108cm Black RAL 9005 mat

**ACR.140** 60cm Anodized  
**ACRW140** 60cm White RAL9003 mat  
**ACRB140** 60cm Black RAL 9005 mat

**ACR.141** 133cm Anodized  
**ACRW141** 133cm White RAL9003 mat  
**ACRB141** 133cm Black RAL 9005 mat

**ACR.142** 191cm Anodized  
**ACRW142** 191cm White RAL9003 mat  
**ACRB142** 191cm Black RAL 9005 mat

**ACR.143** 198cm Anodized  
**ACRW143** 198cm White RAL9003 mat  
**ACRB143** 198cm Black RAL 9005 mat

**ACR.144** 200cm Anodized  
**ACRW144** 200cm White RAL9003 mat  
**ACRB144** 200cm Black RAL 9005 mat

(RAL colours as extra upon request)

