


- Poros recessed wall luminaire available in round and square.
- Housing material: Stainless steel 316
- Power cable : H05RN-F 2x0.75mm²=0.3m
- Outdoor installation: IP65
- Mounting Box material: PVC
- L70/B10 40.000h
- IK Rate: 10
- Non Dimmable

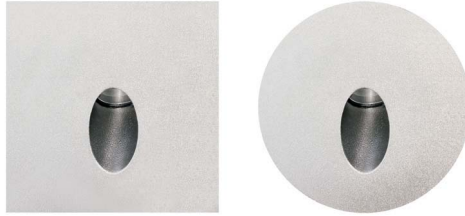

IP65

Code	Type	Watt	CCT*	CRI	Lumen	Beam Angle	Voltage	IP Rate	IK Rate
------	------	------	------	-----	-------	------------	---------	---------	---------

ROUND MONOCHROMATIC

ALW.030	Round	1.7W	5600K	80	34lm	80°	24VDC	IP65	IK10
ALW.031	Round	1.7W	3000K	80	31lm	80°	24VDC	IP65	IK10

*Available in 2700K upon request.

SQUARE MONOCHROMATIC

ALW.032	Square	1.7W	5600K	80	34lm	80°	24VDC	IP65	IK10
ALW.033	Square	1.7W	3000K	80	31lm	80°	24VDC	IP65	IK10

*Available in 2700K upon request.

