





- Reform 52 is a complete series of downlights available recessed, trimless or surface.
- It is available in round form.
- Power consumption : 12watt and 8.2watt.
- Beam angle varies from 6 to 44 degrees.
- Accessories available: honeycomb, line spread lens or softening lens.
- Luminaire material: aluminium construction/ PC parts.
- It is offered in white and/or black colour as standard but RAL colours also are available on request.
- 3 SDCM
- L90/B10 50000h
- Low UGR ensuring visual comfort (UGR<12 /black inner ring).

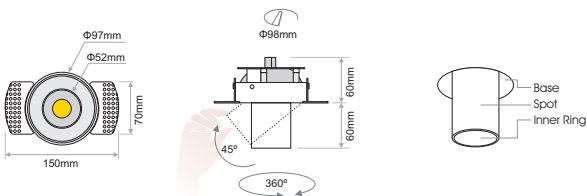


Model	LED Power	CCT*	CRI80, CRI90 LED Source	Beam Angle	Type	Luminaire Colour	Dimming Option	Accessories
			80 (80) 90 (90)					
<b>REFORM 52 Trimless</b> <i>(REFORM 52 TR)</i>	<b>8.2W</b> (B)	2700K (27C)	779lm 628lm	6° (06)	Adjustable (AD)	[XXXX] ↑ <b>Base</b> White (W) Black (B) ↑ <b>Spot</b> White (W) Black (B) ↑ <b>Inner Ring</b> White (W) Black (B)	Without Driver (00)	[XX] ↑ Standard (0) Honeycomb (1) Line spread lens (2) Softening lens (3) <b>EXTRAS</b> No Extras (0) Emergency (1)
		3000K (30C)	779lm 673lm				Non Dimmable (ND)	
		4000K (40C)	841lm 726lm				Analogue (1-10V) (A1)	
	<b>12W</b> (12)	2700K (27C)	1590lm 1380lm	21° (21)			DMX (DX)	
		3000K (30C)	1710lm 1485lm	33° (33)			DALI (DL)	
		4000K (40C)	1830lm 1590lm	44° (44)			Push Button (PB)	
5000K (50C)	1710lm 1590lm		Phase Cut (PC)					
						Wireless ** (WL)		

\* Models with CCTs of 3500K, 5000K & 6500K are available upon request.  
 \*\* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: REFORM 52 TR-12-40C-80-33-AD-WWB-00-01



Inner ring colour:  
**BLACK**

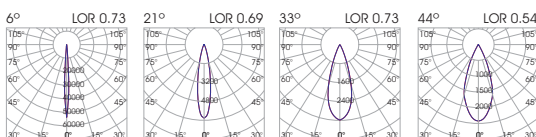

Inner ring colour:  
**WHITE**

