



- SANTI and SANTI MINI is a series of elegant recessed downlights with extra small trim.
- It is available either round or square.
- SANTI is also available in wash version.
- Power consumption: varies from 3 to 18 watt.
- Beam angle: varies from 9 to 50 degrees.
- SANTI DEEP version is also available for LED lamps.
- Accessories available: honeycomb, linear spread lens, softening lens.
- Available in black or white as standard but custom colours also available upon request.
- Luminaire outer trim material: aluminium.
- 3 SDCM
- L90/B10 50000h
- Low UGR ensuring visual comfort (UGR < 15 for DEEP version models).
- Selection of IP protection: either IP20 or IP54 (face only).

SANTI



SANTI MINI




SANTI



LD7, ST6, ST12, ST18, NB6, NB8, ZM6, ZM13

WD6, WD12, TW6, TW12

Name	Shape*	Model	CCT	CRI80, CRI90 LED Source		Beam Angle	Luminaire Colour	Dimming Option	Accessories	
				80 (80)	90 (90)					
SANTI (SANTI)	Round (RD)	Low Depth 7W (LD7)	2700K (27C)	930lm	762lm	30° (30)	White (WH) Black (BL)	Without Driver (00)		
			3000K (30C)	960lm	792lm			Non Dimmable (ND)		
SANTI ADJ (SANTI A)	Square (SQ)		4000K (40C)	1020lm	840lm			Analogue (1-10V) (A1)		
			5000K (50C)	1020lm	840lm			DMX (DX)		
								DALI (DL)		
SANTI WASH (SANTI W)		Standard 6.2W (ST6)	2700K (27C)	704lm	568lm	19° (19)		Push Button (PB)		
			3000K (30C)	713lm	608lm	35° (35)		Phase Cut (PC)		
			4000K (40C)	760lm	656lm	50° (50)		Wireless*** (WL)		
			5000K (50C)	736lm	704lm					
						WASH**				
						17° (17)				
		Standard 12.2W (ST12)	2700K (27C)	1590lm	1380lm	23° (23)				
			3000K (30C)	1710lm	1485lm	32° (32)				
			4000K (40C)	1830lm	1590lm					
		Standard 18W (ST18)	2700K (27C)	2067lm	1794lm					
			3000K (30C)	2223lm	1931lm					
			4000K (40C)	2379lm	2067lm					
			5000K (50C)	2223lm	2067lm					
			Narrow Beam 6W (NB6)	2700K (27C)	616lm	497lm	9° (09)			
				3000K (30C)	616lm	532lm				
4000K (40C)	665lm	574lm								
			5000K (50C)	714lm	616lm					
			Narrow Beam 8W (NB8)	2700K (27C)	792lm	639lm				
				3000K (30C)	792lm	684lm				
4000K (40C)	855lm	738lm								
			5000K (50C)	918lm	792lm					
			Zoom 6.4W (ZM6)	2700K (27C)	704lm	568lm	22°-50° (2250)			
				3000K (30C)	713lm	608lm				
4000K (40C)	760lm	656lm								
			5000K (50C)	736lm	704lm					
			Zoom 13W (ZM13)	2700K (27C)	1306lm	1098lm				
				3000K (30C)	1360lm	1150lm				
4000K (40C)	1435lm	1236lm								
			5000K (50C)	1453lm	1236lm					
				90 (90) 95 (95)		19° (19) 35° (35) 50° (50)				
				Warm Dimming 0.2-6W (WD6)	1800K-3000K (1830B)					636lm 518lm
1800K-3000K (1830B)	1246lm 1045lm	17° (17) 23° (23) 32° (32)								
			Warm Dimming 12W (WD12)							
			Tunable White 5.9W (TW6)	2700K-5000K (2750B)	585lm (both CCT's driven)				DALI (DL) Wireless*** (WL)	
Tunable White 11.5W (TW12)	2700K-5000K (2750B)	987lm (both CCT's driven)								

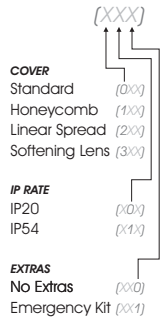

ACR.056
Honeycomb
(as extra)



ACR.057
Linear Spread
(as extra)



ACR.059
Softening Lens
(as extra)

* SANTI only available in round shape.

** Beam angle only for WASH version.

*** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: SANTI W-RD-ST18-30C-80-32-WH-DL-100

SANTI MINI


Name	Shape	Model	CCT	CRI80, CRI90 LED Source		Beam Angle	Luminaire Colour	Dimming Option	Accessories
				80 (80)	90 (90)				
SANTI MINI <i>(SANTI MINI)</i>	Round <i>(RD)</i>	Standard 3W <i>(ST3)</i>	2700K (27C)	396lm	320lm	27° (27)	White (WH)	Without Driver (00)	<p>COVER</p> <ul style="list-style-type: none"> Standard (0X) Honeycomb (1X) Linear Spread (2X) Softening Lens (3X) <p>IP RATE</p> <ul style="list-style-type: none"> IP20 (X0) IP54 (X1) <p>EXTRAS</p> <ul style="list-style-type: none"> No Extras (X0) Emergency Kit** (X1)
			3000K (30C)	396lm	342lm	35° (35)	Black (BL)	Non Dimmable (ND)	
SANTI MINI ADJ <i>(SANTI MINI A)</i>	Square <i>(SQ)</i>	Standard 4.3W <i>(ST4)</i>	4000K (40C)	428lm	369lm	47° (47)		Analogue (1-10V) (A1)	
			5000K (50C)	428lm	396lm			DIMX (DX)	
		Narrow Beam 4W <i>(NB4)</i>	2700K (27C)	528lm	426lm	13° (13)		Push Button (PB)	
			3000K (30C)	528lm	456lm			Phase Cut (PC)	
		4000K (40C)	570lm	492lm			Wireless* (WL)		
		5000K (50C)	570lm	528lm					


ACR.067
Honeycomb
(as extra)

ACR.066
Linear Spread
(as extra)

ACR.065
Softening Lens
(as extra)

* The wireless dimming option includes driver and Bluetooth dimming accessory.
 ** Emergency option and battery replacement accessibility of the emergency kit should be considered as the kit does not pass through the luminaire cutout.
 Emergency option can be applied to 2-5 luminaires depending on the driver.

Ordering Code Example: SANTI MINI-RD-ST4-30C-80-35-WH-DL-100

SANTI DEEP LL


Model	Outer Trim	Luminaire Colour:	Lamp Holder	Accessories
SANTI DEEP LL <i>(SANTI DEEP LL)</i>	Round (RD)	White/White (WW)	GU10 (max 7.5W) (G1)	<p>COVER</p> <ul style="list-style-type: none"> Standard (0X) Honeycomb (1X) Linear Spread (2X) Softening Lens (3X) <p>IP RATE</p> <ul style="list-style-type: none"> IP20 (X0) IP54 (X1)
	Square (SQ)	White/Black (WB)		
SANTI ADJ DEEP LL <i>(SANTI A DEEP LL)</i>		Black/Black (BB)		
		Black/White (BW)		
SANTI WASH DEEP LL <i>(SANTI W DEEP LL)</i>				


 Lamp
Not included

ACR.056
Honeycomb
(as extra)



ACR.057
Linear Spread
(as extra)

ACR.059
Softening Lens
(as extra)


Ordering Code Example:
SANTI A DEEP LL-RD-WW-G1-10

SANTI



SANTI

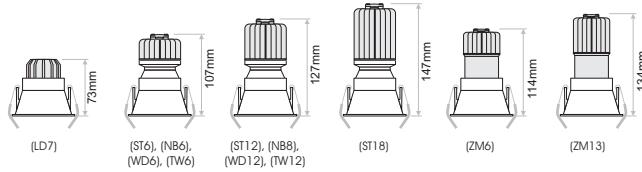


SANTI DEEP LL





SANTI ADJ

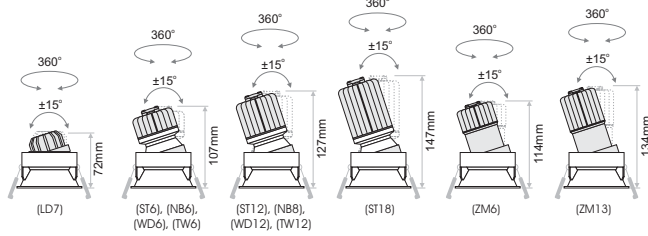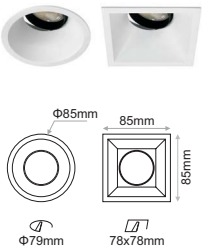


SANTI ADJ DEEP LL







SANTI WASH

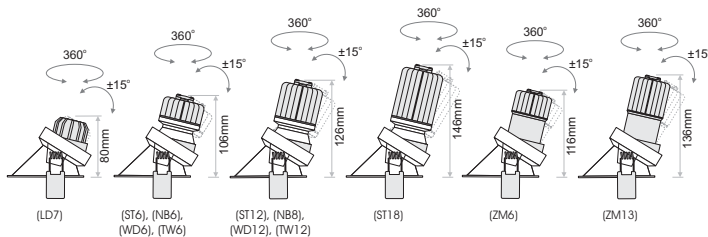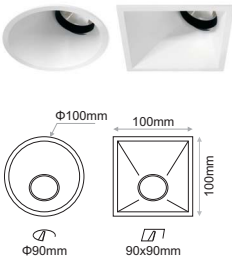

SANTI WASH DEEP LL






SANTI MINI







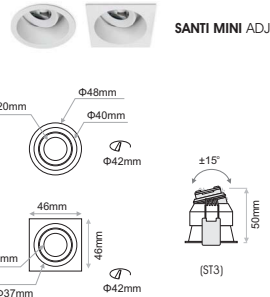

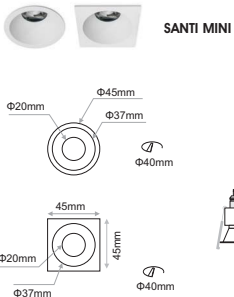


SANTI



LD7







ST6/ ST12/ ST18/ WD6 /WD12 /TW6 /TW12



NB6/ NB8






ZM6/ ZM13



SANTI MINI

ST3 / ST4



NB4

