



- SOUL is a series of recessed downlights.
- It is available either round or square.
- It is either fixed or adjustable depending on the model.
- It is available in standard or deep version offering extra visual comfort.
- Power consumption: varies from 3 to 18 watt.
- Beam angle: varies from 9 to 50 degrees.
- SOUL DEEP version is also available for LED lamps.
- Accessories available: honeycomb, linear spread lens, softening lens.
- Luminaire outer trim material: aluminium.
- Outer trim available in black or white as standard but custom colours also available upon request.
- 3 SDCM
- L90/B10 50000h
- Low UGR ensuring visual comfort (UGR<15 for DEEP version models).
- Selection of IP protection: either IP20 or IP54 (face only).
- Soul is also offered with an ingress protection rate IP65 (face only).
- Soul Mini: constant current 350mA @3W / 500mA @4.3W.

## SOUL



## SOUL MINI



SOUL



LD7, ST6, ST12, ST18, NB6, NB8, ZM6, ZM13

WD6, WD12, TW6, TW12


Name	Shape	Model	CCT	CRI80, CRI90 LED Source	Beam Angle	Luminaire Colour: Trim/Inner Case**	Dimming Option	Accessories	
				80 (80) 90 (90)					
SOUL (SOUL)	Round (RD)	Low Depth 7W (LD7)	2700K (27C)	930lm	762lm	30° (30)	White (WH) Black (BL) White/White (WW) White/Black (WB) Black/Black (BB) Black/White (BW)	Without Driver (00) Non Dimmable (ND) Analogue (1-10V) (A1) DMX (DX) DALI (DL) Push Button (PB) Phase Cut (PC) Wireless*** (WL)	
			3000K (30C)	960lm	792lm				
SOUL DEEP (SOUL DEEP)	Square (SQ)		4000K (40C)	1020lm	840lm	DEEP** 27° (27)			
			5000K (50C)	1020lm	840lm				
SOUL ADJ (SOUL A)		Standard 6.2W (ST6)	2700K (27C)	704lm	568lm	19° (19)			
			3000K (30C)	713lm	608lm	35° (35)			
SOUL ADJ DEEP (SOUL A DEEP)			4000K (40C)	760lm	656lm	50° (50)			
			5000K (50C)	736lm	704lm	DEEP** 16° (16)			
SOUL IP65 (SOUL 65)		Standard 12.2W (ST12)	2700K (27C)	1590lm	1380lm	30° (30)			
			3000K (30C)	1710lm	1485lm	45° (45)			
SOUL IP65 DEEP (SOUL 65 DEEP)			4000K (40C)	1830lm	1590lm	DEEP** 16° (16)			
			5000K (50C)	1710lm	1590lm	30° (30)			
		Standard 18W (ST18)	2700K (27C)	2067lm	1794lm	45° (45)			
			3000K (30C)	2223lm	1931lm	DEEP** 16° (16)			
			4000K (40C)	2379lm	2067lm	30° (30)			
			5000K (50C)	2223lm	2067lm	45° (45)			
		Narrow Beam 6W (NB6)	2700K (27C)	616lm	497lm	9° (09)			
			3000K (30C)	616lm	532lm				
			4000K (40C)	665lm	574lm				
			5000K (50C)	714lm	616lm				
		Narrow Beam 8W (NB8)	2700K (27C)	792lm	639lm				
			3000K (30C)	792lm	684lm				
			4000K (40C)	855lm	738lm				
			5000K (50C)	918lm	792lm				
		Zoom 6.4W (ZM6)	2700K (27C)	704lm	568lm	22°-50° (2250)			
			3000K (30C)	713lm	608lm				
			4000K (40C)	760lm	656lm				
			5000K (50C)	736lm	704lm				
		Zoom 13W (ZM13)	2700K (27C)	1306lm	1098lm				
			3000K (30C)	1360lm	1150lm				
			4000K (40C)	1435lm	1236lm				
			5000K (50C)	1453lm	1236lm				
		Warm Dimming 0.2-6W (WD6)	1800K-3000K (1830B)	636lm	518lm	19° (19)		Analogue (1-10V) (A1) DALI (DL) Phase Cut (PC) Wireless*** (WL)	
			35° (35)						
			50° (50)			DEEP** 16° (16)			
			DEEP** 30° (30)						
		Warm Dimming 12W (WD12)	1800K-3000K (1830B)	1246lm	1045lm	45° (45)			
			DEEP** 30° (30)						
		Tunable White 5.9W (TW6)	2700K-5000K (2750B)	585lm	(both CCT's driven)	DEEP** 16° (16)		DALI (DL) Wireless*** (WL)	
			DEEP** 30° (30)						
		Tunable White 11.5W (TW12)	2700K-5000K (2750B)	987lm	(both CCT's driven)	45° (45)			
			DEEP** 30° (30)						

\*Beam angle only for DEEP version.  
 \*\* Inner Case applicable only for DEEP versions.  
 \*\*\* The wireless dimming option includes driver and Bluetooth dimming accessory.  
 \*\*\*\* Applicable only for SOUL IP65/SOUL IP65 DEEP.

Ordering Code Example: SOUL DEEP-RD-ST18-30C-80-30-WW-DL-100



**SOUL MINI**

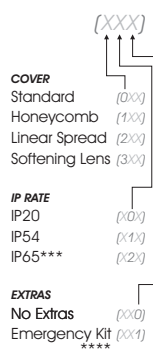
Name	Shape	Model	CCT	CRI80, CRI90 LED Source	Beam Angle	Luminaire Colour: Trim/Inner Case**	Dimming Option	Accessories
				80 (80) 90 (90)				
<b>SOUL MINI</b> <i>(SOUL MINI)</i>	Round <i>(RD)</i>	<b>Standard</b>	2700K <i>(27C)</i>	396lm 320lm	27° <i>(27)</i>	White <i>(WH)</i>	Without Driver <i>(00)</i>	 <p><b>COVER</b></p> <ul style="list-style-type: none"> <li>Standard <i>(00)</i></li> <li>Honeycomb <i>(10)</i></li> <li>Linear Spread <i>(20)</i></li> <li>Softening Lens <i>(30)</i></li> </ul> <p><b>IP RATE</b></p> <ul style="list-style-type: none"> <li>IP20 <i>(0)</i></li> <li>IP54 <i>(1)</i></li> <li>IP65*** <i>(2)</i></li> </ul> <p><b>EXTRAS</b></p> <ul style="list-style-type: none"> <li>No Extras <i>(00)</i></li> <li>Emergency Kit <i>(001)</i></li> </ul>
		<b>3W</b>	3000K <i>(30C)</i>	396lm 342lm	35° <i>(35)</i>	Black <i>(BL)</i>	Non Dimmable <i>(ND)</i>	
<b>SOUL MINI DEEP</b> <i>(SOUL MINI DEEP)</i>	Square <i>(SQ)</i>		4000K <i>(40C)</i>	428lm 369lm	47° <i>(47)</i>	White/White <i>(WW)</i>		
			5000K <i>(50C)</i>	428lm 396lm		White/Black <i>(WB)</i>		
		<b>Standard</b>	2700K <i>(27C)</i>	528lm 426lm	<b>DEEP*</b>	Black/Black <i>(BB)</i>		
<b>SOUL MINI ADJ</b> <i>(SOUL MINI A)</i>		<b>4.3W</b>	3000K <i>(30C)</i>	528lm 456lm	25° <i>(25)</i>	Black/White <i>(BW)</i>		
			4000K <i>(40C)</i>	570lm 492lm	30° <i>(30)</i>			
<b>SOUL MINI ADJ DEEP</b> <i>(SOUL MINI A DEEP)</i>			5000K <i>(50C)</i>	570lm 528lm	38° <i>(38)</i>			
		<b>Narrow</b>	2700K <i>(27C)</i>	440lm 380lm	13° <i>(13)</i>			
<b>SOUL MINI IP65</b> <i>(SOUL MINI 65)</i>		<b>Beam 4W</b>	3000K <i>(30C)</i>	475lm 410lm				
			4000K <i>(40C)</i>	510lm 410lm				
<b>SOUL MINI IP65 DEEP</b> <i>(SOUL MINI 65 DEEP)</i>			5000K <i>(50C)</i>	510lm 440lm				

\*Beam angle only for DEEP version.

\*\* Inner Case applicable only for DEEP versions.


\*\*\* Applicable only for SOUL IP65/SOUL IP65 DEEP

\*\*\*\* Emergency option and battery replacement accessibility of the emergency kit should be considered as the kit does not pass through the luminaire cutout. Emergency option can be applied to 2-5 luminaires depending on the driver.



Ordering Code Example: *SOUL MINI DEEP-RD-ST4-30C-80-38-WB-DL-100*

**SOUL DEEP LL**


Model	Outer Trim	Luminaire Colour:	Lamp Holder	Accessories
<b>SOUL DEEP LL</b> <i>(SOUL DEEP LL)</i>	Round <i>(RD)</i> Square <i>(SQ)</i>	White/White <i>(WW)</i> White/Black <i>(WB)</i> Black/Black <i>(BB)</i> Black/White <i>(BW)</i>	GU10 (max 7.5W) (G1)	 <p><b>COVER</b></p> <ul style="list-style-type: none"> <li>Standard <i>(0)</i></li> <li>Honeycomb <i>(1)</i></li> <li>Linear Spread <i>(2)</i></li> <li>Softening Lens <i>(3)</i></li> </ul> <p><b>IP RATE</b></p> <ul style="list-style-type: none"> <li>IP20 <i>(0)</i></li> <li>IP54 <i>(1)</i></li> <li>IP65* <i>(2)</i></li> </ul>
<b>SOUL ADJ DEEP LL</b> <i>(SOUL A DEEP LL)</i>				
<b>SOUL IP65 DEEP LL</b> <i>(SOUL 65 DEEP LL)</i>				



\* Applicable only for SOUL IP65 DEEP

Ordering Code Example: *SOUL A DEEP LL-RD-WW-G-1-10*




SOUL

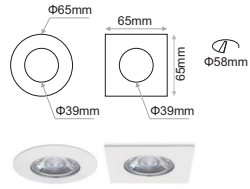

SOUL






SOUL DEEP

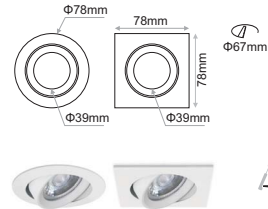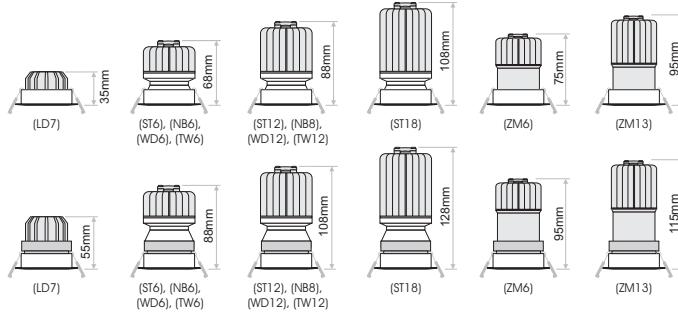

SOUL ADJ





SOUL ADJ DEEP

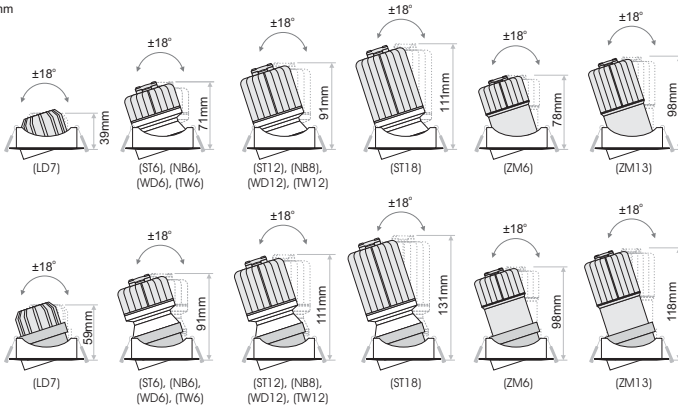


SOUL IP65



SOUL IP65 DEEP

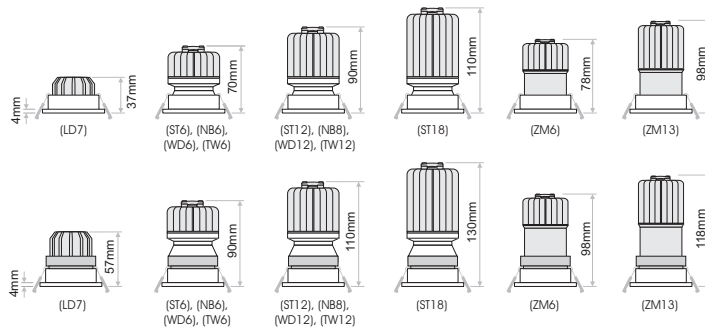


SOUL MINI




SOUL MINI





SOUL MINI DEEP



SOUL MINI ADJ

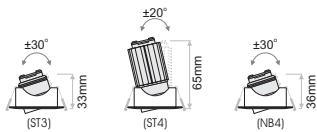


SOUL MINI ADJ DEEP

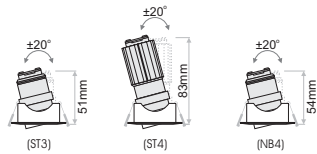

SOUL MINI IP65




SOUL MINI IP65 DEEP

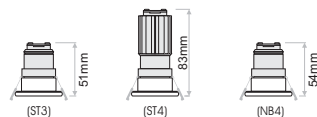


# SOUL

## LD7

SOUL / SOUL ADJ  
LOR 0.67 / 0.58  
30°




SOUL DEEP BL / SOUL ADJ DEEP WH  
LOR 0.46 / 0.49  
27°




## ST6/ ST12/ ST18/ WD6 /WD12 /TW6 /TW12


SOUL / SOUL ADJ  
LOR 0.79 / 0.71  
19°



LOR 0.87 / 0.77  
35°




LOR 0.83 / 0.80  
50°




SOUL DEEP BL / SOUL ADJ DEEP WH


LOR 0.62 / 0.51  
16°



LOR 0.53 / 0.57  
30°




LOR 0.68 / 0.63  
45°




## NB6 / NB8

SOUL / SOUL ADJ





SOUL DEEP BL / SOUL ADJ DEEP BL





## ZM6 / ZM13

SOUL / SOUL ADJ



SOUL DEEP BL / SOUL ADJ DEEP BL




# SOUL MINI


## ST3 / ST4

SOUL MINI / SOUL MINI ADJ


LOR 0.82 / 0.76  
27°



LOR 0.84 / 0.81  
35°




LOR 0.74 / 0.72  
47°




SOUL MINI DEEP BL / SOUL MINI ADJ DEEP WH

LOR 0.60 / 0.62  
25°



LOR 0.60 / 0.60  
30°



LOR 0.50/ 0.57  
38°

