

- TALUS Recessed downlight available in white or black colour.

Monochromatic, TW



- 3 SDCM
- L90/B10 50.000h

WD

- Dimmable options.
- 3 SDCM
- L90/B10 50.000h

RGBW

- White CCT at 4000K. (Other CCTs are available upon request).

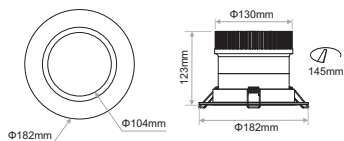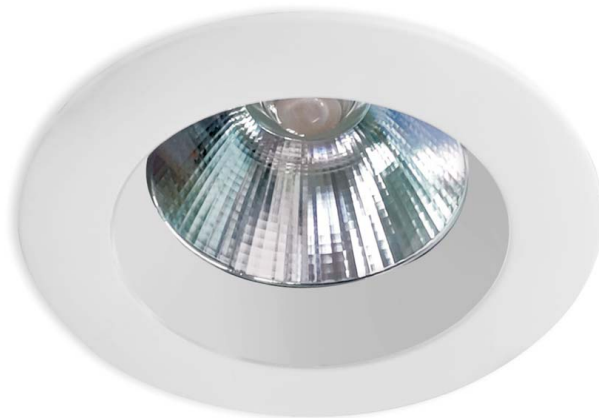

Monochromatic



RGBW

Model	LED Power	CCT*	LED Source			Type	CRI	Beam Angle	Colour	Dimming Option			
			CR180	CR190	CR197								
TALUS RC <i>(TALUS RC)</i>	23.9W <i>(24)</i>	2700K (27B)	3621lm	2987lm	2647lm	Fixed <i>(FX)</i>	80 (80)	20° (20)	White (WH) Black (BL)	Without Driver (00)			
		3000K (30B)	3847lm	3123lm	2829lm					90 (90)	35° (35)	Non Dimmable (ND)	
		4000K (40B)	3960lm	3304lm	-					97 (97)		60° (60)	Analogue (1-10V) (A1)
		5700K (57B)	3847lm	-	-								DMX (DX)
	31.3W <i>(31)</i>	2700K (27B)	4510lm	3721lm	3298lm		Phase Cut (PC)						
		3000K (30B)	4792lm	3890lm	3524lm		Push Button (PB)						
		4000K (40B)	4933lm	4115lm	-		Wireless*** (WL)						
		5700K (57B)	4792lm	-	-								
	37.1W <i>(37)</i>	2700K (27B)	5199lm	4289lm	3802lm								
		3000K (30B)	5524lm	4484lm	4062lm								
		4000K (40B)	5687lm	4744lm	-								
		5700K (57B)	5524lm	-	-								
Tunable White			CR190			90 (90)			Without Driver (00)				
23.9W <i>(24)</i>	Tunable White (TWB) 2700K~5700K	2252lm <i>(Both CCTs driven)</i>			DMX (DX)								
		3188lm <i>(Both CCTs driven)</i>							DALI (DL)				
34.8W <i>(35)</i>					Wireless*** (WL)								
Warm Dimmable			CR195			95 (95)			Without Driver (00)				
30.7W <i>(WD31)</i>	Warm Dimmable (1830B) 1800K~3000K	2840lm			Analogue (1-10V) (A1)								
					DMX (DX)								
									DALI (DL)				
									Phase Cut (PC)				
									Push Button (PB)				
									Wireless*** (WL)				
									Without Driver (00)				
29.5W <i>(30)</i>	RGBW** (RGBW)	2075lm			DMX (DX)								
		2695lm				DALI (DL)							
42.5W <i>(43)</i>					Wireless*** (WL)								

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.

** Other colour combinations available upon request.

*** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: TALUS RC31-30B-FX-90-60-BL-00

Warm dimming, 3000K to 1800K

