





- Whisper is a high aesthetically downlight.
- It is offered either recessed or trimless.
- It is available either round or square.
- WHISPER DEEP version is also available for GU10 LED lamps.
- Luminaire outer trim material: aluminium.
- 3 SDCM
- L90/B10 50000h
- Low UGR ensuring visual comfort (UGR<15).
- Selection of IP protection: either IP20 or IP54 (face only).





Name	Shape*	Model	CCT	CRI80, CRI90 LED Source	Beam Angle	Luminaire Colour:	Dimming Option	Accessories		
WHISPER TR <i>(WHISPER TR)</i>	Round <i>(RD)</i>	Low Depth 7W <i>(LD7)</i>	2700K (27C)	930lm	762lm	30° (30)	White (WH) Black (BL)	Without Driver (00) Non Dimmable (ND) Analogue (1-10V) (A1) DMX (DX) DALI (DL) Push Button (PB) Phase Cut (PC) Wireless** (WL)	<div style="text-align: right;">  <p>COVER</p> <p>Standard (0x0) Honeycomb (1x0) Linear Spread (2x0) Softening Lens (3x0)</p> <p>IP RATE</p> <p>IP20 (1x0) IP54 (1x1)</p> <p>EXTRAS</p> <p>No Extras (0x0) Emergency Kit (0x1)</p> </div>	
			3000K (30C)	960lm	792lm					
	Square <i>(SQ)</i>		4000K (40C)	1020lm	840lm	18° (18) 37° (37) 52° (52)				
			5000K (50C)	1020lm	840lm					
			Standard 6.2W <i>(ST6)</i>	2700K (27C)	704lm	568lm				
				3000K (30C)	713lm	608lm				
				4000K (40C)	760lm	656lm				
				5000K (50C)	736lm	704lm				
			Standard 12.2W <i>(ST12)</i>	2700K (27C)	1590lm	1380lm				
				3000K (30C)	1710lm	1485lm				
				4000K (40C)	1830lm	1590lm				
				5000K (50C)	1710lm	1590lm				
			Standard 18W <i>(ST18)</i>	2700K (27C)	2067lm	1794lm				
				3000K (30C)	2223lm	1931lm				
				4000K (40C)	2379lm	2067lm				
				5000K (50C)	2223lm	2067lm				
			Narrow Beam 6W <i>(NB6)</i>	2700K (27C)	616lm	497lm	9° (09)			
				3000K (30C)	616lm	532lm				
				4000K (40C)	665lm	574lm				
				5000K (50C)	714lm	616lm				
		Narrow Beam 8W <i>(NB8)</i>	2700K (27C)	792lm	639lm					
			3000K (30C)	792lm	684lm					
			4000K (40C)	855lm	738lm					
			5000K (50C)	918lm	792lm					
		Zoom 6.4W <i>(ZM6)</i>	2700K (27C)	704lm	568lm	22°-50° <i>(2250)</i>				
			3000K (30C)	713lm	608lm					
			4000K (40C)	760lm	656lm					
			5000K (50C)	736lm	704lm					
		Zoom 13W <i>(ZM13)</i>	2700K (27C)	1306lm	1098lm					
			3000K (30C)	1360lm	1150lm					
			4000K (40C)	1435lm	1236lm					
			5000K (50C)	1453lm	1236lm					
		Warm Dimming 0.2-6W <i>(WD6)</i>	90 (90) 95 (95)		18° (18) 37° (37) 52° (52)		Analogue (1-10V) (A1) DALI (DL) Phase Cut (PC) Wireless** (WL)			
			1800K-3000K <i>(1830B)</i>	636lm				518lm		
		Warm Dimming 12W <i>(WD12)</i>	90 (90) 95 (95)							
			1800K-3000K <i>(1830B)</i>	1246lm				1045lm		
		Tunable White 5.9W <i>(TW6)</i>	2700K-5000K <i>(2750B)</i>		585lm (both CCTs driven)		DALI (DL) Wireless** (WL)			
		Tunable White 11.5W <i>(TW12)</i>	2700K-5000K <i>(2750B)</i>		987lm (both CCTs driven)					



* WHISPER ADJ only available in round shape
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: WHISPER TR-RD-ST18-30C-80-37-WH-DL-100

WHISPER DEEP LL




Model	Shape	Luminaire Colour:	Lamp Holder	Accessories
WHISPER TR DEEP LL <i>(WHISPER TR DEEP LL)</i>	Round <i>(RD)</i> Square <i>(SQ)</i>	White <i>(WH)</i> Black <i>(BL)</i>	GU10 (max 7.5W) (G1)	<p><i>(XX)</i></p> <p>COVER</p> <p>Standard <i>(0x)</i></p> <p>Honeycomb <i>(1x)</i></p> <p>Linear Spread <i>(2x)</i></p> <p>Softening Lens <i>(3x)</i></p> <p>IP RATE</p> <p>IP20 <i>(x0)</i></p> <p>IP54 <i>(x1)</i></p>



Ordering Code Example:
WHISPER TR DEEP LL-RD-WW-G-1-10




LD7




ST6/ ST12/ ST18/ WD6 /WD12 /TW6 /TW12

WHISPER RD BL

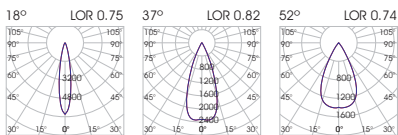


WHISPER SQ BL

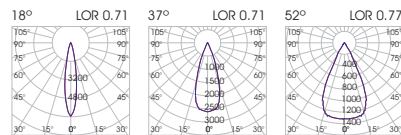


NB6/ NB8

WHISPER RD BL





ZM6/ ZM13


WHISPER RD BL

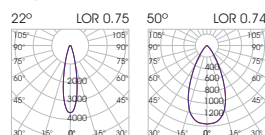



WHISPER TR Round

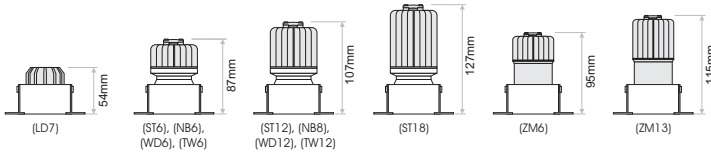

WHISPER TR DEEP Round



WHISPER TR Square

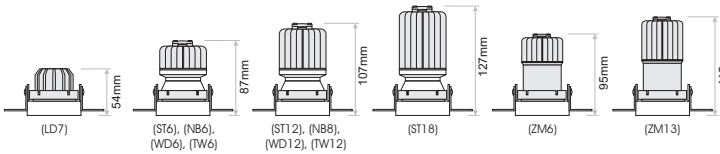

WHISPER TR DEEP Square

