


# SIDE EMITTING 120LED/m Monochromatic



Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth

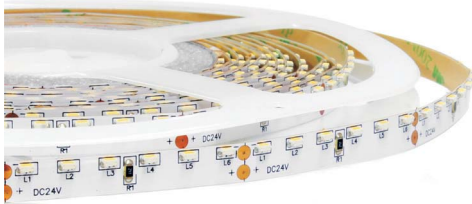

Code	No.LED/m	Watt/m	Reel(m)	CCT	Voltage	Beam Angle	✂ *(mm)	IP Rate
<b>TIV.149</b>	120	14.4W	5	2700K	24VDC	120°	50	IP20
<b>TIV.148</b>	120	14.4W	5	5000K	24VDC	120°	50	IP20

\* Please confirm the connection points on the modules.

