




Flexible LEDs

BASELINE TWIST MILKY LED

- Baseline TWIST Milky LED is a fully encapsulated, both Vertical & Horizontal bending flexible linear LED.
- Available in Pro or Standard Version.
- Material: Silicone
- Bin Step: Monochromatic White LEDs Silicone: 2SDCM
- L70B10 > 50000Hrs
- Available in IP67 protection rate.
- CRI > 90 for 2700/3000/3500/4000K
- Possibility to create straight or curved lines.
- Can be used both indoor and outdoor.
- Dot free lighting effect.
- IK 08 Protection.
- Can ideally be used with surface aluminium profile.



Max connection length:

- Monochromatic: 5 meters single supply


Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth

- ✓ UV Resistant
- ✓ Chemical Resistant




Connection IM IP67




Horizontal & Vertical bending

BASELINE TWIST must not be bent less than 200mm

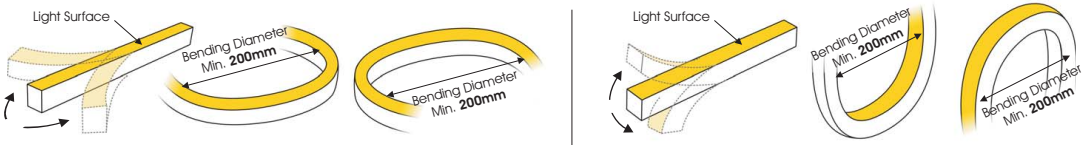




PRO

| Code | No.LED/m | Watt/m | Reel(m) | CCT | CRI | Luminus FLUX (lm/m) | Voltage | Beam Angle |  *(mm) |
|----------------|----------|--------|---------|-------|-----|---------------------|---------|------------|--|
| BSL.000 | 120 | 10W | 5 | 2700K | >90 | 610 | 24VDC | 120° | 50 |
| BSL.001 | 120 | 10W | 5 | 3000K | >90 | 618 | 24VDC | 120° | 50 |
| BSL.002 | 120 | 10W | 5 | 3500K | >90 | 630 | 24VDC | 120° | 50 |
| BSL.003 | 120 | 10W | 5 | 4000K | >90 | 650 | 24VDC | 120° | 50 |
| BSL.004 | 120 | 10W | 5 | 5000K | >80 | 660 | 24VDC | 120° | 50 |

* Please confirm with the >< sign on the rear side of the modules

Standard

| Code | No.LED/m | Watt/m | Reel(m) | CCT | CRI | Luminus FLUX (lm/m) | Voltage | Beam Angle |  *(mm) |
|----------------|----------|--------|---------|-------|-----|---------------------|---------|------------|--|
| BSL.005 | 120 | 10W | 5 | 2700K | >90 | 525 | 24VDC | 120° | 50 |
| BSL.006 | 120 | 10W | 5 | 3000K | >90 | 533 | 24VDC | 120° | 50 |
| BSL.007 | 120 | 10W | 5 | 3500K | >90 | 540 | 24VDC | 120° | 50 |
| BSL.008 | 120 | 10W | 5 | 4000K | >90 | 555 | 24VDC | 120° | 50 |
| BSL.009 | 120 | 10W | 5 | 5000K | >80 | 565 | 24VDC | 120° | 50 |

* Please confirm with the >< sign on the rear side of the modules







Connection IP67

Side Feed





| Code for Single Colour | Description | Length |
|------------------------|-------------------------|--------|
| BSL.301 | Side Feed BASELINE IP67 | L=0.3m |

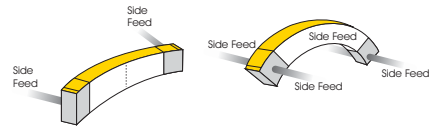

Bottom Feed





| Code for Single Colour | Description | Length |
|------------------------|---------------------------|--------|
| BSL.302 | Bottom Feed BASELINE IP67 | L=0.3m |



Front Feed



| Code for Single Colour | Description | Length |
|------------------------|--------------------------|--------|
| BSL.300 | Front Feed BASELINE IP67 | L=0.3m |

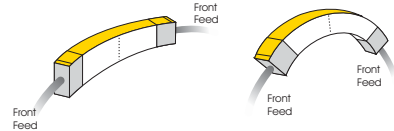

End Cap



| Code for Single Colour | Description | Length |
|------------------------|-----------------------|--------|
| BSL.303 | End Cap BASELINE IP67 | |



Accessories

| Code | Description | Length | |
|----------------|---|--------|--|
| PRF.421 | BASELINE Aluminium Profile | 2m | |
| PRF.190 | BASELINE Bendable Stainless Steel Profile 17.5x16.5mm | 0.5m | |
| PRH.088 | Mounting Clips stainless steel 316 for BASELINE TWIST MILKY LED | | |