


Box series of outdoor spotlights consists of a complete series of 5 different models in terms of consumption, available with accessories for different installations (plastic spike, concrete base, tree belt or pole base). Ideal for minimal architectural applications with low glare level due to the design of the luminaire and the extra snoot accessory. It is available in black or white colour as standard but custom RAL colours are also available upon request. Marine treatment is also offered upon request ensuring higher resistance to weather, UV, water and mould growth.

- Ingress Protection: IP66
- IK Rate: IK06
- Glare Rating: UGR <15.6 (17°), <13.9 (21°), <15.5 (28°), <23.3 (40°), <25.2 (63°), <17.7 (16°x30°)
- Dimming options: Phase Cut Dimmable, 24VDC or 48VDC PWM Dimmable.
- Power cable: H05RN-F 3x0.75mm<sup>2</sup> L=2.0m
- Outer cable diameter: 7mm<sup>2</sup>
- Weight: 0,50kg

## L90/B10 50.000h

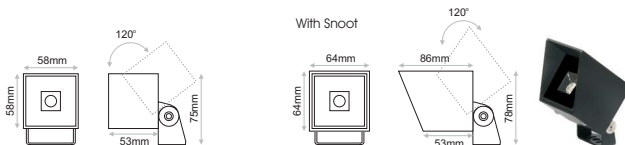


Tilt: 120°  
Rotate: 60°

Model	CCT	LED Source	Beam Angle	Colour	Dimming Option	Accessories
<b>BOX 4.4W</b> (BOX 5)	2700K (27C)	410lm	17°	(V/N) Black (BL)	230VAC Phase Cut Dimmable* (230D)	<b>cover</b> Standard (0x) SNOOT Black (1x) SNOOT White (2x) ↓ (XX) ↑ <b>extras</b> No Extras (x0) Spike (x1) Belt (x2) Pole Base** (x3) Concrete Base (x4)
	3000K (30C)	440lm	21°	(NR) White (WH)	24VDC PWM Dimmable (24D)	
	4000K (40C)	475lm	28°	(ND)	48VDC PWM Dimmable (48D)	
	6500K (65C)	510lm	40°	(WD)		
			63°	(VW)		
			16°x30°	(AS)		

\* By trailing edge dimmers.  
 \*\* Pole base supplied black as standard.

Ordering Code Example: BOX 5-30C-NR-BL-230D-01

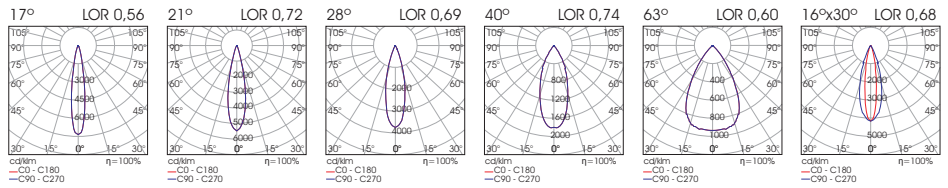

Accessories



ACR.001 Snoot Black  
 ACR.002 Snoot White





ACR.077 Belt S Accessory



ACR.003 Plastic Spike



ACR.028 Concrete base



ACR.111 Pole Base Black  
 ACR.W062 Pole Base White