


Conny series is a complete series of outdoor spotlights consisting of 6 different models in terms of consumption. The series is available with a variety of accessories (plastic spike, concrete base, tree belt or pole base). It blends into minimal landscape due to the aesthetic of the spot itself and due to the low glare achieved by the use of honeycomb and/or snoot. It is available in black or white colour as standard but custom RAL colours are also available upon request. Marine treatment is also offered upon request ensuring higher resistance to weather, UV, water and mould growth.

- Ingress Protection: IP66
- IK Rate: IK06
- Glare Rating CONNY 6: UGR <21.5 (16°), <18.8 (20°), <21.2 (30°), <21.6 (42°)
- Glare Rating CONNY 6 WD: UGR <17.6 (38°), <20.7 (54°)
- Dimming options: 24VDC Non-Dimmable or 24VDC PWM Dimmable.
- Power cable: H05RN-F 2x0.5mm² L=2.0m
- Outer cable diameter: 5mm²
- Weight: 0,28kg

L90/B10 50.000h






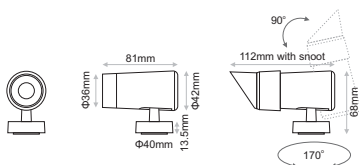


Model	CCT	CRI LED Source	Beam Angle	Colour	Voltage/Current	Accessories
CONNY 6W (CONNY 6)		80 (80)			Voltage	[XXXX] (0X0) (1X0) (2X0) (X00) (X10) (X01) (X02) (X03) (X04)
	2700K (27C)	550lm	16° (NR)	Black (BL)	24VDC Non-Dimmable (24)	
	3000K (30C)	550lm	20° (MD)	White (WH)	24VDC PWM Dimmable (24D)	
	4000K (40C)	642lm	30° (WD)			
	5000K (50C)	689lm	42° (WW)			
	Warm Dimmable	90 (90) 95 (95)			Current	
	Warm Dimming (WD)	627lm 552lm	38° (WD)		350mA (350)	
	1800K-3000K		54° (WW)			

* Pole base supplied black as standard.


Ordering Code Example: CONNY 6-30C-80-MD-BL-24-011

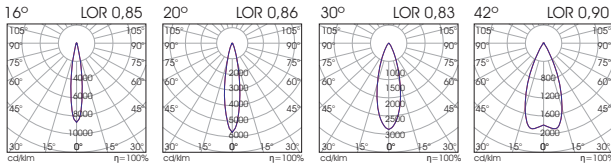

Accessories

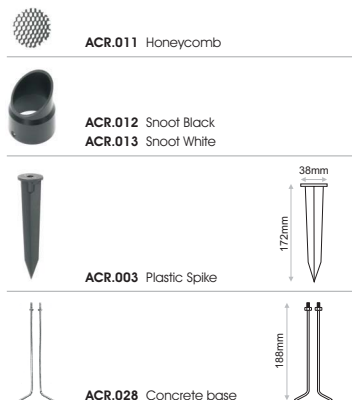

ACR.077 Belt S Accessory



ACR.111 Pole Base Black
ACRW062 Pole Base White