



- Crush is a downlight available either recessed or trimless.
- It is available in square or round form.
- Power consumption: varies from 6 to 18 watt.
- Beam angle: varies from 9 to 50 degrees.
- CRUSH is also available for GU10 LED lamps.
- Accessories available: honeycomb, linear spread lens, softening lens.
- Luminaire outer trim material: aluminium.
- Available in black or white as standard but custom colours also available upon request.
- 3 SDCM
- L90/B10 50000h
- Low UGR ensuring visual comfort (UGR < 15).
- Selection of IP protection: either IP20 or IP54 (face only).

TR



TR Double



RD



CRUSH




LD7, ST6, ST12, ST18, NB6, NB8, ZM6, ZM13



WD6, WD12, TW6, TW12



Name	Model Watt per LED	CCT	CR180, CR190 LED Source	Beam Angle	Luminaire Colour	Dimming Option	Accessories	
			80 (80) 90 (90)					
CRUSH TR (CRUSH TR)	Low Depth 7W (LD7)	2700K (27C)	930lm 762lm	30° (30)	White (WH) Black (BL)	Without Driver (00)		
		3000K (30C)	960lm 792lm			Non Dimmable (ND)		
		4000K (40C)	1020lm 840lm			Analogue (1-10V) (A1)		
CRUSH TR Double* (CRUSH TR DB)		5000K (50C)	1020lm 840lm			DMX (DX)		
						DALI (DL)		
						Push Button (PB)		
CRUSH TR Round (CRUSH TR RD)	Standard 6.2W (ST6)	2700K (27C)	704lm 568lm	19° (19)		Phase Cut (PC)		
		3000K (30C)	713lm 608lm	35° (35)		Wireless** (WL)		
		4000K (40C)	760lm 656lm	50° (50)				
		5000K (50C)	736lm 704lm					
	Standard 12.2W (ST12)	2700K (27C)	1590lm 1380lm					
		3000K (30C)	1710lm 1485lm					
		4000K (40C)	1830lm 1590lm					
		5000K (50C)	1710lm 1590lm					
	Standard 18W (ST18)	2700K (27C)	2067lm 1794lm					
		3000K (30C)	2223lm 1931lm					
		4000K (40C)	2379lm 2067lm					
		5000K (50C)	2223lm 2067lm					
Narrow Beam 6W (NB6)	2700K (27C)	616lm 497lm		9° (09)				
	3000K (30C)	616lm 532lm						
	4000K (40C)	665lm 574lm						
	5000K (50C)	714lm 616lm						
Narrow Beam 8W (NB8)	2700K (27C)	792lm 639lm						
	3000K (30C)	792lm 684lm						
	4000K (40C)	855lm 738lm						
	5000K (50C)	918lm 792lm						
Zoom 6.4W (ZM6)	2700K (27C)	704lm 568lm		22°~50° (2250)				
	3000K (30C)	713lm 608lm						
	4000K (40C)	760lm 656lm						
	5000K (50C)	736lm 704lm						
Zoom 13W (ZM13)	2700K (27C)	1306lm 1098lm						
	3000K (30C)	1360lm 1150lm						
	4000K (40C)	1435lm 1236lm						
	5000K (50C)	1453lm 1236lm						
Warm Dimming 0.2~6W (WD6)			90 (90) 95 (95)			Analogue (1-10V) (A1)		
	1800K-3000K (1830B)	636lm 518lm		19° (19) 35° (35) 50° (50)		DALI (DL)		
Warm Dimming 12W (WD12)						Phase Cut (PC)		
	1800K-3000K (1830B)	1246lm 1045lm				Wireless** (WL)		
Tunable White 5.9W (TW6)	2700K-5000K (2750B)	585lm				DALI (DL)		
		(both CCT's driven)				Wireless** (WL)		
Tunable White 11.5W (TW12)	2700K-5000K (2750B)	987lm						
		(both CCT's driven)						



ACR.054
Honeycomb
(as extra)



ACR.057
Linear Spread
(as extra)



ACR.059
Softening Lens
(as extra)

*CRUSH TR Double option example: CRUSH TR DB-ST12-30C-35-WH-00-000 will be with 2pcs from ST12 modules.

** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: CRUSH TR-ST18-30C-80-50-WH-DL-100




CRUSH LL




Model	Luminaire Colour:	Lamp Holder	Accessories
CRUSH TR LL <i>(CRUSH TR LL)</i>	White/White (WW) White/Black (WB) Black/Black (BB) Black/White (BW)	GU10 (max 7.5W) (G1)	(XX) ↑ COVER Standard (0x) Honeycomb (1x) Linear Spread (2x) Softening Lens (3x) IP RATE IP20 (10) IP54 (x1)
CRUSH TR Double LL <i>(CRUSH TR DB LL)</i>			
CRUSH TR Round LL <i>(CRUSH TR RD LL)</i>			



Ordering Code Example:
CRUSH TR LL-WW-G1-10

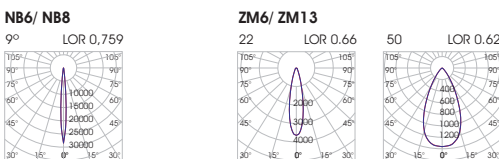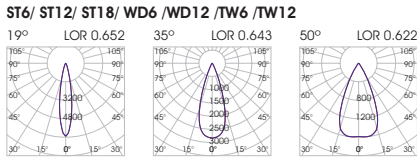



CRUSH TR




 92x92mm

CRUSH TR Double



 163x92mm

CRUSH TR RD



 $\Phi 85\text{mm}$

