



# ECLIPSE RC

(Recessed)

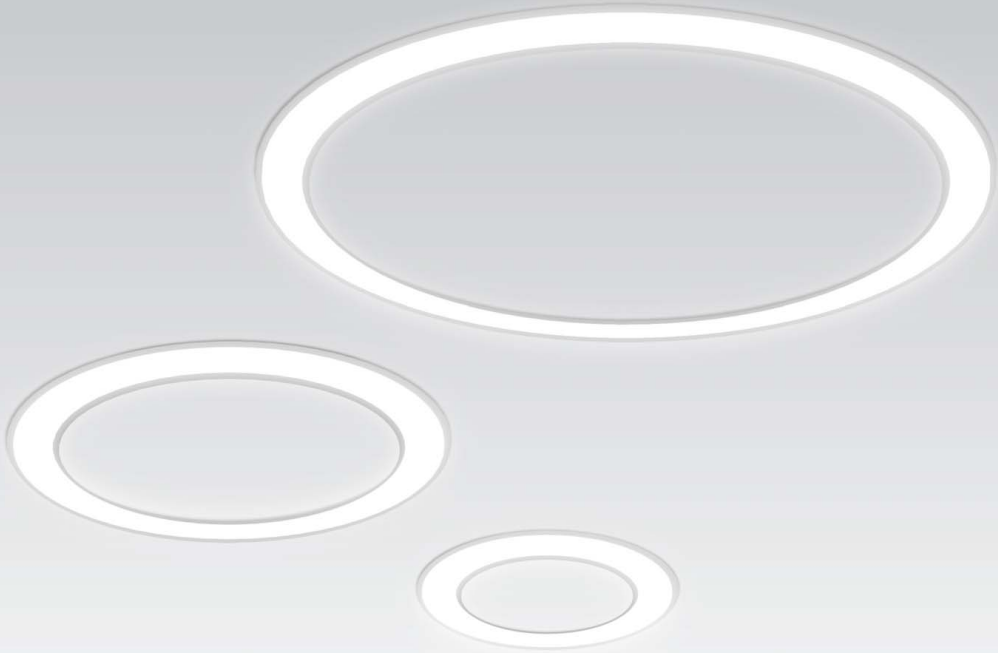

- ECLIPSE is a complete series of round luminaires available in surface, pendant, recessed and trimless application.
- It consists of two models: High Power and High Efficiency.
- It is offered with a Low Glare (UGR<20,8\*) as an option in the High Power model.
- It is offered with a Low UGR (UGR<18\*) as an option in the High Efficiency model.
- Luminaire material: Aluminium.
- Cover material: PMMA
- Powder Coated: Black (RAL9005), White (RAL9003), or Grey (RAL7037) as standard.
- Custom luminaire colours also available on request.
- Low tolerances for colour temperature (MacAdam 3).
- Lumen maintenance L80/B10 50.000h
- Emergency Function capability. (3 hours, with build-in rechargeable battery).
- Indoor Use: IP40





**LED source efficacy up to 195lm/W (4000K)**  
**Luminaire efficacy up to 119lm/W (4000K)**

**Available upon request:**

- ✓ Custom luminaire colours
- ✓ Emergency version

\*Glare Evaluation: X=4H / Y=8H, S=0,25H, Reflection factors: 70/50/20

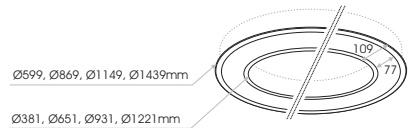





Model	Luminaire Colour*	CCT	Watt / Diameter	CRI** LED Source	CRI** LED Source	Type	Voltage	Dimming Option	Extras
<b>ECLIPSE Recessed High Power</b> <i>(ECLIPSE RC HP)</i>	White <i>(WH)</i>	3000K <i>(30)</i>	<b>HIGH POWER</b>	≥ 80 (80) <b>3000K</b>	≥ 80 (80) <b>4000K</b>	Opal <i>(OP)</i>	230VAC <i>(230)</i>	Non Dimmable <i>(ND)</i>	<b>Function</b> Standard <i>(0)</i> Emergency <i>(1)</i>
	Black <i>(BL)</i>	4000K <i>(40)</i>	46.2W / 58cm <i>(46W058)</i>	6910lm	7310lm	Low Glare <i>(LG)</i> ***	Analogue <i>(A1)</i> (1-10V)		
	Grey <i>(GR)</i>	75W / 85cm <i>(75W085)</i>	11070lm	11740lm	DALI <i>(DL)</i>				
	104.5W / 113cm <i>(105W113)</i>	15490lm	16390lm	Wireless <i>(WL)</i>					
<b>ECLIPSE Recessed High Efficiency</b> <i>(ECLIPSE RC HE)</i>			<b>HIGH EFFICIENCY</b>	≥ 80 (80) <b>3000K</b>	≥ 80 (80) <b>4000K</b>	Opal <i>(OP)</i>			
			17.6W / 58cm <i>(18W058)</i>	2940lm	3110lm	Low UGR <i>(LU)</i> ***			
			26.7W / 85cm <i>(27W085)</i>	4450lm	4720lm				
			37.2W / 113cm <i>(37W113)</i>	6230lm	6590lm				
		47.8W / 142cm <i>(48W142)</i>	8020lm	8480lm					

- \* Custom luminaire colours available upon request.
- \*\* Available in CRI90 upon request.
- \*\*\* Low Glare (UGR<20,8), Low UGR (UGR<18)

Ordering Code Example: ECLIPSE RC HP-BL-30-105W113-80-LG-230-ND-0





Ø599mm

Ø869mm

Ø1149mm

Ø1439mm

**ECLIPSE Recessed**

HIGH POWER  
HIGH EFFICIENCY

46W  
18W

75W  
27W

105W  
37W

134W  
48W

**Weight**



3.63Kgs

5.48Kgs

7.42Kgs

10Kgs

**HIGH POWER**



**HIGH EFFICIENCY**

