



- ECLIPSE is a complete series of round luminaires available for surface, pendant, recessed and trimless application.
- The surface version is offered either with Direct illumination combined with a decorative Indirect lighting effect (ECLIPSE SF DECO) or with only Direct illumination (ECLIPSE SF).
- It consists of two models: High Power and High Efficiency.
- It is offered with a Low Glare (UGR<20.8*) as an option in the High Power model.
- It is offered with a Low UGR (UGR<18*) as an option in the High Efficiency model.
- Luminaire material: Aluminium.
- Cover material: PMMA
- Powder Coated: Black (RAL9005), White (RAL9003), or Grey (RAL7037) as standard.
- Custom luminaire colours also available on request.
- Low tolerances for colour temperature (MacAdam 3).
- Lumen maintenance L80/B10 50.000h
- Emergency Function capability. (3 hours, with build-in rechargeable battery).
- Indoor Use: IP40




LED source efficacy up to 195lm/W (4000K)

Luminaire efficacy up to 119lm/W (4000K)

Available upon request:

- ✓ Custom luminaire colours
- ✓ Emergency version

*Glare Evaluation: X=4H / Y=8H, S=0,25H, Reflection factors: 70/50/20

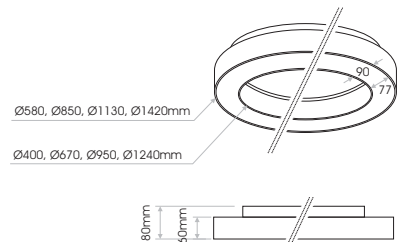







Model	Luminaire Colour*	CCT	Watt / Diameter	CRI** LED Source	CRI** LED Source	Type	Voltage	Dimming Option	Extras
ECLIPSE SF DECO High Power <i>(ECLIPSE SF DECO HP)</i>	White <i>(WH)</i>	3000K <i>(30)</i>	HIGH POWER	≥ 80 <i>(80)</i> 3000K	≥ 80 <i>(80)</i> 4000K	Opal <i>(OP)</i>	230VAC <i>(230)</i>	Non Dimmable <i>(ND)</i>	Function Standard <i>(0)</i> Emergency <i>(1)</i>
	Black <i>(BL)</i>	4000K <i>(40)</i>	46.2W / 58cm <i>(46W058)</i>	6910lm	7310lm	Low Glare <i>(LG)***</i>	Analogue <i>(A1)</i> (1-10V)		
	Grey <i>(GR)</i>		75W / 85cm <i>(75W085)</i>	11070lm	11740lm		DALI <i>(DL)</i>		
		104.5W / 113cm <i>(105W113)</i>	15490lm	16390lm	Wireless <i>(WL)</i>				
ECLIPSE SF DECO High Efficiency <i>(ECLIPSE SF DECO HE)</i>			HIGH EFFICIENCY	≥ 80 <i>(80)</i> 3000K	≥ 80 <i>(80)</i> 4000K	Opal <i>(OP)</i>			
			17.6W / 58cm <i>(18W058)</i>	2940lm	3110lm	Low UGR <i>(LU)***</i>			
			26.7W / 85cm <i>(27W085)</i>	4450lm	4720lm				
			37.2W / 113cm <i>(37W113)</i>	6230lm	6590lm				
		47.8W / 142cm <i>(48W142)</i>	8020lm	8480lm					

- * Custom luminaire colours available upon request.
- ** Available in CRI90 upon request.
- *** Low Glare (UGR<20.8), Low UGR (UGR<18)

Ordering Code Example: ECLIPSE SF DECO HP-BL-30-105W113-80-LG-230-ND-0

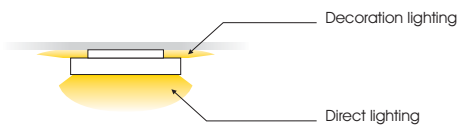

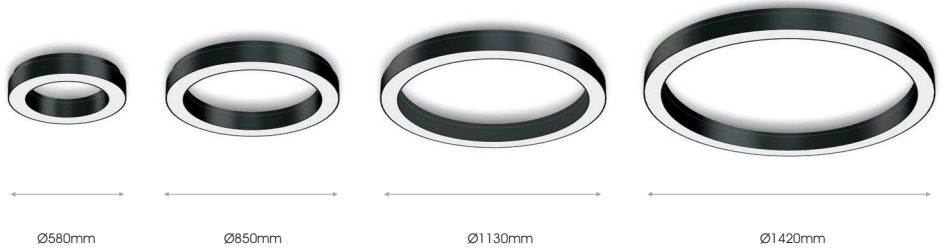

ECLIPSE SF DECO

HIGH POWER
HIGH EFFICIENCY

46W 18W	75W 27W	105W 37W	134W 48W
------------	------------	-------------	-------------


Weight	3.63Kgs	5.48Kgs	7.42Kgs	10Kgs
---------------	---------	---------	---------	-------

Optional accessories



- PRH.111** Metal drilling Template for ECLIPSE SF DECO Ø58cm
- PRH.112** Metal drilling Template for ECLIPSE SF DECO Ø85cm
- PRH.113** Metal drilling Template for ECLIPSE SF DECO Ø113cm
- PRH.114** Metal drilling Template for ECLIPSE SF DECO Ø142cm

HIGH POWER



HIGH EFFICIENCY

