

# ECLIPSE SF

(Surface)



- ECLIPSE is a complete series of round luminaires available for surface, pendant, recessed and trimless application.
- The surface version is offered either with Direct illumination (ECLIPSE SF) or with Direct illumination combined with a decorative Indirect lighting effect (ECLIPSE SF DECO).
- It consists of two models: High Power and High Efficiency.
- It is offered with a Low Glare (UGR<20.8\*) as an option in the High Power model.
- It is offered with a Low UGR (UGR<18\*) as an option in the High Efficiency model.
- Luminaire material: Aluminium.
- Cover material: PMMA
- Powder Coated: Black (RAL9005), White (RAL9003), or Grey (RAL7037) as standard.
- Custom luminaire colours also available on request.
- Low tolerances for colour temperature (MacAdam 3).
- Lumen maintenance L80/B10 50.000h
- Emergency Function capability. (3 hours, with build-in rechargeable battery).
- Indoor Use: IP40




**LED source efficacy up to 195lm/W (4000K)**  
**Luminaire efficacy up to 119lm/W (4000K)**

**Available upon request:**

- ✓ Custom luminaire colours
- ✓ Emergency version

\*Glare Evaluation: X=4H / Y=8H, S=0,25H, Reflection factors: 70/50/20

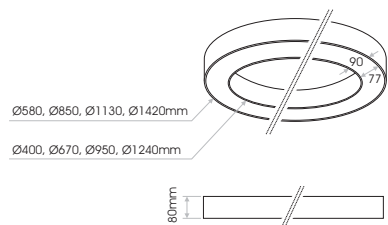





Model	Luminaire Colour*	CCT	Watt / Diameter	CRI** LED Source	CRI** LED Source	Type	Voltage	Dimming Option	Extras
<b>ECLIPSE Surface High Power</b> <i>(ECLIPSE SF HP)</i>	White <i>(WH)</i>	3000K <i>(30)</i>	<b>HIGH POWER</b>	≥ 80 <i>(80)</i> <b>3000K</b>	≥ 80 <i>(80)</i> <b>4000K</b>	Opal <i>(OP)</i>	230VAC <i>(230)</i>	Non Dimmable <i>(ND)</i>	<b>Function</b> Standard <i>(0)</i> Emergency <i>(1)</i>
	Black <i>(BL)</i>	4000K <i>(40)</i>	46.2W / 58cm <i>(46W058)</i>	6910lm	7310lm	Low Glare <i>(LG)</i> ***	Analogue <i>(A1)</i> (1-10V)		
	Grey <i>(GR)</i>	75W / 85cm <i>(75W085)</i>	11070lm	11740lm	DALI <i>(DL)</i>				
		104.5W / 113cm <i>(105W113)</i>	15490lm	16390lm	Wireless <i>(WL)</i>				
<b>ECLIPSE Surface High Efficiency</b> <i>(ECLIPSE SF HE)</i>			<b>HIGH EFFICIENCY</b>	≥ 80 <i>(80)</i> <b>3000K</b>	≥ 80 <i>(80)</i> <b>4000K</b>	Opal <i>(OP)</i>			
			17.6W / 58cm <i>(18W058)</i>	2940lm	3110lm	Low UGR <i>(LU)</i> ***			
			26.7W / 85cm <i>(27W085)</i>	4450lm	4720lm				
			37.2W / 113cm <i>(37W113)</i>	6230lm	6590lm				
			47.8W / 142cm <i>(48W142)</i>	8020lm	8480lm				

- \* Custom luminaire colours available upon request.
- \*\* Available in CRI90 upon request.
- \*\*\* Low Glare (UGR<20.8), Low UGR (UGR<18)

Ordering Code Example: ECLIPSE SF HP-BL-30-105W113-80-LG-230-ND-0





**ECLIPSE Surface**

HIGH POWER  
HIGH EFFICIENCY


	Ø580mm	Ø850mm	Ø1130mm	Ø1420mm
<b>ECLIPSE Surface</b>				
HIGH POWER	46W	75W	105W	134W
HIGH EFFICIENCY	18W	27W	37W	48W
<b>Weight</b>	3.63Kgs	5.48Kgs	7.42Kgs	10Kgs

**Optional accessories**



- PRH.111** Metal drilling Template for ECLIPSE SF Ø58cm
- PRH.112** Metal drilling Template for ECLIPSE SF Ø85cm
- PRH.113** Metal drilling Template for ECLIPSE SF Ø113cm
- PRH.114** Metal drilling Template for ECLIPSE SF Ø142cm

**HIGH POWER**



**HIGH EFFICIENCY**

