


# ECLIPSE TR

(Trimless)



- ECLIPSE is a complete series of round luminaires available for surface, pendant, recessed and trimless application.
- The trimless version offers an elegant aesthetically solution for small and large scale projects.
- It consists of two models: High Power and High Efficiency.
- It is offered with a Low Glare (UGR<20,8\*) as an option in the High Power model.
- It is offered with a Low UGR (UGR<18\*) as an option in the High Efficiency model.
- Luminaire material: Aluminium.
- Cover material: PMMA
- Powder Coated: White (RAL9003)
- Custom luminaire colours also available on request.
- Low tolerances for colour temperature (MacAdam 3).
- Lumen maintenance L80/B10 50.000h
- Emergency Function capability. (3 hours, with build-in rechargeable battery).
- Indoor Use: IP40

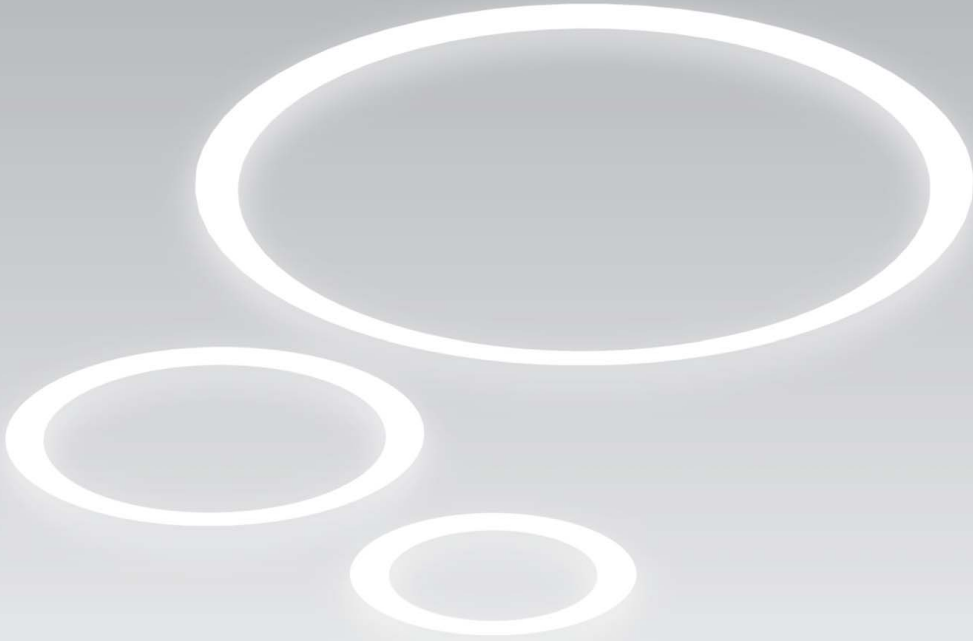


**LED source efficacy up to 195lm/W (4000K)**  
**Luminaire efficacy up to 119lm/W (4000K)**


**Available upon request:**

- ✓ Custom luminaire colours
- ✓ Emergency version

\*Glare Evaluation: X=4H / Y=8H, S=0,25H, Reflection factors: 70/50/20

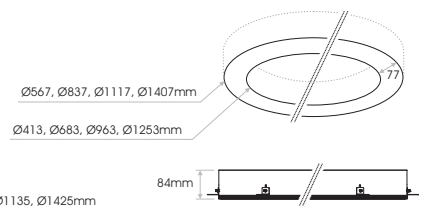

 Cutting Hole:  
 $\varnothing 585$ ,  $\varnothing 855$ ,  $\varnothing 1135$ ,  $\varnothing 1425$ mm

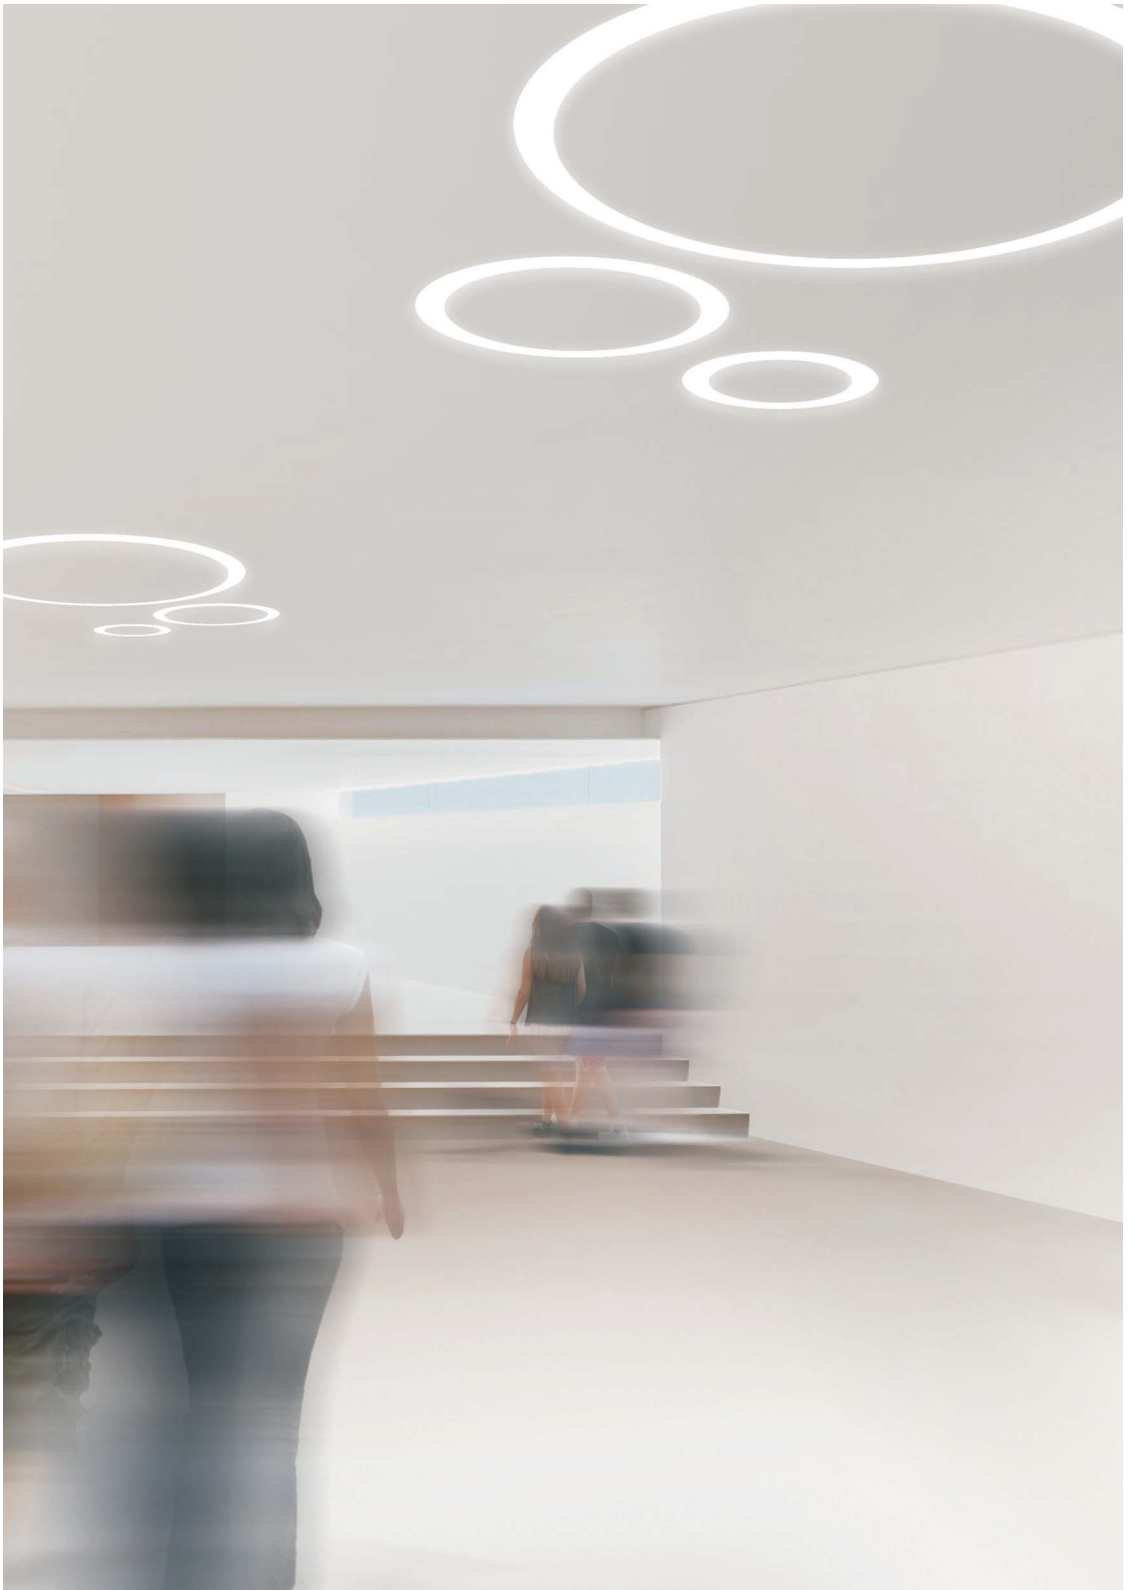




Model	Luminaire Colour	CCT	Watt / Diameter	CRI* LED Source	CRI* LED Source	Type	Voltage	Dimming Option	Extras
<b>ECLIPSE Trimless High Power</b> <i>(ECLIPSE TR HP)</i>	White <i>(WH)</i>	3000K <i>(30)</i>	<b>HIGH POWER</b>	≥ 80 <i>(80)</i> <b>3000K</b>	≥ 80 <i>(80)</i> <b>4000K</b>	Opal <i>(OP)</i>	230VAC <i>(230)</i>	Non Dimmable <i>(ND)</i>	<b>Function</b> Standard <i>(0)</i> Emergency <i>(1)</i>
		4000K <i>(40)</i>	46.2W / 58cm <i>(46W058)</i>	6910lm	7310lm	Low Glare <i>(LG)**</i>		Analogue <i>(A1)</i> (1-10V)	
		75W / 85cm <i>(75W085)</i>	11070lm	11740lm		DALI <i>(DL)</i>			
		104.5W / 113cm <i>(105W113)</i>	15490lm	16390lm		Wireless <i>(WL)</i>			
<b>ECLIPSE Trimless High Efficiency</b> <i>(ECLIPSE TR HE)</i>	White <i>(WH)</i>		<b>HIGH EFFICIENCY</b>	≥ 80 <i>(80)</i> <b>3000K</b>	≥ 80 <i>(80)</i> <b>4000K</b>	Opal <i>(OP)</i>	230VAC <i>(230)</i>	Non Dimmable <i>(ND)</i>	<b>Function</b> Standard <i>(0)</i> Emergency <i>(1)</i>
			17.6W / 58cm <i>(18W058)</i>	2940lm	3110lm	Low UGR <i>(LU)**</i>			
			26.7W / 85cm <i>(27W085)</i>	4450lm	4720lm				
			37.2W / 113cm <i>(37W113)</i>	6230lm	6590lm				
		47.8W / 142cm <i>(48W142)</i>	8020lm	8480lm					

\* Available in CRI90 upon request.

\*\* Low Glare (UGR<20,8), Low UGR (UGR<18)

Ordering Code Example: ECLIPSE TR HE-WH-30-48W142-80-LU-230-ND-0



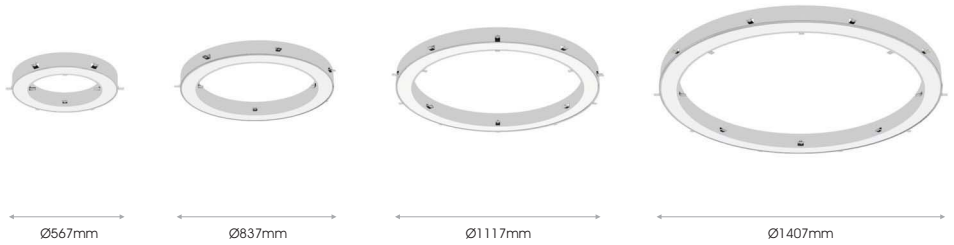

**ECLIPSE Trimless**


HIGH POWER  
HIGH EFFICIENCY

46W 18W	75W 27W	105W 37W	134W 48W
------------	------------	-------------	-------------

**Weight**

3.63Kgs	5.48Kgs	7.42Kgs	10Kgs
---------	---------	---------	-------

**HIGH POWER**

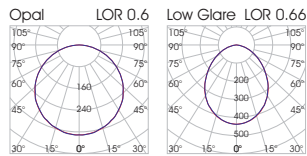

**HIGH EFFICIENCY**

