



ELEGANT MINI

Elegant MINI is the slimmest and lower range in wattage model of Elegant series, ideal for outdoor and indoor architectural applications. It is unique for wall washing due to the different wall bracket lengths and the maintenance of the pitch between the luminaires. It ensures the highest glare control through antiglare accessory offered as extra. It can also be offered (besides the input cable with IP68 connector offered as standard) with an extra output cable with IP68 connector (except 25-30cm offered in extra version only). It is available upon request in different RAL colours.

L80/B10 50.000h
for monochromatic models


L90/B10 50.000h
for RGB, R, G, B models

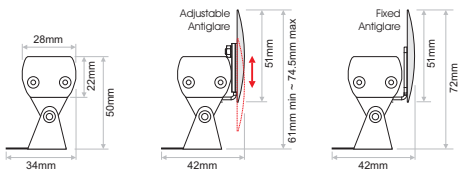


ELEGANT MINI



ELEGANT MINI 25cm & 30cm



ELEGANT MINI 25cm & 30cm



Chain connection with input-output cables
(for 25/30cm only in standard version)



Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth

Technical features:

Installation:	Surface mounted, Wall mounted
LED light source:	High power CREE LEDs
Optics:	Monochrome, Tunable White (1in1), RGB (1in1): 14°, 27°, 49°, 40°x13° (25 & 30cm only available in monochromatic),
Lengths:	25cm, 30cm, 50cm, 60cm, 100cm, 120cm
No. of LEDs 100, 120cm / 50, 60cm:	24 leds / 12 leds
No. of LEDs 25cm & 30cm:	6 leds
Pitch for 25cm, 50cm, 100cm:	41.65 mm (Pitch is maintained between luminaries)
Pitch for 30cm, 60cm, 120cm:	50 mm (Pitch is maintained between luminaries)
Power supply:	Constant voltage 24VDC
Power:	25cm, 30cm: 6.5W / 50cm, 60cm: 13W / 100cm, 120cm: 26W
Ingress protection:	IP66
Operation Ambient temperature:	-25°C to +50°C.
Weight 25/30/50/60/100/120cm:	0,27 / 0,35 / 0,532 / 0,680 / 0,970 / 1,120kgs (standard models)

Materials:

Main body:	Natural anodized anticorrosal aluminium EN AW-6060.
Protective cover:	3mm tempered Low-Iron glass.
Finishes (End caps):	Anticorrosal die cast aluminium alloy AS12 with 2 anti-corrosion powder coatings (primer & polyester).
Mounting brackets:	Natural anodized Anticorrosal aluminium EN AW-6060 with INOX-304 metal parts.
Optics:	PMMA collimating lens.
Gaskets:	Silicone rubber.
Connector:	Nylon 66. Fire resistance V-0 (only for standard version, not ECO).
Pressure equalization:	Screw Vent (Breather) 190ml/min@0,07bar.
Cable gland:	Nickeled brass. IP68.
Printed circuit:	Insulated metal substrate PCB.
Power cords:	50cm, suitable for outdoor use, halogen-free good chemical resistance, cold resistant, UV-resistant, temperature range for fixed installation -50oC to +80oC.
Screws:	Stainless steel.

Accessories Materials:

Ground brackets:	INOX-316 metal parts.
Wall brackets:	INOX-316 metal parts.
Antiflare:	Natural anodized Anticorrosal aluminium EN AW-6060 with INOX-316 metal parts.

Marine Type features:

Powder Coating:	Ultra-durable powder coating that meets the requirements of GSB Master, Qualicoat Class2, EN12206 (formerly BS6496), En13438 (formerly BS6497:1984) and AAMA 2604.
Exterior Durability:	Meets qualicoat class 2 requirements after 3 years Florida Meets AAMA 2604-13 requirements after 5 years Florida
High Resistance to:	Weather, UV, Water and mould growth



Model	Luminaire Colour**	CCT*** - CRI	6.5W			13W			26W			Beam Angle	Watt / Length***	Voltage
			LED Source	LED Source	LED Source	LED Source	LED Source	LED Source	LED Source					
ELEGANT MINI <small>(ELEGANT MINI)</small>	Anodized <small>(AN)</small>	2700K - 80CRI <small>[2780]</small>	510lm	1030lm	2060lm	14° <small>(14)</small>	6.5W / 25cm <small>(07W025)</small>	24VDC <small>(24)</small>						
	Marine Type <small>(MT)</small>	2700K - 90CRI <small>[2790]</small>	390lm	770lm	1550lm	27° <small>(27)</small>	6.5W / 30cm <small>(07W030)</small>							
		3000K - 80CRI <small>[3080]</small>	550lm	1090lm	2190lm	49° <small>(49)</small>	13W / 50cm <small>(13W050)</small>							
	3000K - 90CRI <small>[3090]</small>	420lm	840lm	1680lm	13°x40° <small>(40)</small>	13W / 60cm <small>(13W060)</small>								
	4000K - 80CRI <small>[4080]</small>	550lm	1090lm	2190lm		26W / 100cm <small>(26W100)</small>								
	6500K - 70CRI <small>[6570]</small>	624lm	1250lm	1250lm	26W / 120cm <small>(26W120)</small>									
	Tunable WC 1in1 <small>[WC1*]</small>	-	1140lm	2280lm										
	Tunable WNC 1in1 <small>[WNC1*]</small>	-	1260lm	2530lm										
	Red <small>[RD]</small>	340lm	680lm	1360lm										
	Green <small>[GR]</small>	770lm	1530lm	3070lm										
	Blue <small>[BL]</small>	220lm	440lm	880lm										
	Amber <small>[AM]</small>	420lm	840lm	1680lm										
	RGB 1in1 <small>[RGB1]</small>	-	650lm	1290lm										

ECO

Model	Luminaire Colour**	CCT*** - CRI	6.5W			13W			26W			Beam Angle	Watt / Length***	Voltage
			LED Source	LED Source	LED Source	LED Source	LED Source	LED Source	LED Source					
ELEGANT MINI ECO <small>(ELEGANT MINI ECO)</small>	Anodized <small>(AN)</small>	2700K - 80CRI <small>[2780]</small>	510lm	1030lm	2060lm	12° <small>(12)</small>	6.5W / 25cm <small>(07W025)</small>	24VDC <small>(24)</small>						
	Marine Type <small>(MT)</small>	2700K - 90CRI <small>[2790]</small>	390lm	770lm	1550lm	30° <small>(30)</small>	6.5W / 30cm <small>(07W030)</small>							
		3000K - 80CRI <small>[3080]</small>	550lm	1090lm	2190lm	45° <small>(45)</small>	13W / 50cm <small>(13W050)</small>							
	3000K - 90CRI <small>[3090]</small>	420lm	840lm	1680lm	25°x50° <small>(50)</small>	13W / 60cm <small>(13W060)</small>								
	4000K - 80CRI <small>[4080]</small>	550lm	1090lm	2190lm		26W / 100cm <small>(26W100)</small>								
	6500K - 70CRI <small>[6570]</small>	624lm	1250lm	1250lm	26W / 120cm <small>(26W120)</small>									
	Tunable WC 1in1 <small>[WC1*]</small>	-	1140lm	2280lm										
	Tunable WNC 1in1 <small>[WNC1*]</small>	-	1260lm	2530lm										
	Red <small>[RD]</small>	340lm	680lm	1360lm										
	Green <small>[GR]</small>	770lm	1530lm	3070lm										
	Blue <small>[BL]</small>	220lm	440lm	880lm										
	Amber <small>[AM]</small>	420lm	840lm	1680lm										
	RGB 1in1 <small>[RGB1]</small>	-	650lm	1290lm										


*WC1: Tunable 2700K-6500K 1in1

** Available in RAL colours upon request

*WNC1: Tunable 2700K-4000K-6500K 1in1

*** 25cm & 30cm only available monochromatic

Ordering Code Example: ELEGANT MINI-AN-6570-14-13W060-24

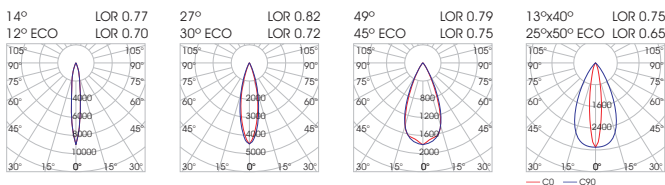

Ground brackets

Ground bracket INOX-304



INOX-304
(as standard for 50/60/100/120cm)



INOX-304
(as standard for 25/30cm)

Ground bracket INOX-316



INOX-316
(as extra for 50/60/100/120cm)



INOX-316
(as extra for 25/30cm)

(RAL colours as extra upon request)



Antiglare

Adjustable Antiglare
accessory (as extra)

ELG.113 25cm Anodized
ELGW113 25cm White RAL9003 mat
ELGB113 25cm Black RAL 9005 mat

ELG.037 30cm Anodized
ELGW037 30cm White RAL9003 mat
ELGB037 30cm Black RAL 9005 mat

ELG.019 50cm Anodized
ELGW019 50cm White RAL9003 mat
ELGB019 50cm Black RAL 9005 mat

ELG.020 60cm Anodized
ELGW020 60cm White RAL9003 mat
ELGB020 60cm Black RAL 9005 mat

ELG.021 100cm Anodized
ELGW021 100cm White RAL9003 mat
ELGB021 100cm Black RAL 9005 mat

ELG.022 120cm Anodized
ELGW022 120cm White RAL9003 mat
ELGB022 120cm Black RAL 9005 mat

Fixed Antiglare
accessory (as extra)

ELG.114 25cm Anodized
ELGW114 25cm White RAL9003 mat
ELGB114 25cm Black RAL 9005 mat

ELG.115 30cm Anodized
ELGW115 30cm White RAL9003 mat
ELGB115 30cm Black RAL 9005 mat

ELG.116 50cm Anodized
ELGW116 50cm White RAL9003 mat
ELGB116 50cm Black RAL 9005 mat

ELG.117 60cm Anodized
ELGW117 60cm White RAL9003 mat
ELGB117 60cm Black RAL 9005 mat

ELG.118 100cm Anodized
ELGW118 100cm White RAL9003 mat
ELGB118 100cm Black RAL 9005 mat

ELG.119 120cm Anodized
ELGW119 120cm White RAL9003 mat
ELGB119 120cm Black RAL 9005 mat

Wall brackets

Fixed 5,10,20,30cm Wall brackets INOX-316 (Set of 2)



ELG.015 5cm Passivated
ELGW015 5cm White RAL9003 mat
ELGB015 5cm Black RAL 9005 mat



ELG.016 10cm Passivated
ELGW016 10cm White RAL9003 mat
ELGB016 10cm Black RAL 9005 mat




ELG.017 20cm Passivated
ELGW017 20cm White RAL9003 mat
ELGB017 20cm Black RAL 9005 mat



ELG.018 30cm Passivated
ELGW018 30cm White RAL9003 mat
ELGB018 30cm Black RAL 9005 mat

(RAL colours as extra upon request)

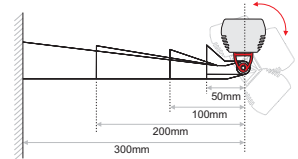

Input & Output cables



Input cable with IP connectors
(as standard for 50/60/100/120cm)



Input & Output cable with IP connectors
(as extra for 50/60/100/120cm)
(as standard for 25/30cmcm)



Input cable (for ECO model)
Open wire ends with ferrules
(as standard for ECO model 50/60/100/120cm)



Input & Output cable with IP connectors
(25/30cm only available in this version)

Extension cables with connectors IP68



2 pole
WIR.546 2pole 100cm
WIR.547 2pole 200cm
WIR.480 2pole 300cm
WIR.481 2pole 500cm

3 pole
WIR.476 3pole 100cm
WIR.477 3pole 200cm
WIR.478 3pole 300cm
WIR.479 3pole 500cm

4 pole
WIR.482 4pole 100cm
WIR.548 4pole 200cm
WIR.483 4pole 300cm
WIR.484 4pole 500cm

5 pole
WIR.549 5pole 100cm
WIR.485 5pole 200cm
WIR.552 5pole 300cm
WIR.486 5pole 500cm