




ELITE

Aluminium Profile



- ELITE aluminium profile ideal for linear LED lighting applications.
- Variety of accessories.
- Multiple mounting options.
- Suitable for waterproof LED strips up to 15mm width.
- Available also in black, white or different RAL colours upon request.





FIXED installation

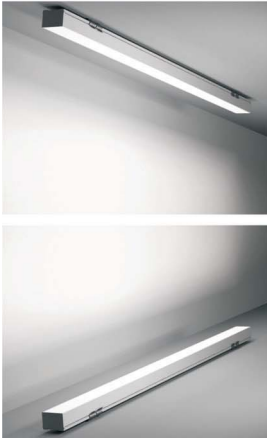


SURFACE installation

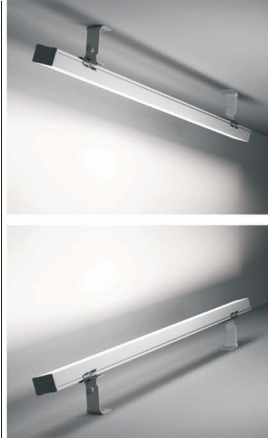

WALL BRACKET (Long-Short) installation

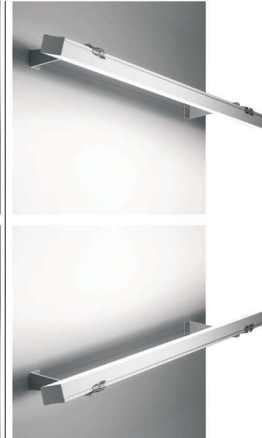

PENDANT installation



Suitable for waterproof LED strips up to 15mm width.



Image	Code	Description	Length	Design-Detail
	PRF.135	ELITE alum.prof. / Anodized	2m	
	COV.035 COV.036 COV.037	POLYCARBONATE CLEAR COVER POLYCARBONATE MILKY SATIN COVER POLYCARBONATE MICROPRISMATIC COVER	2m 2m 2m	
	CAP.144	END CAP		
	ELA.008 ^(1,4)	STAINLESS STEEL HOLDER for FIXED installation		
	ACC.048 ⁽¹⁾	BRACKET for SURFACE installation		
	ACC.284 ⁽²⁾ ACC.285 ⁽²⁾	WALL BRACKET LONG (pair) WALL BRACKET SHORT (pair)		
	ACC.286 ⁽³⁾ ACC.287 ⁽³⁾	CEILING SUSPENSION installation 150cm (per piece) CEILING SUSPENSION installation 300cm (per piece)		

1. Use 2 pcs for lengths up to 100cm. 3 pcs for lengths up to 150cm. 4 pcs for lengths up to 200cm.
2. Use 1 pair for lengths up to 100cm. 1,5 pair for lengths up to 150cm. 2 pairs for lengths up to 200cm.
3. Use 2 pcs for lengths up to 200cm.
4. ELA.008 can be used also as antislipper for vertical installation. Two ELA.008 must be used for every holding, required for the luminaire installation.