


GRETTO DF

(Diffused)

- Gretto Diffused is an outdoor inground luminaire available either round or square.
- It has minimal aesthetic: luminaire installed with no visible screws.
- Body material: aluminium.
- Frame: stainless steel, AISI 316.
- Mounting box: plastic frame casing
- Safety glass: 6mm
- Power cable HO5RN-F 2x0.75mm² L= 1m
- Cable outer diameter: 6.5mm
- Cable gland: IP67
- Static load resistance: 2000 kgs
- Ingress Protection: IP67
- IK Rate: IK07

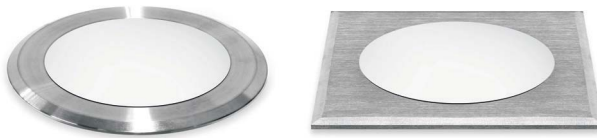

| Model | LED Power | CCT | CR180 LED Source | Beam Angle | Shape | Type | Dimming Option* | Extras |
|---|-----------------|-------------|---------------------|---------------|-----------------------------------|------------|--------------------------------|------------------------------------|
| | | | 80 (80) | | | | | |
| GRETTO Diffused (GRETTO DF) | 2.1W (2) | 2700K (27B) | 261lm | Diffused (DF) | Round (RD) | Fixed (FX) | Without Driver (00) | No Extras (0) Emergency Kit (1) |
| | | 3000K (30B) | 271lm | | Square (SQ) | | 230VAC Non Dimmable (230ND) | |
| | | 4000K (40B) | 286lm | | 24V/48DC Non Dimmable (2448ND) | | | |
| | | | | | | | 24VDC PWM Dimmable (24DM) | |
| | | | | | | | 48VDC PWM Dimmable (48DM) | |

* With external IP68 casing box Dali, Phase cut, 1-10V dimming also possible.

Ordering Code Example: GRETTO DF2-30B-80-DF-SQ-FX-00-0

