


- Gretto Wash is an outdoor inground luminaire available either round or square.
- It has minimal aesthetic: luminaire installed with no visible screws.
- Body material: aluminium.
- Frame: stainless steel, AISI 316.
- Mounting box: plastic frame casing
- Safety glass: 6mm
- Power cable HO5RN-F 2x0.75mm<sup>2</sup> L= 1m
- Cable outer diameter: 6.5mm
- Cable gland: IP67
- Static load resistance: 2000 kgs
- L90/B10 50000h
- Ingress Protection: IP67
- IK Rate: IK07

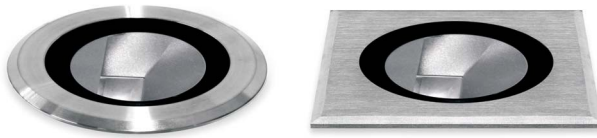

IP67

Model	LED Power	CCT	CRI80 LED Source	CRI90 LED Source	Beam Angle	Shape	Type	Dimming Option*	Extras
			80 (80)	90 (90)					
<b>GRETTO WASH</b> (GRETTO W)	<b>4.1W</b> (4)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	440lm 440lm 475lm 410lm	355lm 380lm 410lm 440lm	Assymetric (AS) 27°x42°	Round (RD) Square (SQ)	Fixed (FX)	Without Driver (00) 230VAC Non Dimmable (230ND) 24V/48DC Non Dimmable (2448ND) 24VDC PWM Dimmable (24DM) 48VDC PWM Dimmable (48DM)	No Extras (0) Emergency Kit (1)

\* With external IP68 casing box Dall, Phase cut, 1-10V dimming also possible.

Ordering Code Example: GRETTO W4-30C-90-AS-RD-FX-00-0

