


- Gretto is an outdoor inground luminaire available either round or square.
- It has minimal aesthetic: luminaire installed with no visible screws.
- Body material: aluminium.
- Frame: stainless steel, AISI 316.
- Mounting box: plastic frame casing
- The luminaire can be customized with the use of softening lens, line spread lens and honeycomb supplied as extra.
- Safety glass: 6mm
- Power cable HO5RN-F 2x0.75mm<sup>2</sup> L= 1m
- Cable outer diameter: 6.5mm
- Cable gland: IP67
- Optics available: lenses
- Static load resistance: 2000 kgs
- UGR<19 (6°, 15°, 30°, 46°)
- L90/B10 50000h
- Ingress Protection: IP67
- IK Rate: IK07

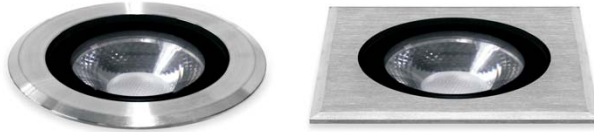

**CREE**  
LEDs

IP67

Model	LED Power	CCT	CRI80 LED Source	CRI90 LED Source	Beam Angle	Shape	Type	Dimming Option*	Accessories
			80 (80)	90 (90)					
<b>GRETTO</b> (GRETTO)	<b>6.5W</b> (7)	2700K (27C)	713lm	570lm	15° (15)	Round (RD)	Fixed (FX)	Without Driver (00)	<b>COVER</b> Standard (0/1) Honeycomb (1/1) Softening lens (2/2) Line spread lens (3/3) ↓ (X/X) ↑ <b>EXTRAS</b> No Extras (1/0) Emergency Kit (1/1)
		3000K (30C)	713lm	615lm	30° (30)	Square (SQ)		24V/48DC Non Dimmable (2448ND)	
		4000K (40C)	765lm	660lm	46° (46)	24VDC PWM Dimmable (24DM)			
		5000K (50C)	765lm	713lm	48VDC PWM Dimmable (48DM)				
		6500K (65C)	765lm	-	230VAC Non Dimmable (230ND)				
	<b>4.1W</b> (4)	2700K (27C)	440lm	355lm	6° (06)			Without Driver (00)	
		3000K (30C)	440lm	380lm				230VAC Non Dimmable (230ND)	
		4000K (40C)	475lm	410lm				24V/48DC Non Dimmable (2448ND)	
		5000K (50C)	510lm	440lm				24VDC PWM Dimmable (24DM)	
								48VDC PWM Dimmable (48DM)	



**ACR.053**  
Honeycomb  
(as extra)



**ACR.050**  
Softening lens  
(as extra)



**ACR.051**  
Line spread lens  
(as extra)

\* With external IP68 casing box Dail, Phase cut, 1-10V dimming also possible.

Ordering Code Example: GRETTO 7-30C-90-46-RD-FX-00-10

