



- Lane series is a complete series of die cast aluminium luminaires.
- It is available in different wattage consumption and each model is offered in different lumen outputs.
- In terms of LED, it is available in different CCTs as standard and it can also be offered upon request (depending on the model) in tunable white TW and individual colours R,G,B,A.
- 3 SDCM
- L90/B10 50000h
- Low UGR (UGR<16 /black mask, UGR<19 /white mask).
- Constant current
- Indoor use: IP40



Luminaire Colour: Trim

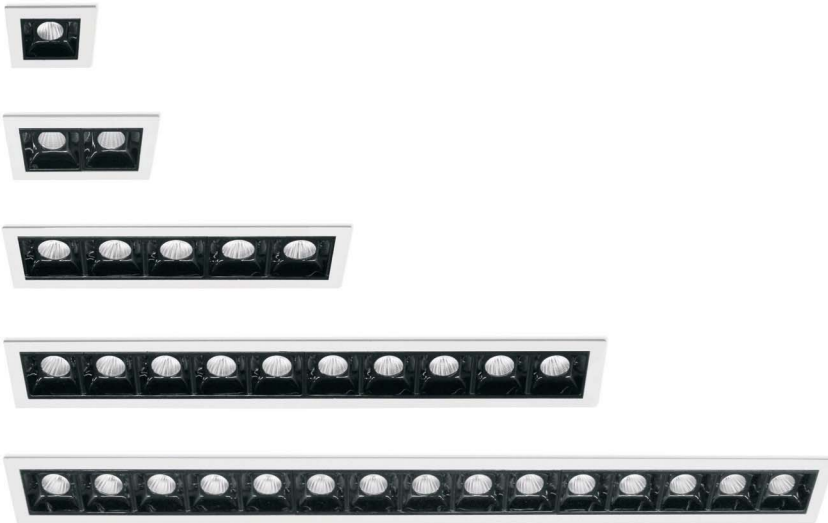


LANE 2W




LANE 4W





LANE 10.5W



LANE 21W



LANE 31W

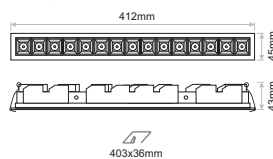

Model (LED Power)	CCT	CRI80 LED Source	CRI90 LED Source	Type	Beam Angle	Luminaire Colour: Trim	Dimming Option	Accessories
		80 (80)	90 (90)					
LANE 2W Recessed (LANE 2 RC)	2700K (27C)	264lm	232lm	Fixed (FX)	15° (15)	White (WH)	Without Driver (00)	EXTRAS No Extras (0) Emergency Kit (1)
	3000K (30C)	264lm	247lm		30° (30)	Black (BL)	Non Dimmable (ND)	
	4000K (40C)	281lm	264lm		45° (45)		Analogue (1-10V) (A1)	
	6500K (65C)	296lm	-				DMX (DX)	
LANE 4W Recessed (LANE 4 RC)	2700K (27C)	528lm	464lm				DALI (DL)	
	3000K (30C)	528lm	494lm				Push Button (PB)	
	4000K (40C)	562lm	528lm				Phase Cut (PC)	
	6500K (65C)	592lm	-				Wireless* (WL)	
LANE 10W Recessed (LANE 10 RC)	2700K (27C)	1320lm	1160lm					
	3000K (30C)	1320lm	1235lm					
	4000K (40C)	1405lm	1320lm					
	6500K (65C)	1480lm	-					
LANE 21W Recessed (LANE 21 RC)	2700K (27C)	2640lm	2320lm					
	3000K (30C)	2640lm	2470lm					
	4000K (40C)	2810lm	2640lm					
	6500K (65C)	2960lm	-					
LANE 31W Recessed (LANE 31 RC)	2700K (27C)	3960lm	3480lm					
	3000K (30C)	3960lm	3705lm					
	4000K (40C)	4215lm	3960lm					
	6500K (65C)	4440lm	-					

* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
LANE 21 RC-30C-80-FX-30-WH-ND-00

