

- Lima series is a complete series of die cast aluminium luminaires.
- It is available in different wattage consumption and each model is offered in different lumen outputs.
- It is available in different beam angles, diffused and wall wash applications.
- It includes models for recessed and trimless installations.
- In terms of LED, it is available in different CCTs as standard and it can also be offered upon request (depending on the model) in tunable white TW and individual colours R,G,B,A.
- 3 SDCM
- L90/B10 50000h
- Constant current
- Indoor use: IP40





LIMA Diffused Recessed 4




 55x35mm

LIMA Diffused Recessed 10




 128x35mm

LIMA Diffused Recessed 21




 248x35mm



Model (LED Power)	CCT	CRI80, CRI90 LED Source		Type	Beam Angle	Luminaire Colour: Mask	Dimming Option	Accessories
		80 (80)	90 (90)					
<b>LIMA Diffused 4W Recessed</b> <i>(LIMA DF 4 RC)</i>	2700K (27C)	528lm	464lm	Fixed (FX)	Diffused (DF)	White (WH) Black (BL)	Without Driver (00)	<b>COVER</b> Standard (0X)  <b>EXTRAS</b> No Extras (X0) Emergency Kit (X1)
	3000K (30C)	528lm	494lm				Non Dimmable (ND)	
	4000K (40C)	562lm	528lm				Analogue (1-10V) (A1) DMX (DX) DALI (DL) Push Button (PB) Phase Cut (PC) Wireless* (WL)	
<b>LIMA Diffused 10W Recessed</b> <i>(LIMA DF 10 RC)</i>	2700K (27C)	1320lm	1160lm					
	3000K (30C)	1320lm	1235lm					
	4000K (40C)	1405lm	1320lm					
<b>LIMA Diffused 21W Recessed</b> <i>(LIMA DF 21 RC)</i>	2700K (27C)	2640lm	2320lm					
	3000K (30C)	2640lm	2470lm					
	4000K (40C)	2810lm	2640lm					
	6500K (65C)	2960lm	-					

\* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: LIMA DF 10 RC-30C-80-FX-DF-WH-ND-00

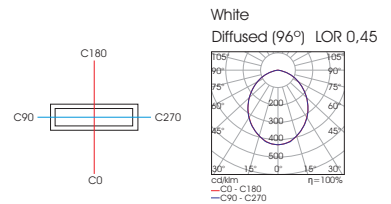

Luminaire Colour:

