






- Lima series is a complete series of die cast aluminium luminaires.
- It is available in different wattage consumption and each model is offered in different lumen outputs.
- In terms of LED, it is available in different CCTs as standard and it can also be offered upon request (depending on the model) in tunable white TW and individual colours R,G,B,A.
- 3 SDCM
- L90/B10 50000h
- Low UGR (UGR<16 /black mask, UGR<19 /white mask).
- Constant current
- Ingress Protection: IP44



Model (LED Power)	CCT	CRI80, CRI90 LED Source		Type	Beam Angle	Luminaire Colour: Trim/Mask	Dimming Option	Accessories
		80 (80)	90 (90)					
<b>LIMA 4W IP44 Recessed</b> <i>(LIMA 4 44RC)</i>	2700K (27C)	528lm	464lm	Fixed (FX)	15° (15)	White/White (WW)	Without Driver (00)	<b>COVER</b> Standard  <b>EXTRAS</b> No Extras (X0) Emergency Kit (X1)
	3000K (30C)	528lm	494lm		30° (30)	White/Black (WB)	Non Dimmable (ND)	
	4000K (40C)	562lm	528lm		50° (50)	Black/Black (BB)	Analogue (1-10V) (A1)	
	6500K (65C)	592lm	-		15°x35° (1535)	Black/White (BW)	DMX (DX)	
							DALI (DL)	
<b>LIMA 10W IP44 Recessed</b> <i>(LIMA 10 44RC)</i>	2700K (27C)	1320lm	1160lm				Push Button (PB)	
	3000K (30C)	1320lm	1235lm				Phase Cut (PC)	
	4000K (40C)	1405lm	1320lm				Wireless* (WL)	
	6500K (65C)	1480lm	-					

\* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: LIMA 10 44RC-30C-80-FX-30-WW-ND-00

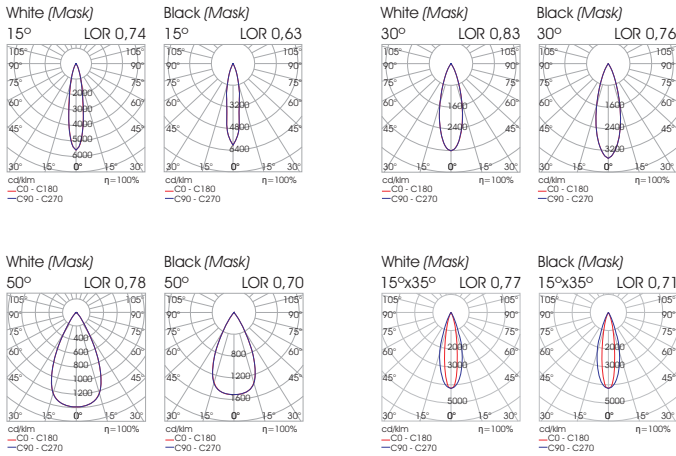

Luminaire Colour: Trim/Mask

