




- Lima series is a complete series of die cast aluminium luminaires.
- It is available in different wattage consumption and each model is offered in different lumen outputs.
- In terms of LED, it is available in different CCTs as standard and it can also be offered upon request (depending on the model) in tunable white TW and individual colours R,G,B,A.
- 3 SDCM
- L90/B10 50000h
- Low UGR (UGR<16 /black mask, UGR<19 /white mask).
- Constant current
- Ingress Protection: IP65 (face only)

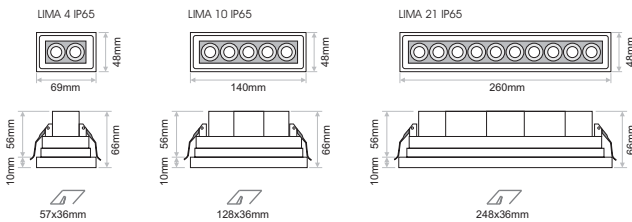

Model (LED Power)	CCT	CRI80, CRI90 LED Source		Type	Beam Angle	Luminaire Colour: Trim/Mask	Dimming Option	Accessories
		80 (80)	90 (90)					
<b>LIMA 4W IP65 Recessed</b> <i>(LIMA 4 65RC)</i>	2700K (27C)	528lm	464lm	Fixed (FX)	15° (15)	White/White (WW)	Without Driver (00)	<b>COVER</b> Standard (0X)  <b>EXTRAS</b> No Extras (X0) Emergency Kit (X1)
	3000K (30C)	528lm	494lm		30° (30)	White/Black (WB)	Non Dimmable (ND)	
	4000K (40C)	562lm	528lm		50° (50)	Black/Black (BB)	Analogue (1-10V) (A1)	
	6500K (65C)	592lm	-		15°x35° (1535)	Black/White (BW)	DMX (DX)	
<b>LIMA 10W IP65 Recessed</b> <i>(LIMA 10 65RC)</i>	2700K (27C)	1320lm	1160lm				DALI (DL)	
	3000K (30C)	1320lm	1235lm				Push Button (PB)	
	4000K (40C)	1405lm	1320lm				Phase Cut (PC)	
	6500K (65C)	1480lm	-				Wireless* (WL)	
<b>LIMA 21W IP65 Recessed</b> <i>(LIMA 21 65RC)</i>	2700K (27C)	2640lm	2320lm					
	3000K (30C)	2640lm	2470lm					
	4000K (40C)	2810lm	2640lm					
	6500K (65C)	2960lm	-					

\* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: LIMA 21 65RC-30C-80-FX-30-WW-ND-00

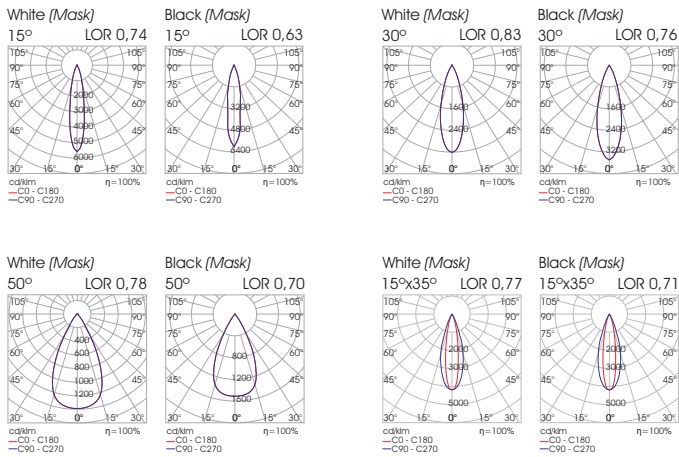

Luminaire Colour: Trim/Mask

