








# LIMA RC ADJUSTABLE


- Lima series is a complete series of die cast aluminium luminaires.
- It is available in different wattage consumption and each model is offered in different lumen outputs.
- It is available in different beam angles, diffused and wall wash applications.
- It includes models for recessed and trimless installations.
- In terms of LED, it is available in different CCTs as standard and it can also be offered upon request (depending on the model) in tunable white TW and individual colours R,G,B,A.
- 3 SDCM
- L90/B10 50000h
- Low UGR [UGR < 16 /black mask, UGR < 19 /white mask].
- Constant current
- Indoor use: IP40



Model (LED Power)	CCT	CRI80, CRI90 LED Source		Type	Beam Angle	Luminaire Colour: Trim/Mask	Dimming Option	Accessories
		80 (80)	90 (90)					
<b>LIMA 42W Recessed Double Adjustable</b> <i>(LIMA 42 RC DA)</i>	2700K (27C)	5280lm	4640lm	Adjustable (AD)	15° (15)	White/White (WW)	Without Driver (00)	<b>COVER</b> Standard (01)  No Extras (X0)  Emergency Kit (X1)  <b>EXTRAS</b> No Extras (X0) Emergency Kit (X1)
	3000K (30C)	5280lm	4940lm		30° (30)	White/Black (WB)	Non Dimmable (ND)	
	4000K (40C)	5620lm	5280lm		50° (50)	Black/Black (BB)	Analogue (1-10V) (A1)	
	6500K (65C)	5920lm	-		15°x35° (1535)	Black/White (BW)	DMX (DX)	
							DALI (DL)	
							Push Button (PB)	
							Phase Cut (PC)	
							Wireless* (WL)	

\* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: LIMA 42 RC DA-30C-80-AD-30-WW-ND-00

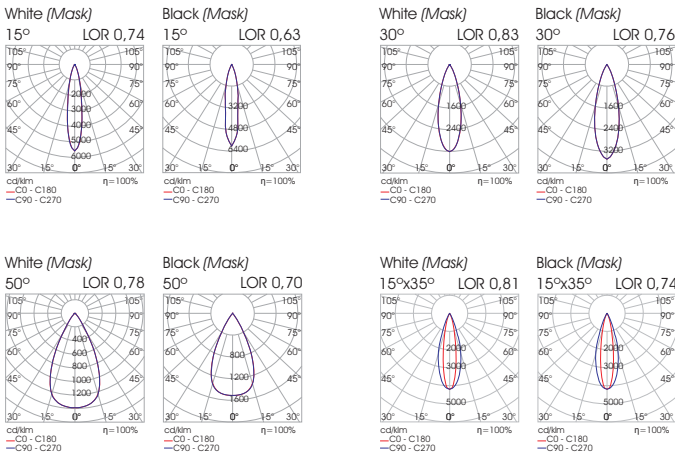

Luminaire Colour: Trim/Mask

