


- Lima series is a complete series of die cast aluminium luminaires.
- It is available in different wattage consumption and each model is offered in different lumen outputs.
- It is available in different beam angles, diffused and wall wash applications.
- It includes models for recessed and trimless installations.
- In terms of LED, it is available in different CCTs as standard and it can also be offered upon request (depending on the model) in tunable white TW and individual colours R,G,B,A.
- 3 SDCM
- L90/B10 50000h
- Low UGR (UGR<16 /black mask, UGR<19 /white mask).
- Constant current
- Indoor use: IP40




LIMA Recessed 4




 55x35mm

LIMA Recessed 10




 128x35mm

LIMA Recessed 21




 248x35mm



Model (LED Power)	CCT	CRI80, CRI90 LED Source	Type	Beam Angle	Luminaire Colour: Trim/Mask	Dimming Option	Accessories
		80 (80) 90 (90)					
LIMA 4W Recessed (LIMA 4 RC)	2700K (27C)	528lm 464lm	Fixed (FX)	15° (15)	White/White (WW)	Without Driver (00)	COVER Standard (0X) EXTRAS No Extras (X0) Emergency Kit (X1)
	3000K (30C)	528lm 494lm		30° (30)	White/Black (WB)	Non Dimmable (ND)	
	4000K (40C)	562lm 528lm		50° (50)	Black/Black (BB)	Analogue (1-10V) (A1)	
	6500K (65C)	592lm -		15°x35° (1535)	Black/White (BW)	DMX (DX) DALI (DL) Push Button (PB) Phase Cut (PC) Wireless* (WL)	
LIMA 10W Recessed (LIMA 10 RC)	2700K (27C)	1320lm 1160lm					
	3000K (30C)	1320lm 1235lm					
	4000K (40C)	1405lm 1320lm					
	6500K (65C)	1480lm -					
LIMA 21W Recessed (LIMA 21 RC)	2700K (27C)	2640lm 2320lm					
	3000K (30C)	2640lm 2470lm					
	4000K (40C)	2810lm 2640lm					
	6500K (65C)	2960lm -					

* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: LIMA 21 RC-30C-80-FX-30-WW-ND-00

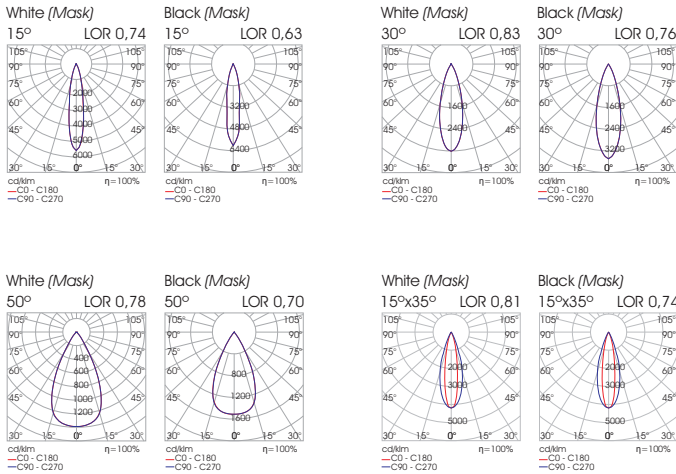

Luminaire Colour: Trim/Mask

