



- Lima series is a complete series of die cast aluminium luminaires.
- It is available in different power consumption and it is offered for recessed or trimless application.
- In terms of LED, it is available in different CCTs as standard and it can also be offered upon request (depending on the model) in tunable white TW and individual colours R,G,B,A.
- 3 SDCM
- L90/B10 50.000h
- Low UGR (UGR<16 /black mask, UGR<19 /white mask).
- Constant current
- Indoor use: IP40




ACC.345
Trimless base



71x37mm




LIMA Trimless 4




ACC.346
Trimless base



131x38mm




LIMA Trimless 10




ACC.390
Trimless base



251x38mm




LIMA Trimless 21



Model (LED Power)	CCT	CR180, CR190 LED Source	Type	Beam Angle	Luminaire Colour: Trim/Mask	Dimming Option	Accessories
		80 (80) 90 (90)					
LIMA 4W Trimless <i>(LIMA 4 TR)</i>	2700K (27C)	528lm	Fixed (FX)	15° (15)	White (WH)	Without Driver (00)	COVER Standard (0X) EXTRAS No Extras (0X) Emergency Kit (X1)
	3000K (30C)	528lm		30° (30)	Black (BL)	Non Dimmable (ND)	
	4000K (40C)	562lm		50° (50)		Analogue (1-10V) (A1)	
	6500K (65C)	592lm		15°x35° (1535)		DMX (DX) DALI (DL) Push Button (PB) Phase Cut (PC) Wireless* (WL)	
LIMA 10W Trimless <i>(LIMA 10 TR)</i>	2700K (27C)	1320lm					
	3000K (30C)	1320lm					
	4000K (40C)	1405lm					
	6500K (65C)	1480lm					
LIMA 21W Trimless <i>(LIMA 21 TR)</i>	2700K (27C)	2640lm					
	3000K (30C)	2640lm					
	4000K (40C)	2810lm					
	6500K (65C)	2960lm					

* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: LIMA 10 TR-30C-80-FX-50-WH-ND-00

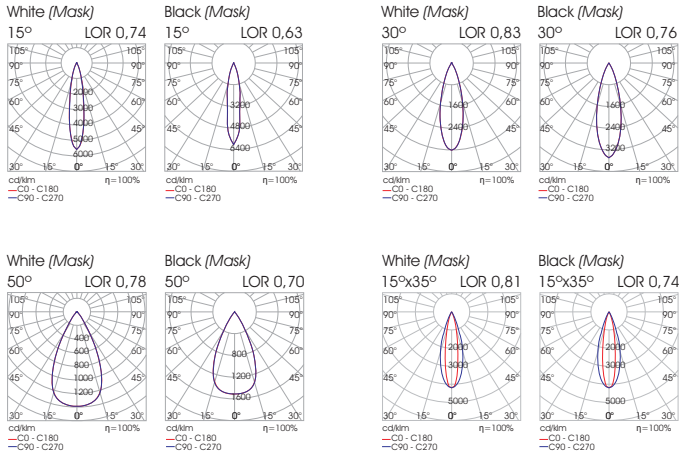

Luminaire Colour: Mask

