

- LIMIT 20/44 is an elegant trimless or recessed downlight available in different sizes.
- Most models may also be 9/12mm lowered from the ceiling offering a special note to any space.
- Limit TR is also available adjustable in 8.7Watt or 12.6Watt.
- The series offers low UGR ensuring visual comfort.
- It is available in either black or white colour.
- It offers a selection of dimming options.
- 3 SDCM
- L90/B10 50.000h
- IP Protection: IP20 or IP44 (face only).

6.4W



8.8W



12.8W & 17W







8.7W & 12.6W Adjustable







position 1

position 2





6.4W





8.8W



12.8W & 17W



8.7W & 12.6W Adjustable



Model	LED Power	CCT**	CRI80, CRI90 LED Source	Beam Angle	Type	Luminaire Colour: Trim/Inner Case	Dimming Option	Accessories	
80 (80) 90 (90)									
<b>LIMIT RC IP20</b> (LIMIT RC20)	<b>6.4W</b> (06)	2700K (27B)	793lm	655lm	19° (19)	Fixed (FX)	White/White (WW) White/Black (WB) Black/Black (BB) Black/White (BW)	Without Driver (00)	No Extras (0) Emergency (1)
		3000K (30B)	843lm	684lm	25° (25)			Non Dimmable (ND)	
		4000K (40B)	867lm	724lm	36° (36)			Analogue (1-10V) (A1)	
		5000K (50B)	878lm	759lm	45° (45)			DMX (DX) DALI (DL) Push Button (PB) Phase Cut (PC) Wireless*** (WL)	
<b>LIMIT RC IP44*</b> (LIMIT RC44)	<b>8.8W</b> (09)	2700K (27B)	1204lm	993lm				Non Dimmable (ND)	
		3000K (30B)	1279lm	1038lm				Analogue (1-10V) (A1)	
		4000K (40B)	1316lm	1098lm				DMX (DX)	
		5000K (50B)	1331lm	1151lm				DALI (DL)	
	<b>12.8W</b> (13)	2700K (27B)	1770lm	1460lm	19° (19)			Non Dimmable (ND)	
		3000K (30B)	1880lm	1525lm	25° (25)			Analogue (1-10V) (A1)	
		4000K (40B)	1935lm	1615lm	36° (36)			DMX (DX)	
		5000K (50B)	1955lm	1690lm	55° (55)			DALI (DL)	
	<b>17W</b> (17)	2700K (27B)	2525lm	2080lm	19° (19)			Non Dimmable (ND)	
		3000K (30B)	2680lm	2180lm	25° (25)			Analogue (1-10V) (A1)	
		4000K (40B)	2760lm	2300lm	36° (36)			DMX (DX)	
		5000K (50B)	2790lm	2415lm	55° (55)			DALI (DL)	
<b>LIMIT RC IP44*</b> <b>Adjustable</b> (LIMIT RC44A)	<b>8.7W</b> (09)	2700K (27B)	1235lm	1020lm	18° (18)	Adjustable (AD)		Non Dimmable (ND)	
		3000K (30B)	1314lm	1065lm	30° (30)			Analogue (1-10V) (A1)	
		4000K (40B)	1355lm	1130lm	50° (50)			DMX (DX)	
		5000K (50B)	1370lm	1180lm				DALI (DL)	
	<b>12.6W</b> (13)	2700K (27B)	1650lm	1360lm				Non Dimmable (ND)	
		3000K (30B)	1750lm	1420lm				Analogue (1-10V) (A1)	
		4000K (40B)	1805lm	1505lm				DMX (DX)	
		5000K (50B)	1825lm	1580lm				DALI (DL)	


\* IP44: face only

\*\* Models with CCTs of 3500K & 6500K are available upon request.


\*\*\* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: LIMIT RC20-13-40B-90-55-FX-BB-DL-0

6.4W

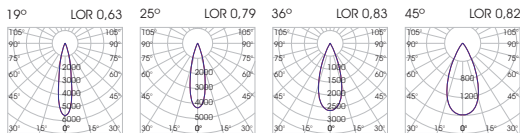

8.8W

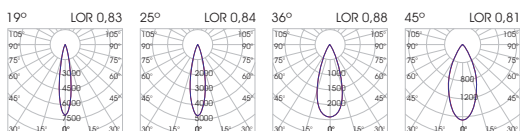

12.8W / 17W

