


- Linibox C is an outdoor luminaire suitable for surface installation.
- It is available in 3 different dimensions.
- Power supply cable required: 3x0,75mm² with maximum external diameter 7mm.
- It is available in black or white colour as standard but RAL colours are also available upon request.
- Dimming options for 8.4W & 12.7W: Without Driver, Phase Cut Dimmable, Non-Dimmable, 24VDC or 48VDC PWM Dimmable.
- Dimming options for 16.8W: Without Driver, Phase Cut Dimmable, Non-Dimmable or 48VDC PWM Dimmable.
- Ingress Protection: IP65
- Glare Rating: UGR <13.7 (17°), <13.1 (21°), <12.5 (25°), <20.6 (35°), <23.6 (62°), <15.7 (16°x30°)

L90/B10 >50.000h



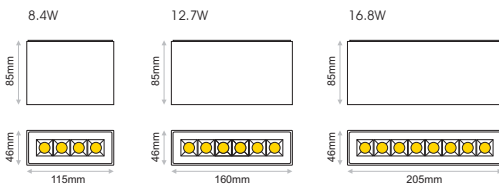

IP65

Model	LED Power	CCT	CRI80, CRI90 LED Source	Type	Beam Angle	Colour	Dimming Option	
LINIBOX C (LINIBOX C)	8.4W (08)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	80 (80) 90 (90)	Fixed (FX)	17° (VN) 21° (NR) 25° (MD) 35° (WD) 62° (VW) 16°x30° (AS)	Black (BL) White (WH)	Without Driver (00)	
			1060lm 860lm				230VAC Non-Dimmable (230ND)	
			1120lm 980lm				230VAC Phase Cut Dimmable* (230D)	
			1180lm 1060lm				24VDC PWM Dimmable (24D)	
			1300lm 1125lm				48VDC PWM Dimmable (48D)	
			12.7W (13)				2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	1590lm 1290lm 1680lm 1470lm 1770lm 1590lm 1950lm 1690lm
	16.8W (17)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	2120lm 1720lm 2240lm 1960lm 2360lm 2120lm 2600lm 2250lm					Without Driver (00) 230VAC Non-Dimmable (230ND) 230VAC Phase Cut Dimmable* (230D) 48VDC PWM Dimmable (48D)

* By trailing edge dimmers.

Ordering Code Example: LINIBOX C-17-40C-80-FX-MD-WH-ND

