
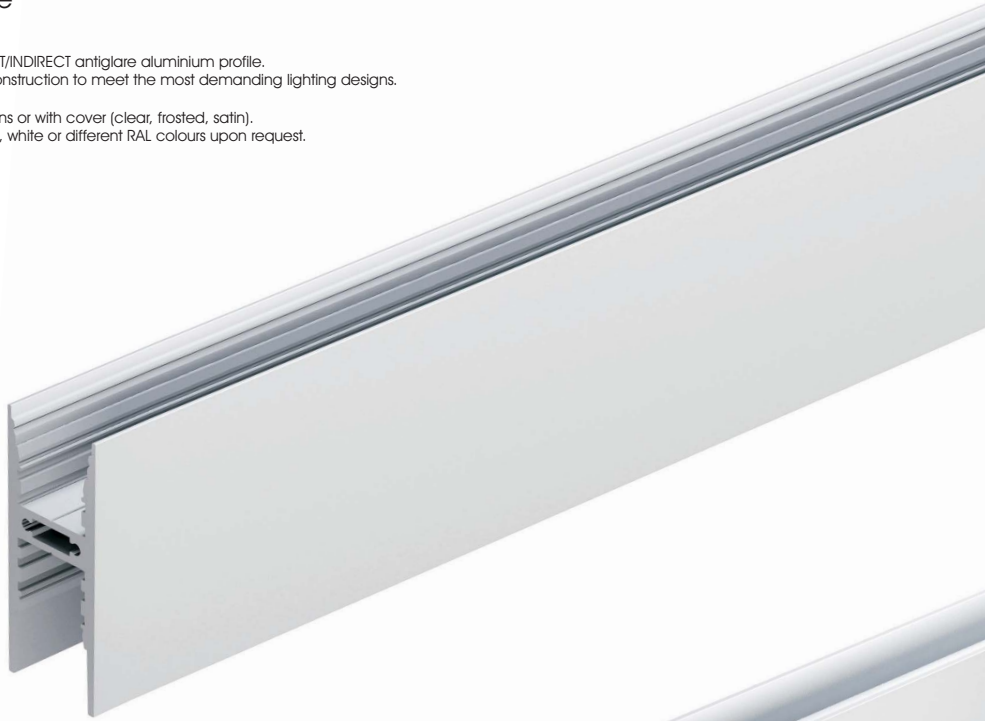


LINILINE PENDANT DIRECT/INDIRECT ANTIGLARE

Aluminium Profile

- Liniline pendant DIRECT/INDIRECT antiglare aluminium profile.
- Special design and construction to meet the most demanding lighting designs.
- Variety of accessories.
- Available either with lens or with cover (clear, frosted, satin).
- Available also in black, white or different RAL colours upon request.



Pendant DIRECT/INDIRECT Antiglare


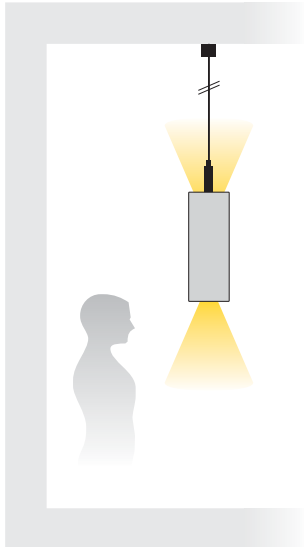


Image	Code	Description	Length	Design-Detail
	PRF.018	LINILINE PENDANT DIRECT/INDIRECT ANTIGLARE alum.prof. / Anodized	2m	
	PRF.117	SLIDING BASE alum.prof. / Anodized	2m	
	COV.033	PMMA LENS COVER Note: At 70° only 10mm LED strip width	2m	
	COV.004 COV.005 COV.006	PMMA CLEAR COVER PMMA FROSTED COVER PMMA SATIN COVER	2m 2m 2m	
	COV.018 COV.017 COV.007	POLYCARBONATE CLEAR COVER POLYCARBONATE OPAL COVER PMMA FROSTED COVER Note: At 70° only 10mm LED strip width	2m 2m 2m	
	CAP.008	END CAP ALUM.		
	PRH.036	HANGING SET FOR LINILINE PENDANT DIRECT/INDIRECT		
	ACC.191* ACC.233*	CEILING SUSPENSION 150cm CEILING SUSPENSION 300cm * Note: 2pcs needed for each luminaire		
	PRH.085	CANOPY SURFACE LIGHT GREY		
	PRH.086	CANOPY RECESSED LIGHT GREY		
	PRH.087	CANOPY TRIMLESS LIGHT GREY		
	PRH.037	CABLE RESTRAINT ON WIRE ROPE		
	PRH.038	CABLE GLAND FOR LINILINE PENDANT		

Create any possible beam angle combination, by choosing cover and sliding base position

Example:

30°



70°

* According to sliding base position and cover type

Canopy also available in black, white or different RAL colours upon request.