
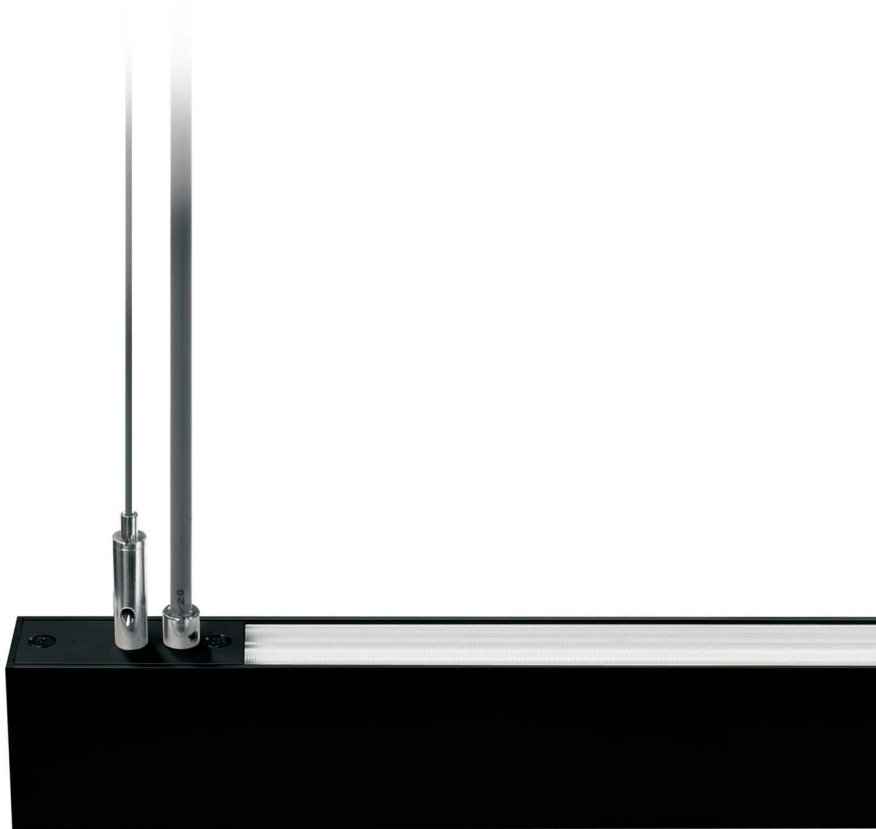



- LINILUX linear luminaire is ideal for corridors in retail lighting due to its asymmetric & double asymmetric lenses.
- Suitable for surface or pendant application.
- L80/B10 50.000h
- 3 SDCM
- Emergency Function capability. (3 hours, with build-in rechargeable battery).
- Ingress Protection: IP40

Available upon request:


- ✓ Custom luminaire colours
- ✓ Emergency version





LINILUX SF
(Surface)



LINILUX PD
(Pendant)




LINILUX PDDI
(Pendant Direct/Indirect)

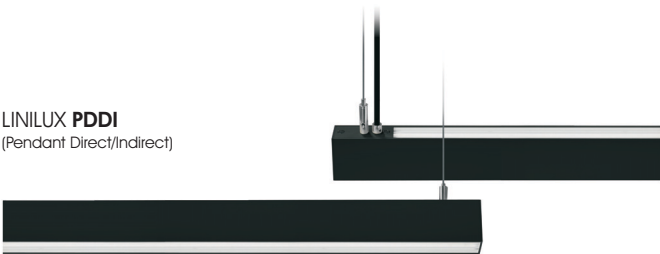


Model	Luminaire Colour	CCT	Watt / Length	CRI ≥ 80 LED Source	Beam Angle	Voltage	Dimming Option	Extras				
≥ 80 (80)												
LINILUX Surface (LINILUX SF)	Anodized (AN)	2700K (27)	17.1W / 57cm (17W057)	2600lm	40° Lens (40)	230VAC (230)	Non Dimmable (ND)	Standard (0)				
	White (WH)		25.6W / 85cm (26W085)	3900lm	60° Lens (60)		Analogue (1-10V) (A1)	Emergency (1)				
	Black (BL)		34.2W / 113cm (34W113)	5200lm	70° Lens (70)			DALI (DL)	Note: All 57cm and 85cm DALI, Analog (1-10), Wireless models are not available with emergency function.			
			42.7W / 141cm (43W141)	6500lm	90° Lens (90)							
	LINILUX Pendant (LINILUX PD)		51.2W / 169cm (51W169)	7800lm	110° Lens (110)					Asymmetric Lens (ASY)	Wireless (WL)	
			59.8W / 197cm (60W197)	9100lm	145° Lens (145)							Double Asymmetric Lens (DAS)
			68.3W / 225cm (68W225)	10400lm								
			76.8W / 253cm (77W253)	11700lm								
			85.4W / 281cm (85W281)	13000lm								
			3000K (30)	17.1W / 57cm (17W057)	2680lm							
				25.6W / 85cm (26W085)	4020lm							
		34.2W / 113cm (34W113)		5360lm								
		42.7W / 141cm (43W141)		6700lm								
		51.2W / 169cm (51W169)		8040lm								
		59.8W / 197cm (60W197)		9380lm								
		68.3W / 225cm (68W225)		10720lm								
		76.8W / 253cm (77W253)		12060lm								
		85.4W / 281cm (85W281)		13400lm								
		4000K (40)	17.1W / 57cm (17W057)	2810lm								
			25.6W / 85cm (26W085)	4215lm								
			34.2W / 113cm (34W113)	5620lm								
			42.7W / 141cm (43W141)	7025lm								
			51.2W / 169cm (51W169)	8430lm								
			59.8W / 197cm (60W197)	9835lm								
			68.3W / 225cm (68W225)	11240lm								
			76.8W / 253cm (77W253)	12645lm								
			85.4W / 281cm (85W281)	14050lm								

Ordering Code Example:
LINILUX SF-AN-30-43W141-80-DAS-230-ND-1

Example:
LINILUX SF
Double Asymmetric Lens


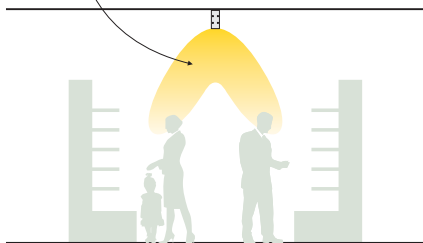


Example:
LINILUX PD
Double Asymmetric Lens

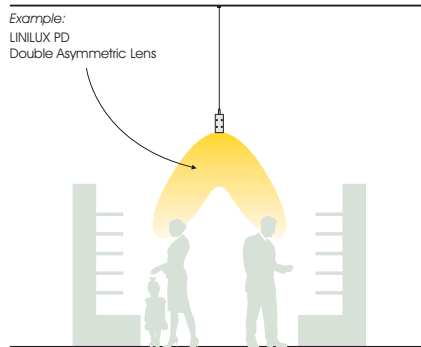

Model	Luminaire Colour	CCT	Watt / Length	CRI ≥80 LED Source DIRECT-INDIRECT	Beam Angle	Voltage	Dimming Option	Extras	
LINILUX Pendant Direct/Indirect <i>(LINILUX PDDI)</i>	Anodized (AN) White (WH) Black (BL)	2700K <i>(27)</i>	24.4W / 57cm <i>(24W057)</i>	2600 - 885lm	DIRECT LIGHTING ↓ (XXXXXXX) ↑ INDIRECT LIGHTING	230VAC <i>(230)</i>	Non Dimmable (ND) Analogue (A1) (1-10V) DALI (DL) Wireless (WL)	EMERGENCY FUNCTION ↓ (XX) ↑ CONTROLS	
			36.6W / 85cm <i>(37W085)</i>	3900-1475lm					
			48.8W / 113cm <i>(49W113)</i>	5200-2065lm					
			61.0W / 141cm <i>(61W141)</i>	6500-2650lm					
			73.2W / 169cm <i>(73W169)</i>	7800-3240lm					
			85.4W / 197cm <i>(85W197)</i>	9100-3830lm					
			93.3W / 225cm <i>(93W225)</i>	10400-4120lm					
			105.4W / 253cm <i>(105W253)</i>	11700-4710lm					
			117.5W / 281cm <i>(118W281)</i>	13000-5300lm					
			24.4W / 57cm <i>(24W057)</i>	2680 - 910lm					DIRECT LENSES: 40° Lens (40) 60° Lens (60) 70° Lens (70) 90° Lens (90) 110° Lens (110) 145° Lens (145) Asymmetric Lens (ASY) Double (DAS) Asymmetric Lens
			36.6W / 85cm <i>(37W085)</i>	4020-1520lm					
			48.8W / 113cm <i>(49W113)</i>	5360-2125lm					
	61.0W / 141cm <i>(61W141)</i>	6700-2735lm							
	73.2W / 169cm <i>(73W169)</i>	8040-3340lm							
	85.4W / 197cm <i>(85W197)</i>	9380-3950lm							
	93.3W / 225cm <i>(93W225)</i>	10720-4255lm							
	105.4W / 253cm <i>(105W253)</i>	12060-4860lm							
	117.5W / 281cm <i>(118W281)</i>	13400-5470lm							
	24.4W / 57cm <i>(24W057)</i>	2810 - 955lm	INDIRECT LENSES: 40° Lens (40) 60° Lens (60) 70° Lens (70) 90° Lens (90) 110° Lens (110) 145° Lens (145)						
	36.6W / 85cm <i>(37W085)</i>	4215-1595lm							
	48.8W / 113cm <i>(49W113)</i>	5620-2230lm							
	61.0W / 141cm <i>(61W141)</i>	7025-2870lm							
	73.2W / 169cm <i>(73W169)</i>	8430-3505lm							
	85.4W / 197cm <i>(85W197)</i>	9835-4145lm							
	93.3W / 225cm <i>(93W225)</i>	11240-4465lm							
	105.4W / 253cm <i>(105W253)</i>	12645-5100lm							
	117.5W / 281cm <i>(118W281)</i>	14050-5740lm							
24.4W / 57cm <i>(24W057)</i>	2810 - 955lm	EMERGENCY FUNCTION: Standard (0) Emergency (1) function <i>Note for standard control:</i> All 57cm and 85cm models are not available with emergency function. <i>Note for separated controls:</i> All 57cm, 85cm and 113cm models, are not available with emergency function. CONTROLS: Standard (0) Separated (1) <i>Note:</i> With control option you can choose one control (standard) for Direct & Indirect lighting or two controls (Separated) for independent control of Direct and Indirect lightings.							
36.6W / 85cm <i>(37W085)</i>	4215-1595lm								
48.8W / 113cm <i>(49W113)</i>	5620-2230lm								
61.0W / 141cm <i>(61W141)</i>	7025-2870lm								
73.2W / 169cm <i>(73W169)</i>	8430-3505lm								
85.4W / 197cm <i>(85W197)</i>	9835-4145lm								
93.3W / 225cm <i>(93W225)</i>	11240-4465lm								
105.4W / 253cm <i>(105W253)</i>	12645-5100lm								
117.5W / 281cm <i>(118W281)</i>	14050-5740lm								


Ordering Code Example:
LINILUX PDDI-AN-30-93W225-80-DAS110-230-ND-11

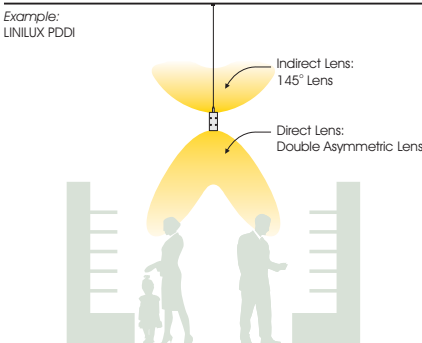

Accessories for Surface (SF)



PRH.102 Line alignment

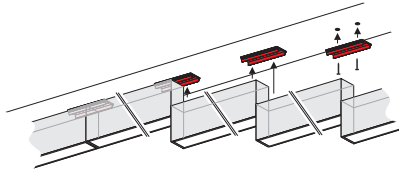


Accessories for Pendant (PD) & Pendant Direct/Indirect (PDDI)




Canopy Surface

- PRH.039 White
- PRH.082 Black
- PRH.085 Light Grey




Canopy Recessed

- PRH.040 White
- PRH.083 Black
- PRH.086 Light Grey




Canopy Trimless

- PRH.041 White
- PRH.084 Black
- PRH.087 Light Grey



PRH.101 Line alignment

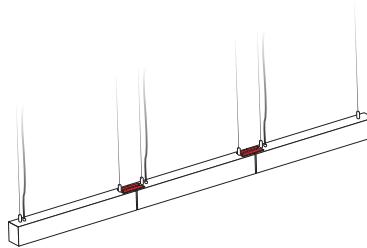

Polar Curves of lenses

